

12/1/76
NEW

SECTION 300
CURVE NO. WL-18-046

WellLine
by


LAYNE & BOWLER, INC.
BOX 8097 MEMPHIS, TN 38108

8 KL

1750 R. P. M.

THIS CURVE SHOWS ONE STAGE PERFORMANCE WITH ENAMELLED CAST IRON BOWL AND BRONZE IMPELLER. EFFICIENCY IS SHOWN FOR 4 STAGES. HORSEPOWER IS SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY.

ONE ()
STAGE STAGES

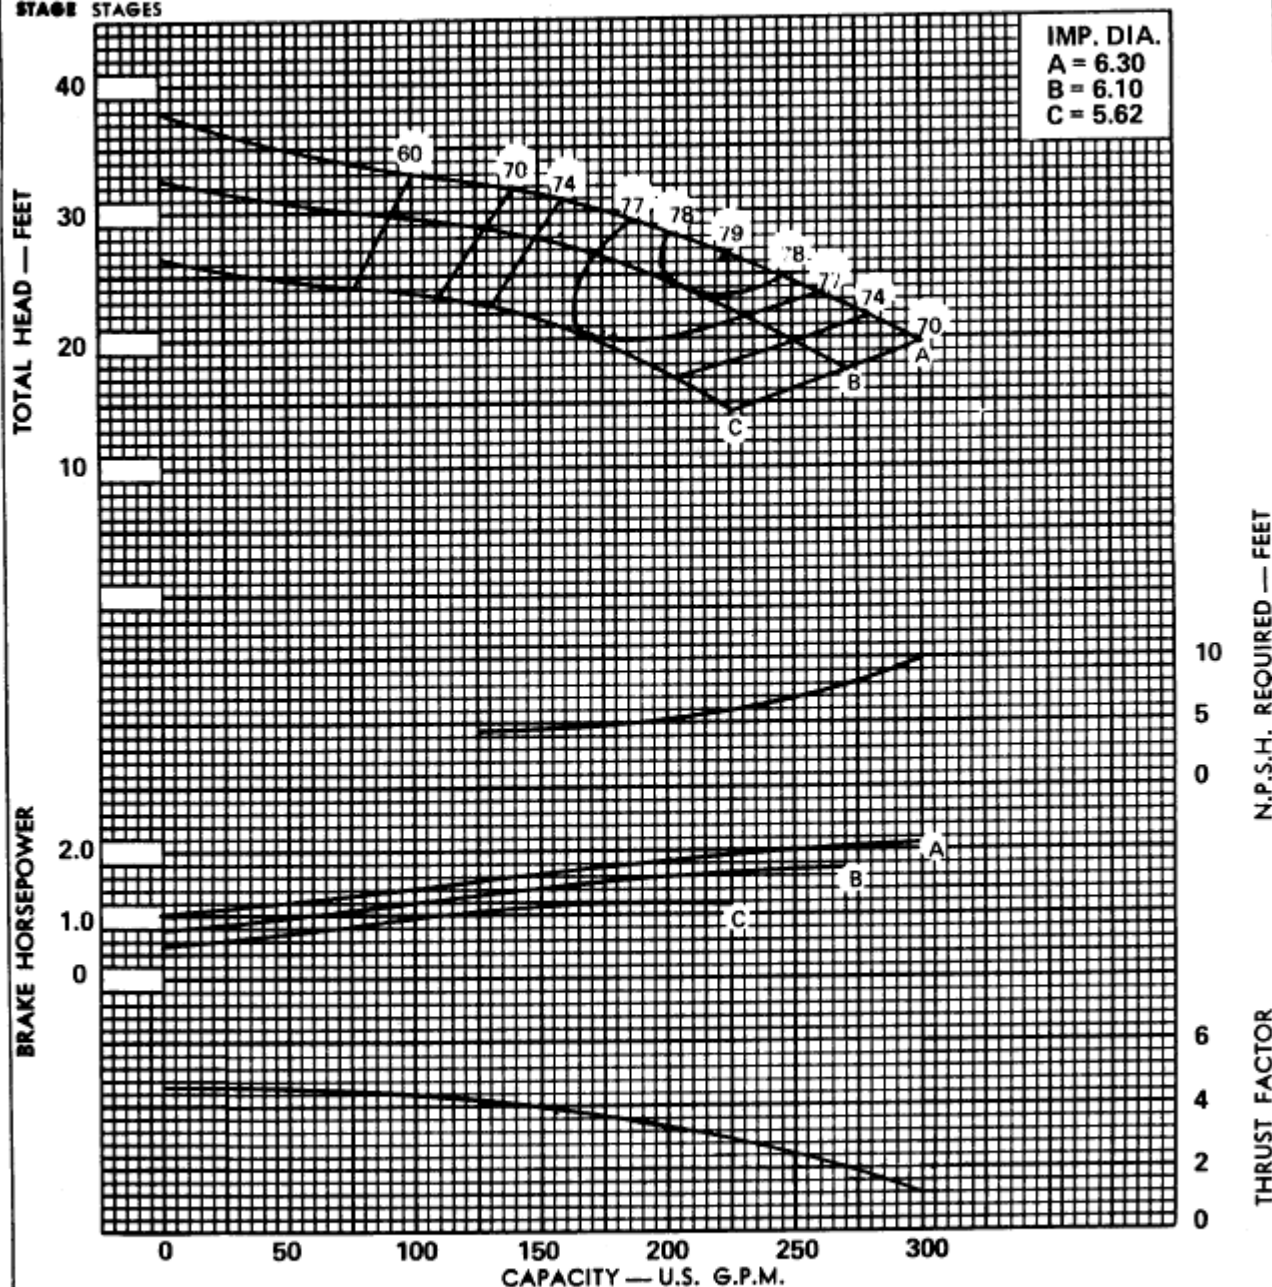

No. Stages	Eff. Change	MATERIAL	Eff. Change	Rotor Wt.	
1	-2	BOWL		= 8.3 lbs.	
2	-1	C. I.	-1	One Stage Wt.	= 115 lbs.
3	-1	C.I. ENM	0	Add One Stage Wt.	= 37 lbs.
4		IMPELLER		Max. No. Stages	= 26
5		BRZ.	0	Discharge Size	= 4.5 in.
6				Suction Size	= 6 in.
				Lateral	= 0.80 in.
				Shaft Diameter	= 1.187 in.

