

7/6/81

SECTION 300

CURVE NO. WL-18-069

Well
Line
 by

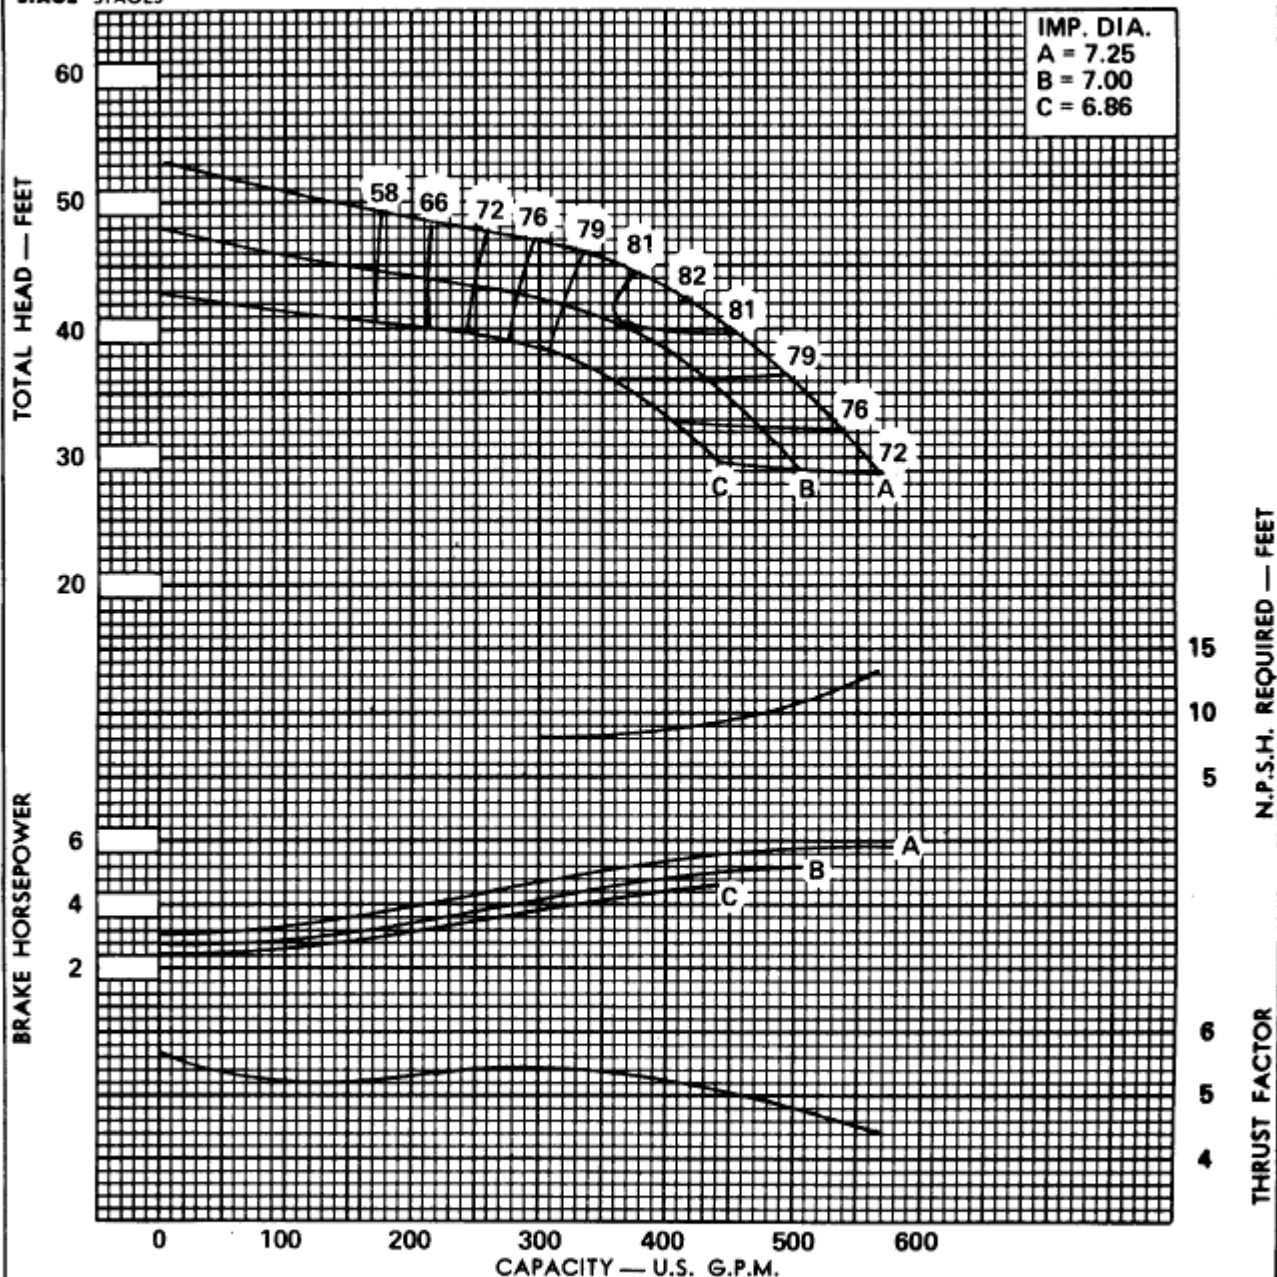
LAYNE & BOWLER, INC.
 BOX 8097 MEMPHIS, TN 38108

9BM

1760

R. P. M.

 THIS CURVE SHOWS ONE STAGE PERFORMANCE
 WITH ENAMELLED CAST IRON BOWL AND BRONZE
 IMPELLER. EFFICIENCY IS SHOWN FOR 4 STAGES.
 HORSEPOWER IS SHOWN FOR ONE STAGE BASED ON
 4 STAGE EFFICIENCY.

 ONE ()
 STAGE STAGES


No. Stages	Eff. Change	MATERIAL	Eff. Change	Rotor Wt.	
1	-4	BOWL		= 13 lbs.	
2	-2	C. I.	-1	One Stage Wt. = 135 lbs.	
3	-1	C. I. ENM	0	Add One Stage Wt. = 53 lbs.	
4	0	IMPELLER		Max. No. Stages = 18	
5		BRZ.	0	Discharge Size = 6 in.	
6				Suction Size = 6 in.	
				Lateral = .76 in.	
				Shaft Diameter = 1.500 in.	

