



MODEL: 225K8		IMPELLER NO:	 STA-RITE INDUSTRIES, INC. Water Equipment Division 293 SOUTH WRIGHT STREET / DELAVAN, WISCONSIN 53115 / U.S.A.
SIZE: 8"		CURVE NO: ST1013	
RPM: 3450	HP: 7½	MAY 3, 1979	

TOTAL HEAD / FEET

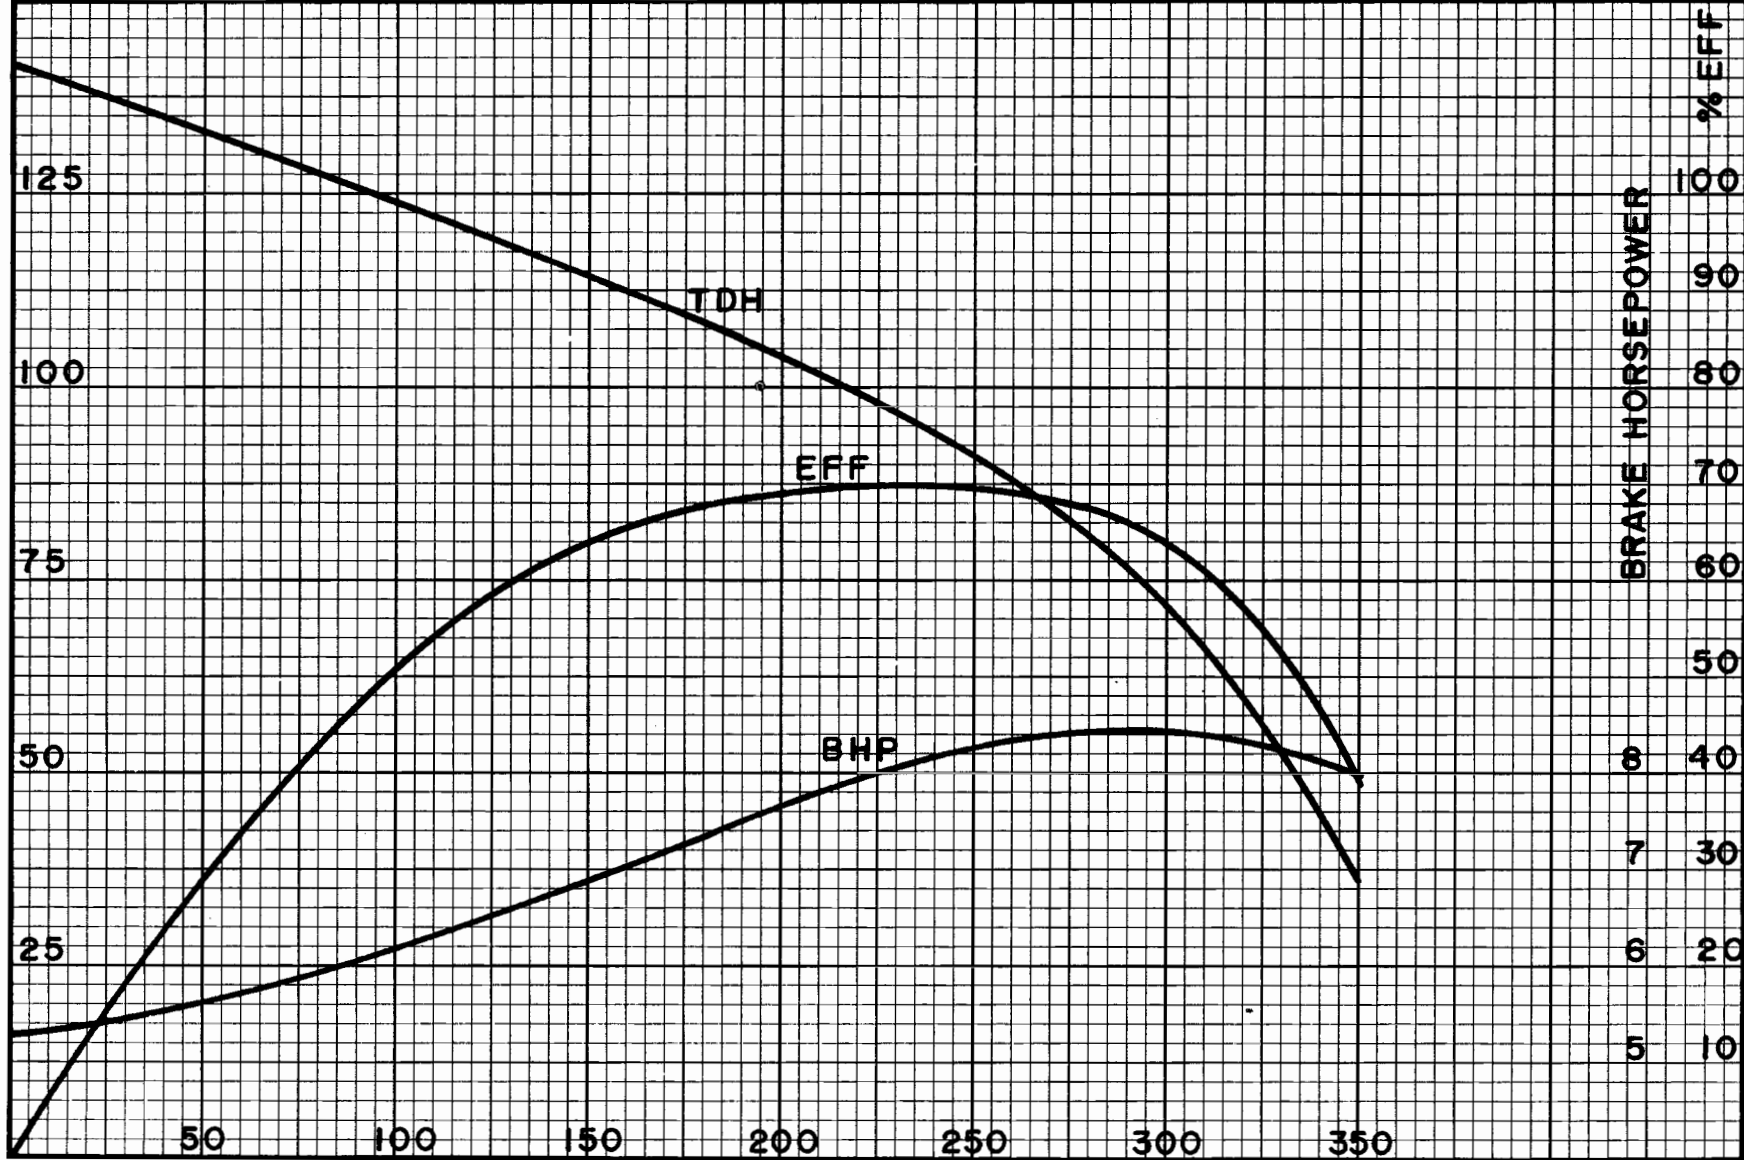

CAPACITY U.S. G.P.M.

DEEP WELL SUBMERSIBLE TURBINE

CURVE No. ST1013

IMPELLER DATA

IMPELLER No. P5-47DA
 TYPE Enclosed - Brass
 DIAMETER 5.650 x 26°
 EFFECTIVE EYE AREA 4.71 Sq. Inches
 NUMBER OF VANES 5
 THRUST CONSTANT K 2.55 Lbs./Ft. of Head
 WR² Lbs. Ft.²
 WEIGHT 4.5 Lbs.
 EYE FLUID VELOCITY .068 Ft./Sec./G.P.M.
 PERIPHERAL VELOCITY 15.05 Ft./Sec./Inch of Impeller Dia.


BOWL ASSEMBLY DATA

BOWL No. P101-56 (C.I.)
 CONNECTION TYPE Screwed
 DISCHARGE TAPPING 6" NPT
 PUMP SHAFT DIA. 1-1/4"
 NUMBER OF STAGES 1

PERFORMANCE DATA

PERFORMANCE CURVE BASED ON 6 " MOTOR
 WITH SPEED OF 3420 RPM AT B.E.P. USE OF
 DIFFERENT SIZE MOTOR, OR DIFFERENT SPEED
 CHARACTERISTIC WILL CHANGE PERFORMANCE.

DIMENSIONS

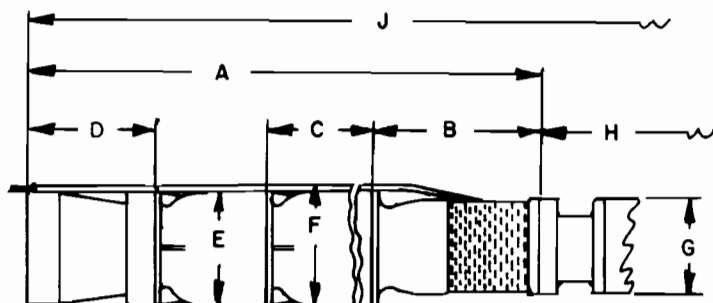

A-OVERALL LIQUID END LENGTH
 B-SUCTION CONNECTION LENGTH
 C-STAGE LENGTH
 D-DISCHARGE CONNECTION LENGTH
 E-BOWL DIAMETER
 F-DIAMETER ACROSS LEAD GUARD
 G-MOTOR DIAMETER
 H-MOTOR LENGTH
 J-OVERALL PUMP LENGTH-INCLUDING MOTOR

DIMENSION	A	B	C	D	E	F	G	H	J
INCHES	27-1/8	13-3/8	5-5/8	8-1/8	7-3/8	7-15/16	5-1/2	29-15/16-10	57-1/16-10
							5-1/2	26-15/16-30	54-1/8 - 30

UNIT WEIGHTS - POUNDS

MOTOR SIZE	6"	6"
PUMP INCLUDING MOTOR	252 - 10	234 - 30
LIQUID END ONLY	108	