


MODEL: 325N6

SIZE: 6"

RPM: 3450

HP: 20

CURVE NO: ST1007




STAR-RITE INDUSTRIES, INC.

Water Equipment Division

293 SOUTH WRIGHT STREET / DELAVAN, WISCONSIN 53115 / U.S.A.

DATE: FEB. 5, 1979

TOTAL HEAD / FEET

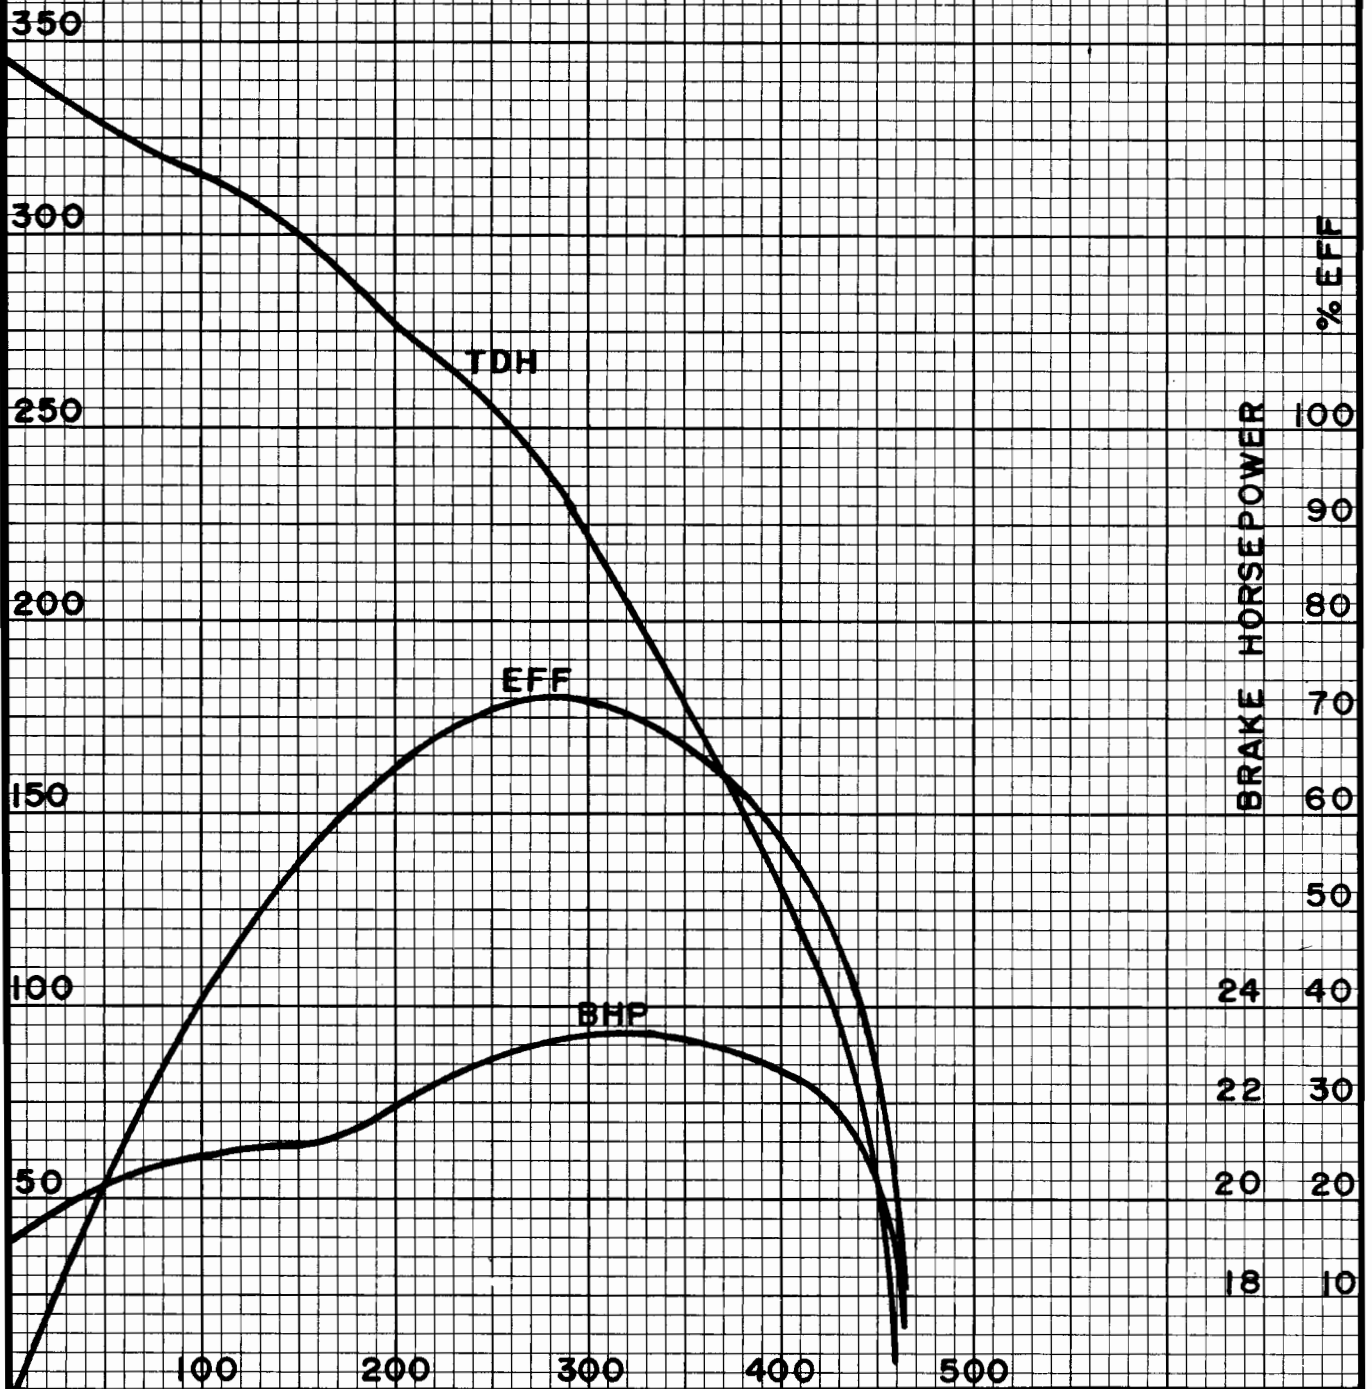

CAPACITY U.S. G.P.M.

DEEP WELL SUBMERSIBLE TURBINE

CURVE No. ST1007

IMPELLER DATA

IMPELLER No. P5-32DB
 TYPE Enclosed - Brass
 DIAMETER 3.620 x 26°
 EFFECTIVE EYE AREA 6.28 Sq. Inches
 NUMBER OF VANES 7
 THRUST CONSTANT K 2.65 Lbs./Ft. of Head
 WR² Lbs. Ft.²
 WEIGHT 1.7 Lbs.
 EYE FLUID VELOCITY 0.051 Ft./Sec./G.P.M.
 PERIPHERAL VELOCITY 15.05 Ft./Sec./Inch of Impeller Dia.


BOWL ASSEMBLY DATA

BOWL No. P101-47B (C.I.)
 CONNECTION TYPE Screwed
 DISCHARGE TAPPING 4" NPT
 PUMP SHAFT DIA. 1"
 NUMBER OF STAGES 6

PERFORMANCE DATA

PERFORMANCE CURVE BASED ON 6 " MOTOR
 WITH SPEED OF 3400 RPM AT B.E.P. USE OF
 DIFFERENT SIZE MOTOR, OR DIFFERENT SPEED
 CHARACTERISTIC WILL CHANGE PERFORMANCE.

DIMENSIONS

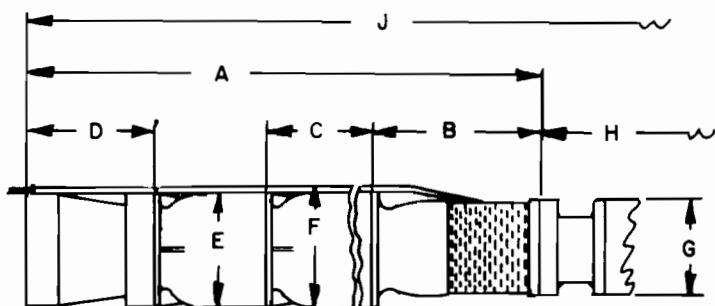

A-OVERALL LIQUID END LENGTH
 B-SUCTION CONNECTION LENGTH
 C-STAGE LENGTH
 D-DISCHARGE CONNECTION LENGTH
 E-BOWL DIAMETER
 F-DIAMETER ACROSS LEAD GUARD
 G-MOTOR DIAMETER
 H-MOTOR LENGTH
 J-OVERALL PUMP LENGTH-INCLUDING MOTOR

DIMENSION	A	B	C	D	E	F	G	H	J
INCHES	48-3/4	12-1/4	4-7/8	7-7/32	5-3/8	5-15/16	5-1/2	36-1/4	84-15/16

UNIT WEIGHTS - POUNDS

MOTOR SIZE	6"	
PUMP INCLUDING MOTOR	296.5	
LIQUID END ONLY	124.5	