
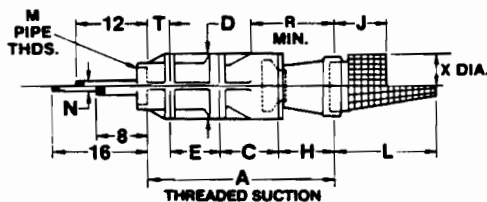



**1160 RPM
SINGLE STAGE PERFORMANCE**

**MODEL 15CCH
ENCLOSED IMPELLER
STANDARD CONSTRUCTION**

☐ STAGES REQUIRED

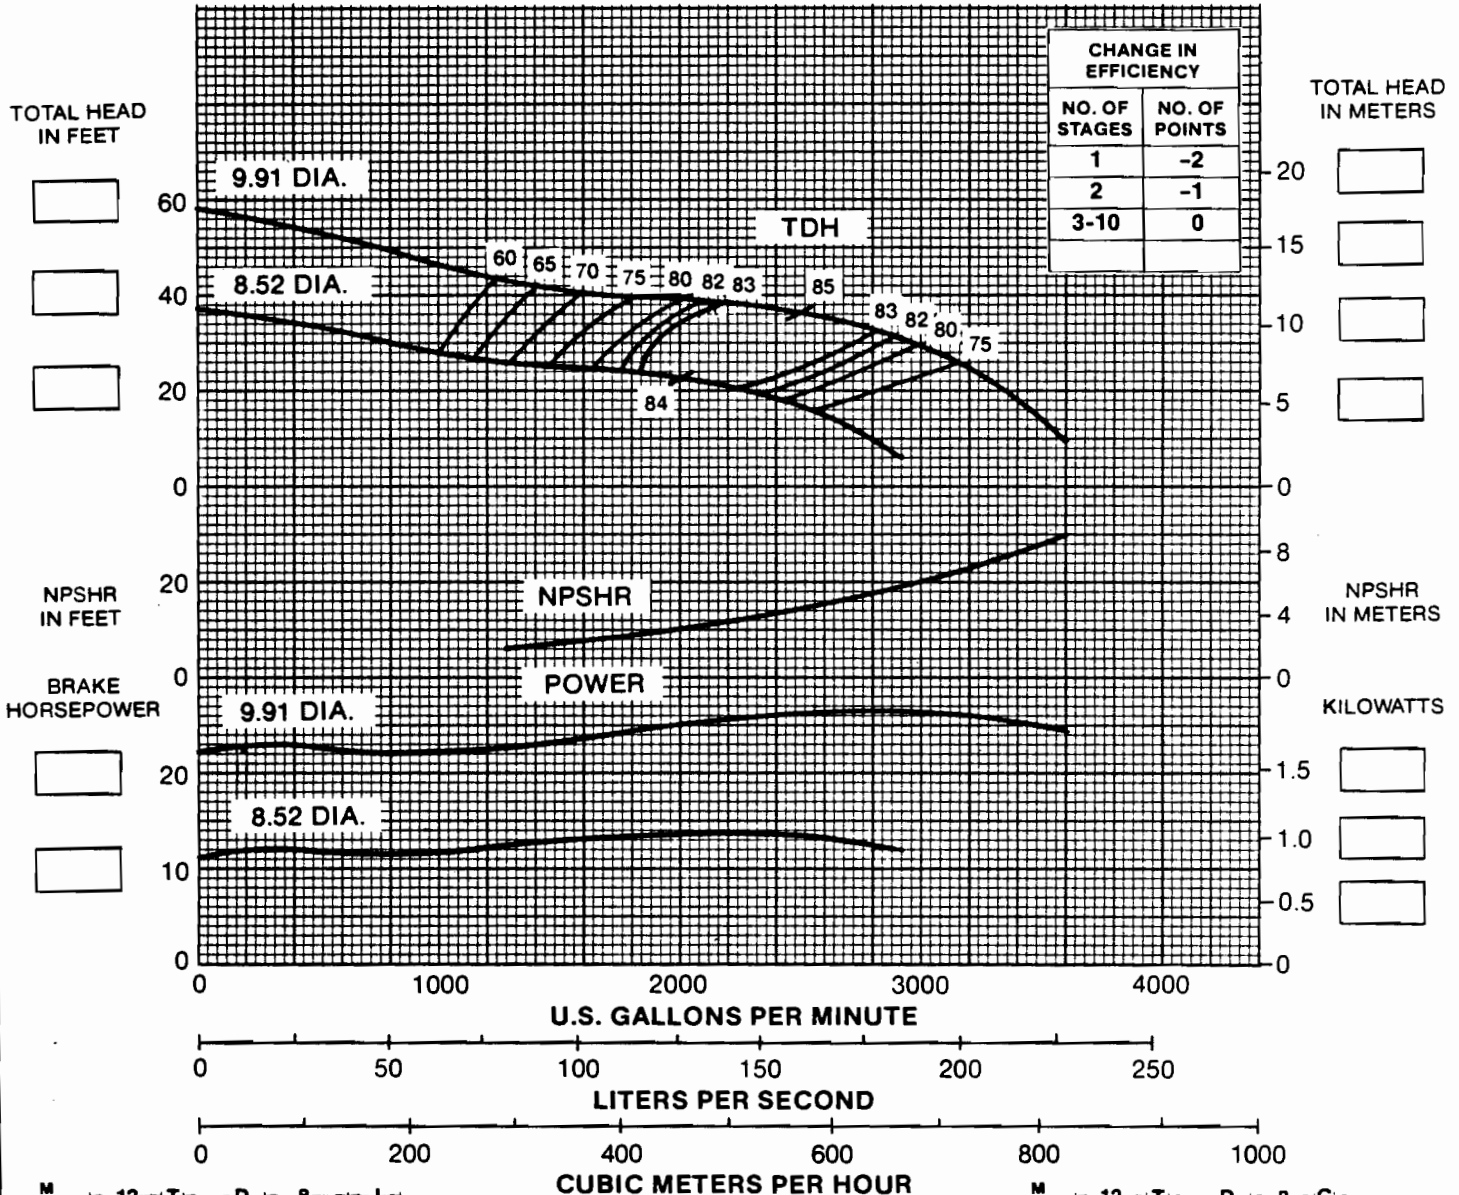

PUMP HYDRAULIC PERFORMANCE IS BASED ON STANDARD MATERIALS OF CONSTRUCTION HANDLING COLD, CLEAR, FRESH, NONAERATED WATER. FREE OF FOREIGN MATERIALS LOSSES ARE NOT INCLUDED

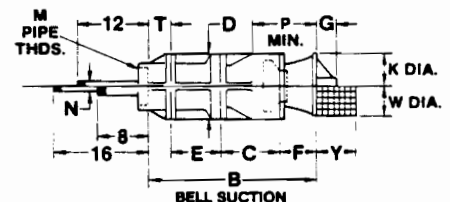

STANDARD DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	W	X	Y
IN.	34 3/8	32 3/8	15 1/4	14 3/8	5 3/8	8 1/8	4 3/8	9 7/8	16	14 3/8	31 3/8	12	1 15/16	29 1/2	31 1/4	3 3/8	15 3/8	18	10
MM.	866.7	822.3	387.4	374.6	136.5	206.3	120.65	250.8	406.4	374.6	797	304.8	49.2	749.3	793.8	92.1	396.8	457.2	254

STANDARD DATA

IMPELLER NO.	SPECIFIC SPEED	THRUST FACTOR K	SHAFT DIAMETER	STANDARD AXIAL CLEARANCE	MAX. STAGES	MAX. PRESSURE	DISCHARGE SIZE	SUCTION SIZE	SINGLE STAGE WEIGHTS		WEIGHT EACH ADDITIONAL STAGE
									THREADED SUCTION	BELL SUCTION	
315813	3971	25.4 lb/ft	1.9375 in	1.125 in	10	280 psi	10, 12 in	10, 12 in	613 lb	573 lb	189 lb
		370.84N/m	49.2 mm	28.57 mm		1930 kPa	254, 304.8mm	254, 304.8mm	278.3 Kg	260.14 Kg	85.8 Kg

Refer to Section C and I for thrust curves, optional materials, construction and engineering data