
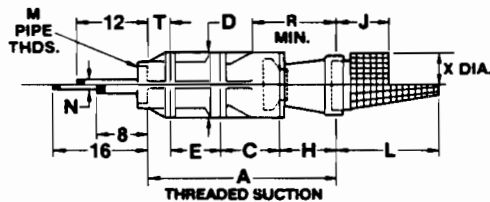


**1160 RPM
SINGLE STAGE PERFORMANCE**


**MODEL 15CCL
ENCLOSED IMPELLER
STANDARD CONSTRUCTION**

☐ STAGES REQUIRED

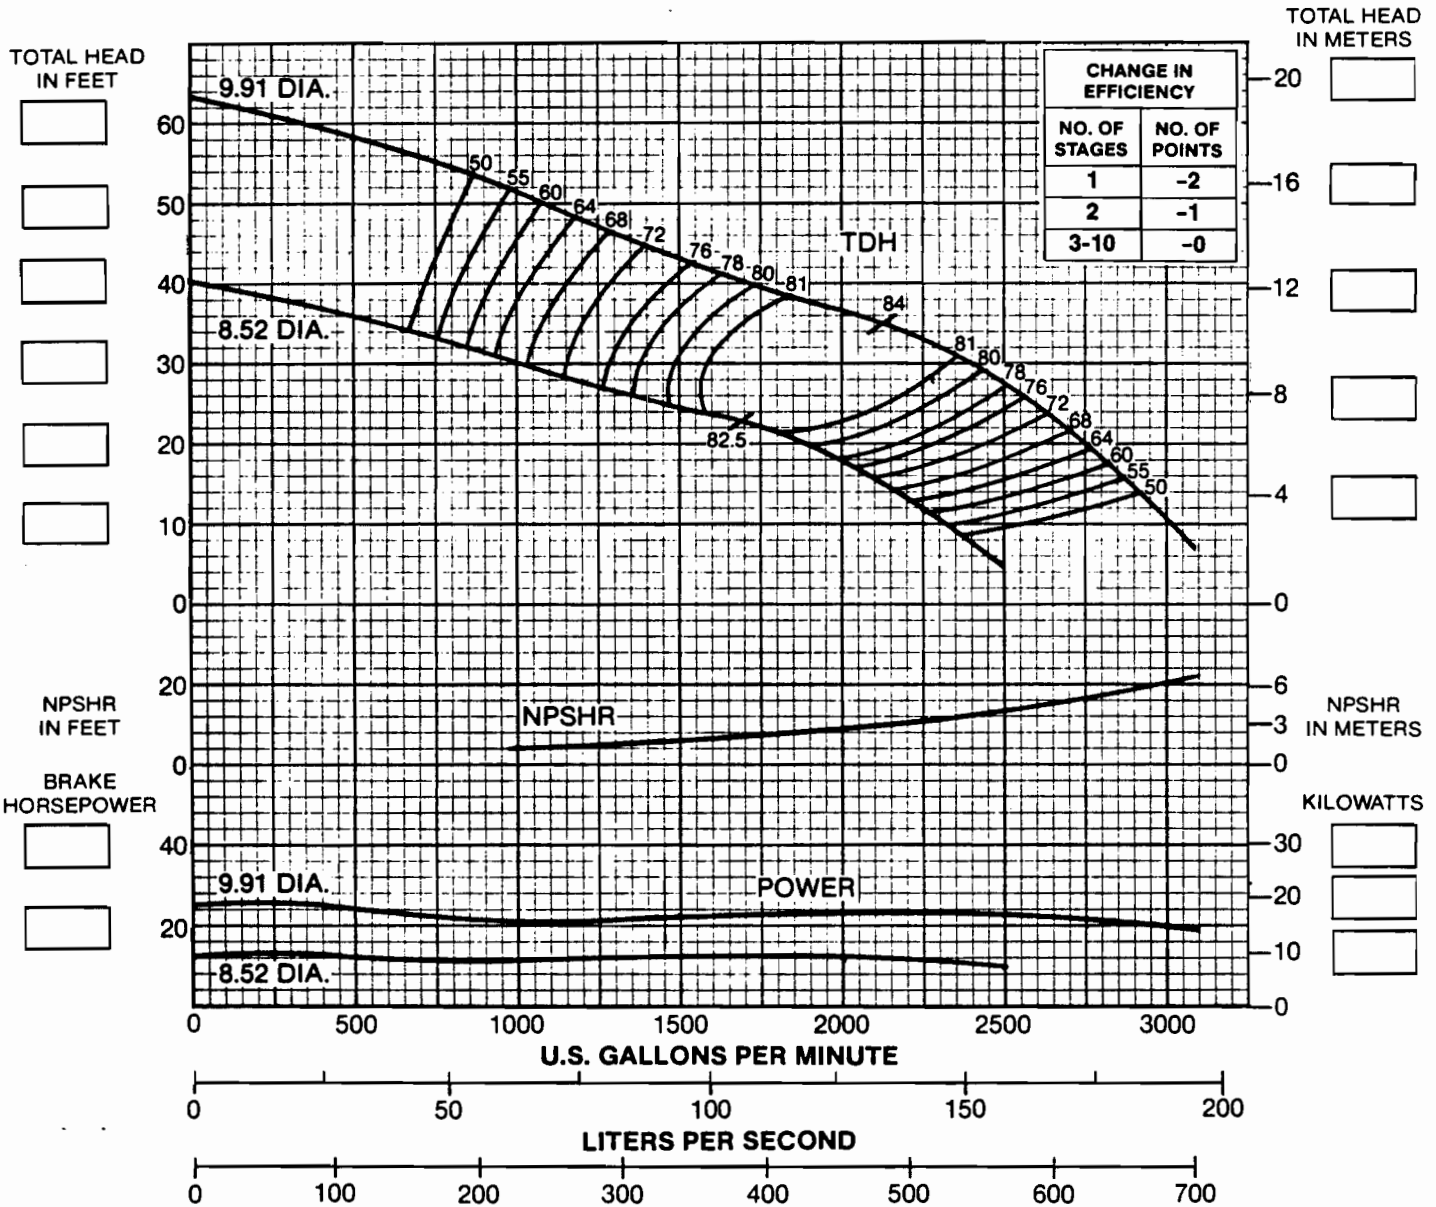

CUBIC METERS PER HOUR

PUMP HYDRAULIC PERFORMANCE IS BASED ON STANDARD MATERIALS OF CONSTRUCTION HANDLING COLD, CLEAR, FRESH, NONAERATED WATER, FREE OF FOREIGN MATERIALS. LOSSES ARE NOT INCLUDED

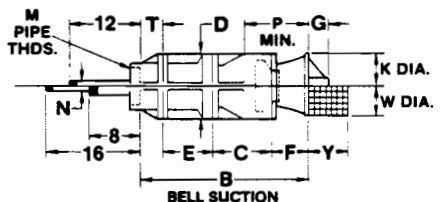

STANDARD DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	W	X	Y
IN.	34 1/8	32 3/8	15 1/4	14 3/8	5 3/8	8 1/8	4 3/8	9 7/8	16	14 3/8	31 3/8	10	1 15/16	29 1/2	31 1/4	3 3/8	15 3/8	18	10
MM.	866.7	822.3	387.4	374.6	136.5	206.3	120.65	250.8	406.4	374.6	797	254	49.2	749.3	793.8	92.1	396.8	457.2	254

STANDARD DATA

IMPELLER NO.	SPECIFIC SPEED	THRUST FACTOR K	SHAFT DIAMETER	STANDARD AXIAL CLEARANCE	MAX. STAGES	MAX. PRESSURE	DISCHARGE SIZE	SUCTION SIZE	SINGLE STAGE WEIGHTS		WEIGHT EACH ADDITIONAL STAGE
									THREADED SUCTION	BELL SUCTION	
315810	3669	25.4 lb/r	1.9375 in	1.125 in	10	280 psi	10, 12 in	10, 12 in	613 lb	573 lb	189 lb
		370.84 N/m	49.2 mm	28.57 mm		1930.5 kPa	254, 304.8 mm	254, 304.8 mm	278.3 Kg	260.14 Kg	85.8 Kg

Refer to Section C and I for thrust curves, optional materials, construction and engineering data.