
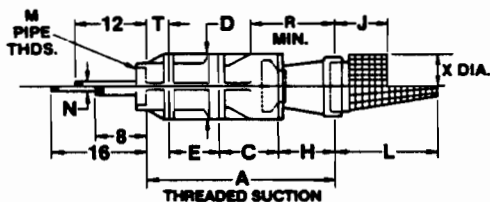



**1770 RPM
SINGLE STAGE PERFORMANCE**

**MODEL 6CCH
ENCLOSED IMPELLER
STANDARD CONSTRUCTION**

☐ STAGES REQUIRED

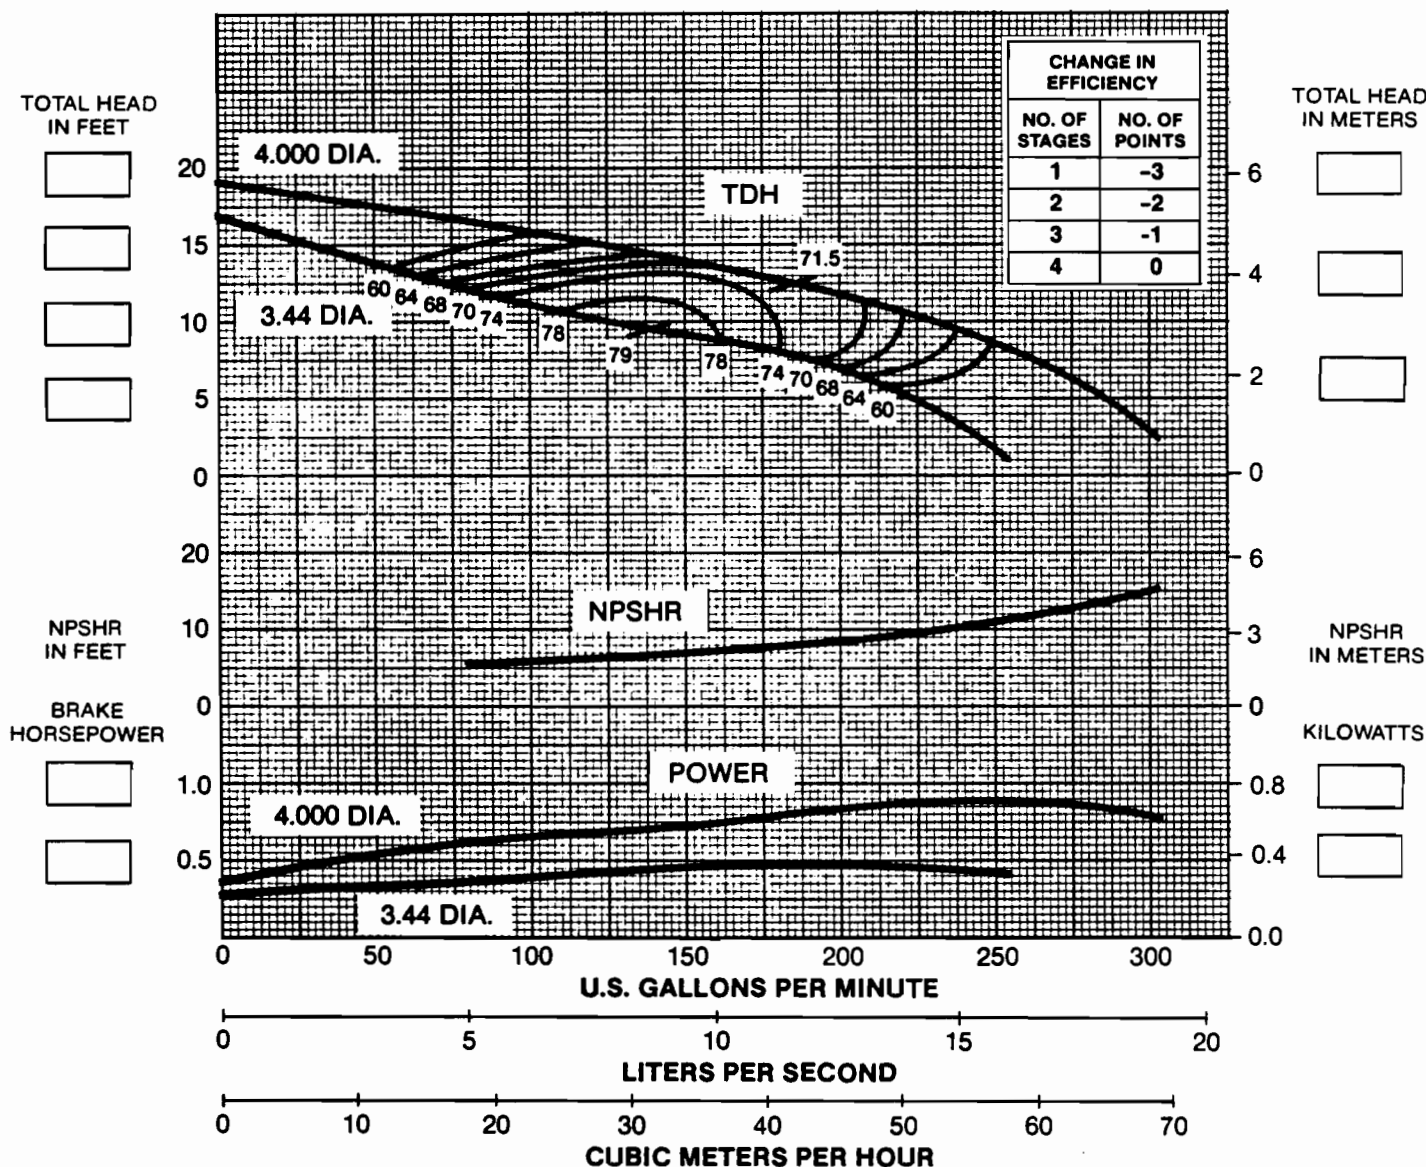

PUMP HYDRAULIC PERFORMANCE IS BASED ON STANDARD MATERIALS OF CONSTRUCTION HANDLING COLD, CLEAR, FRESH, NONAERATED WATER, FREE OF FOREIGN MATERIALS. LOSSES ARE NOT INCLUDED.

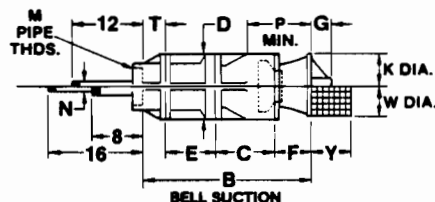

STANDARD DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	W	X	Y
IN.	17 ¹ / ₁₆	15 ¹ / ₁₆	5 ¹ / ₁₆	5 ¹ / ₂	6 ¹ / ₂	3	3 ¹ / ₄	5 ¹ / ₂	7	5 ¹ / ₈	12 ³ / ₄	4	1	12	14 ¹ / ₂	3 ¹ / ₂	6 ¹ / ₄	8	5 ¹ / ₄
MM.	446.1	382.6	141.3	139.7	165.1	76.2	82.6	139.7	177.8	146.1	323.9	101.6	25.4	304.8	368.3	88.9	158.8	203.2	133.4

STANDARD DATA

IMPELLER NO.	SPECIFIC SPEED	THRUST FACTOR K	SHAFT DIAMETER	STANDARD AXIAL CLEARANCE	MAX. STAGES	MAX. PRESSURE	DISCHARGE SIZE	SUCTION SIZE	SINGLE STAGE WEIGHTS		WEIGHT EACH ADDITIONAL STAGE
									THREADED SUCTION	BELL SUCTION	
306848	3667	1.2 lb/r	1.00 in	1 ¹ / ₃₂ in	20	500 psi	4 in	4 in	58 lb	51 lb	17 ¹ / ₂ lb
		17.5 N/m	25.4 mm	11.9 mm		3448 kPa	101.6 mm	101.6 mm	26.3 Kg	22.9 Kg	7.9 Kg

Refer to Section C and I for thrust curves, optional materials, construction and engineering data.