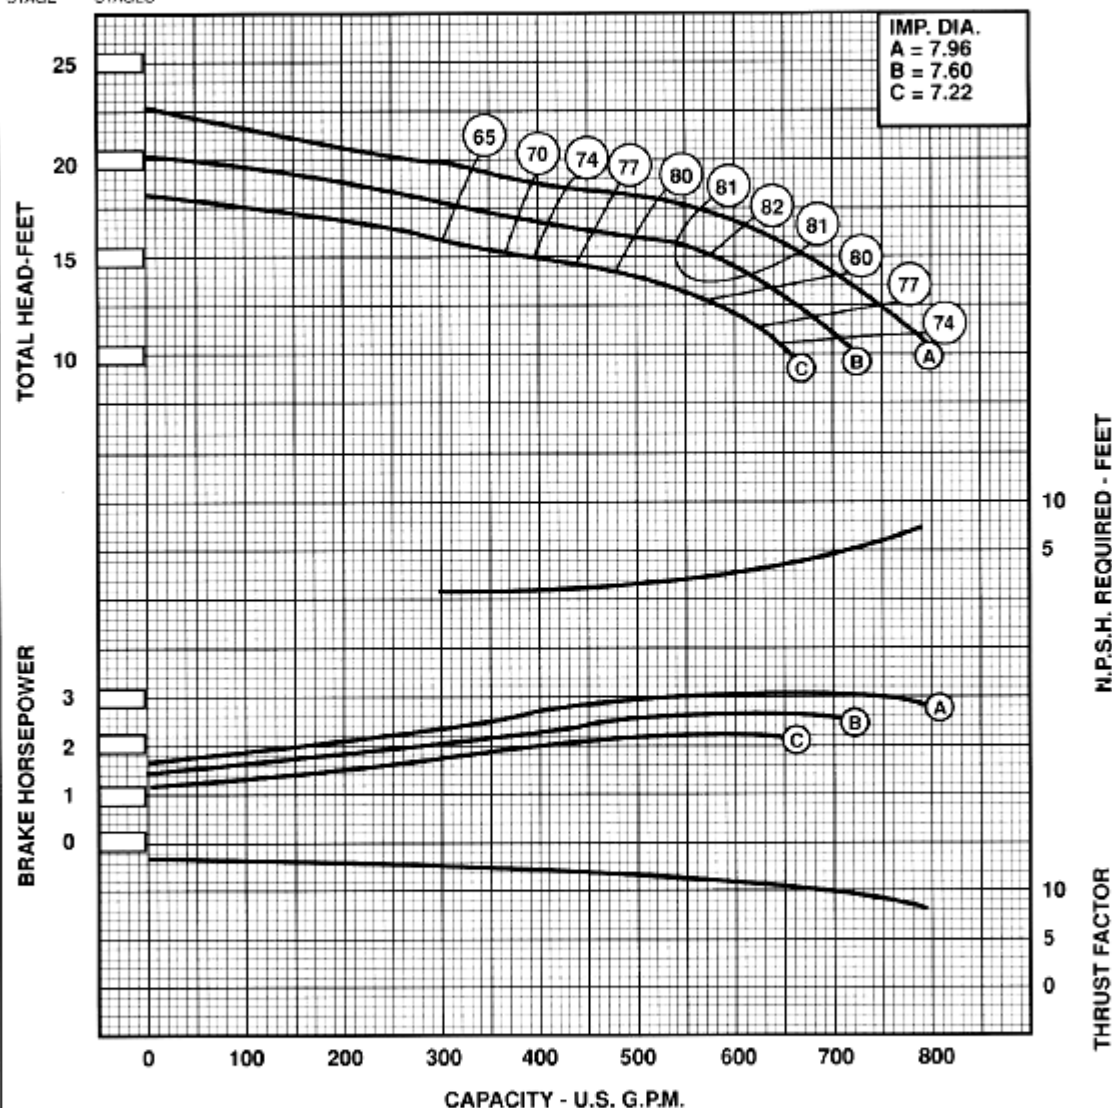


CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP - C.I.	-2
2	-2	IMP - NI-RI	-1
3	-1	BOWL - BRZ	-1
4	0	BOWL - NI-R	-1

10 CHHC**1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 19.23	IMPELLER WT. - LBS.	= 15.4
WPI PER IMPELLER LB.-FT. ²	= 0.62	ONE STAGE WT. - LBS.	= 200
MAX. SPHERE SIZE	= —	ADD'L STAGE WT. - LBS.	= 73
MAX. NO. STD. STAGES	= 45	IMPELLER NUMBER	= —
MAX. OPERATING - P.S.I.	= 450	DISCH. - IN.	= 6.7, 8
STD. LATERAL - IN.	= 0.44	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.50	MAX. LATERAL - IN.	= —
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. - THREADED - COLLET	= —
MIN. SUBMERGENCE - IN.	= 21	ADD 7.7/8" PER ADDITIONAL STAGE	= —

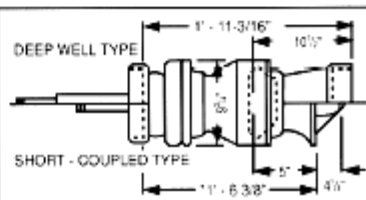

Curves reflect typical performance, refer to factory for certification.