


## CURVE data

**Verli-Line®**


| No. Stages | Eff. Change | MATERIAL     | Eff. Change |
|------------|-------------|--------------|-------------|
| 1          | -3          | IMP. - C.I.  | -1          |
| 2          | -2          | IMP. - NI-RI | -1          |
| 3          | -1          | BOWL - BRZ   | -2          |
| 4          | 0           | BOWL - NI-R. | -2          |

**10RM****1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

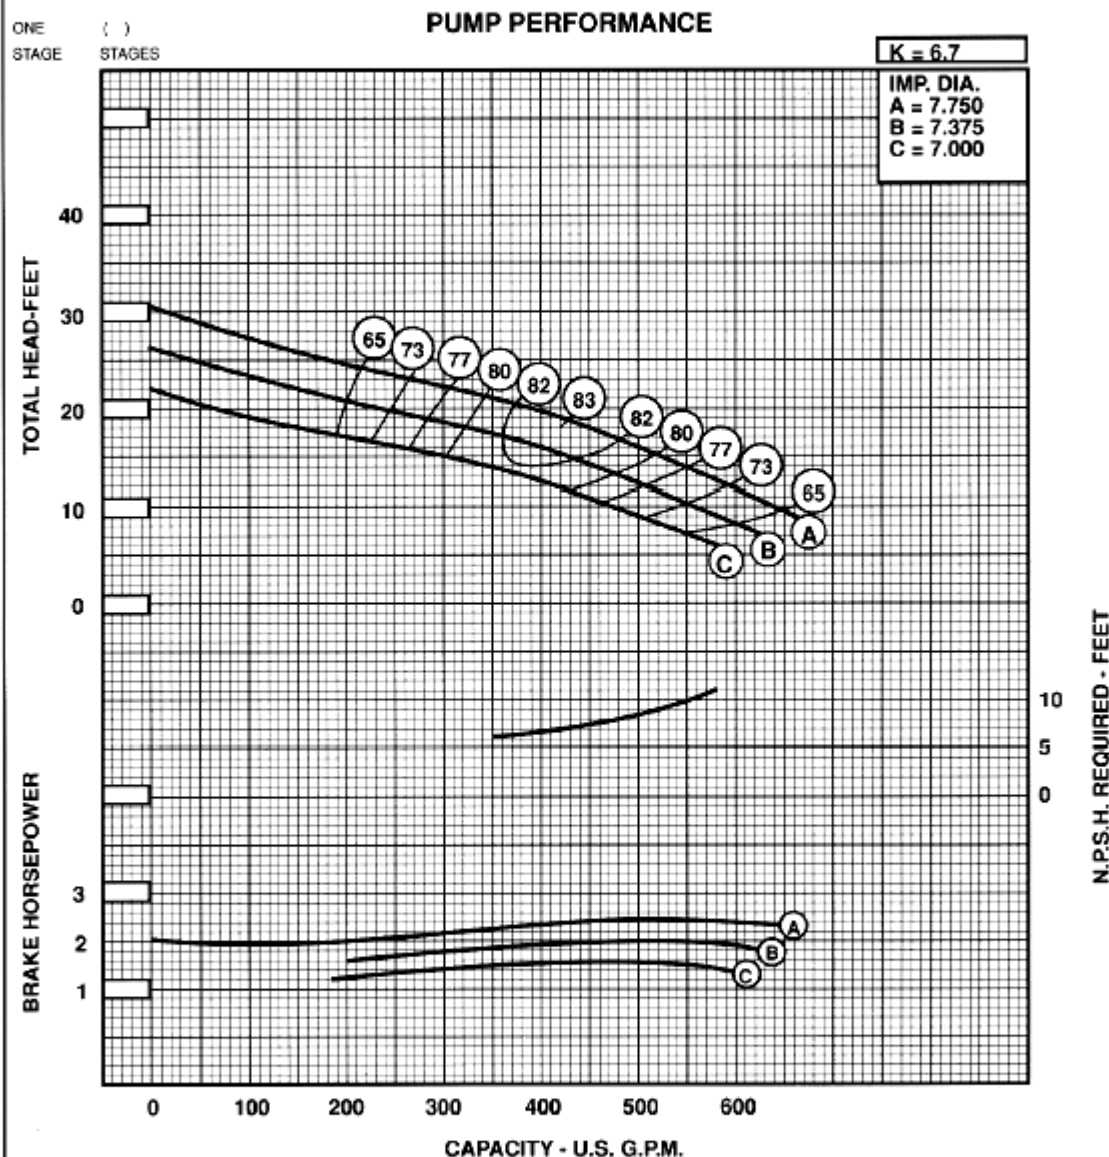

|                                       |         |                                 |       |
|---------------------------------------|---------|---------------------------------|-------|
| EYE AREA - SQ. IN.                    | = 18.1  | IMPELLER WT. - LBS.             | = 14  |
| WRP PER IMPELLER LB.-FT. <sup>2</sup> | = 0.59  | ONE STAGE WT. - LBS.            | = 280 |
| MAX. NO. STD. STAGES                  | = 10    | ADD'L STAGE WT. - LBS.          | = 80  |
| MAX. OPERATING - P.S.I.               | = 300   | DISCH. - IN.                    | = 6.8 |
| STD. LATERAL - IN.                    | = 0.375 | SUCTION - IN.                   | = 6   |
| STD. SHAFT DIA. - IN.                 | = 1.688 | BOWL CONN. FLANGED COLLET       |       |
| MAX. SHAFT DIA. - IN.                 | = —     | ADD 8.375" PER ADDITIONAL STAGE |       |
| MIN. SUBMERGENCE - IN.                | = 18    |                                 |       |

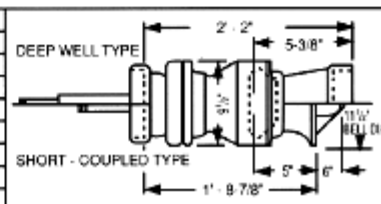

Curves reflect typical performance, refer to factory for certification.