

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-2
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-1
4	0	BOWL - NI-R.	-1


11 GHMC**1180**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

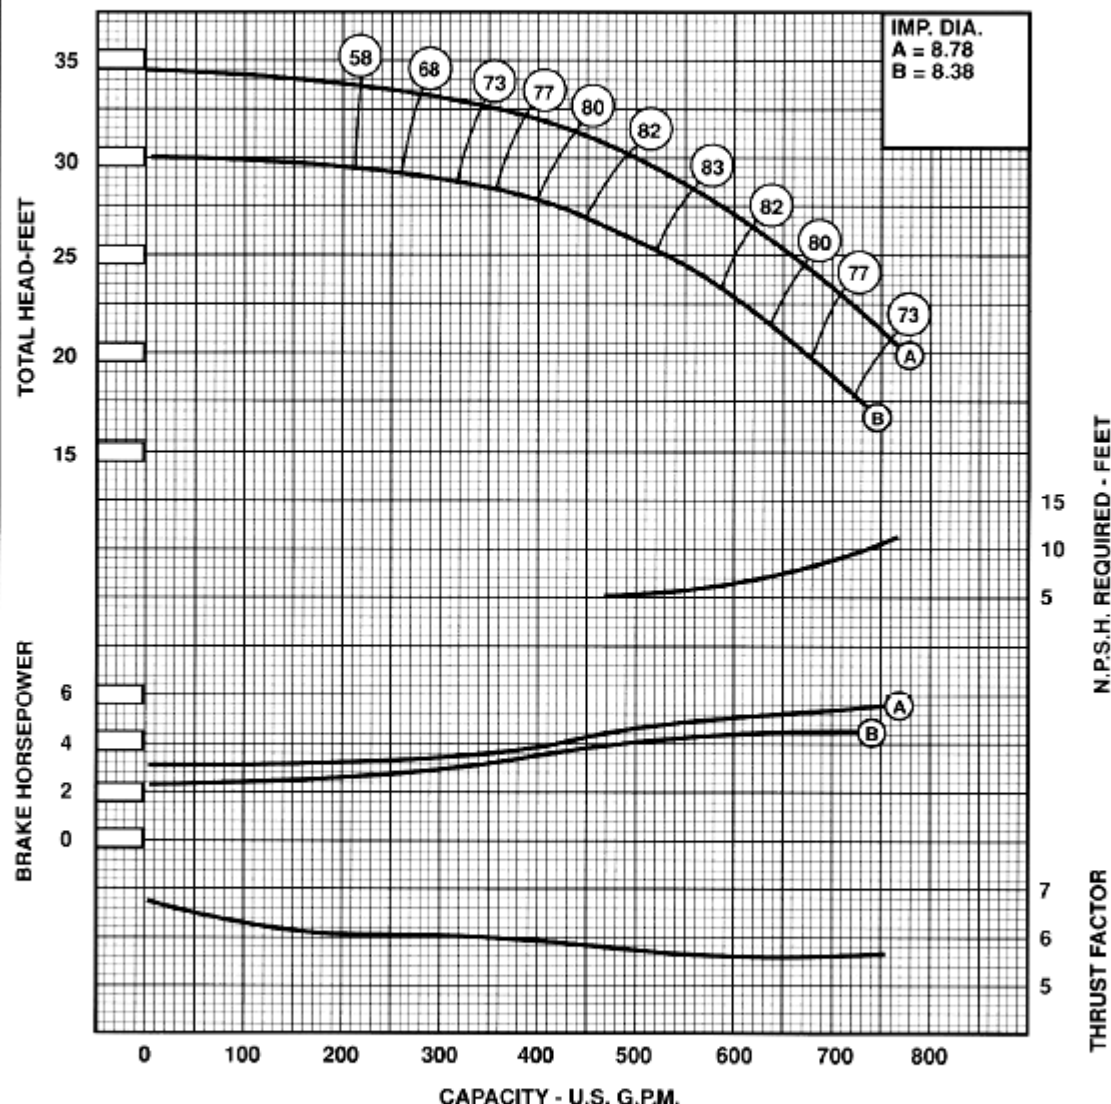ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 14.71	IMPELLER WT. - LBS.	= 12.7
WT. PER IMPELLER LB.-FT. ²	= 0.74	ONE STAGE WT. - LBS.	= 186
MAX. SPHERE SIZE	= —	ADD'L STAGE WT. - LBS.	= 74
MAX. NO. STD. STAGES	= 10	IMPELLER NUMBER	= —
MAX. OPERATING - P.S.I.	= 430	DISCH. - IN.	= 8
STD. LATERAL - IN.	= 0.56	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.500	MAX. LATERAL - IN.	= —
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. FLANGED - COLLET	= —
MIN. SUBMERGENCE - IN.	= 15	ADD 9 3/4" PER ADDITIONAL STAGE.	= —

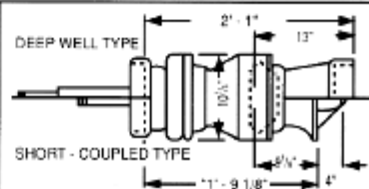

Curves reflect typical performance, refer to factory for certification