


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2


12RM**1170**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

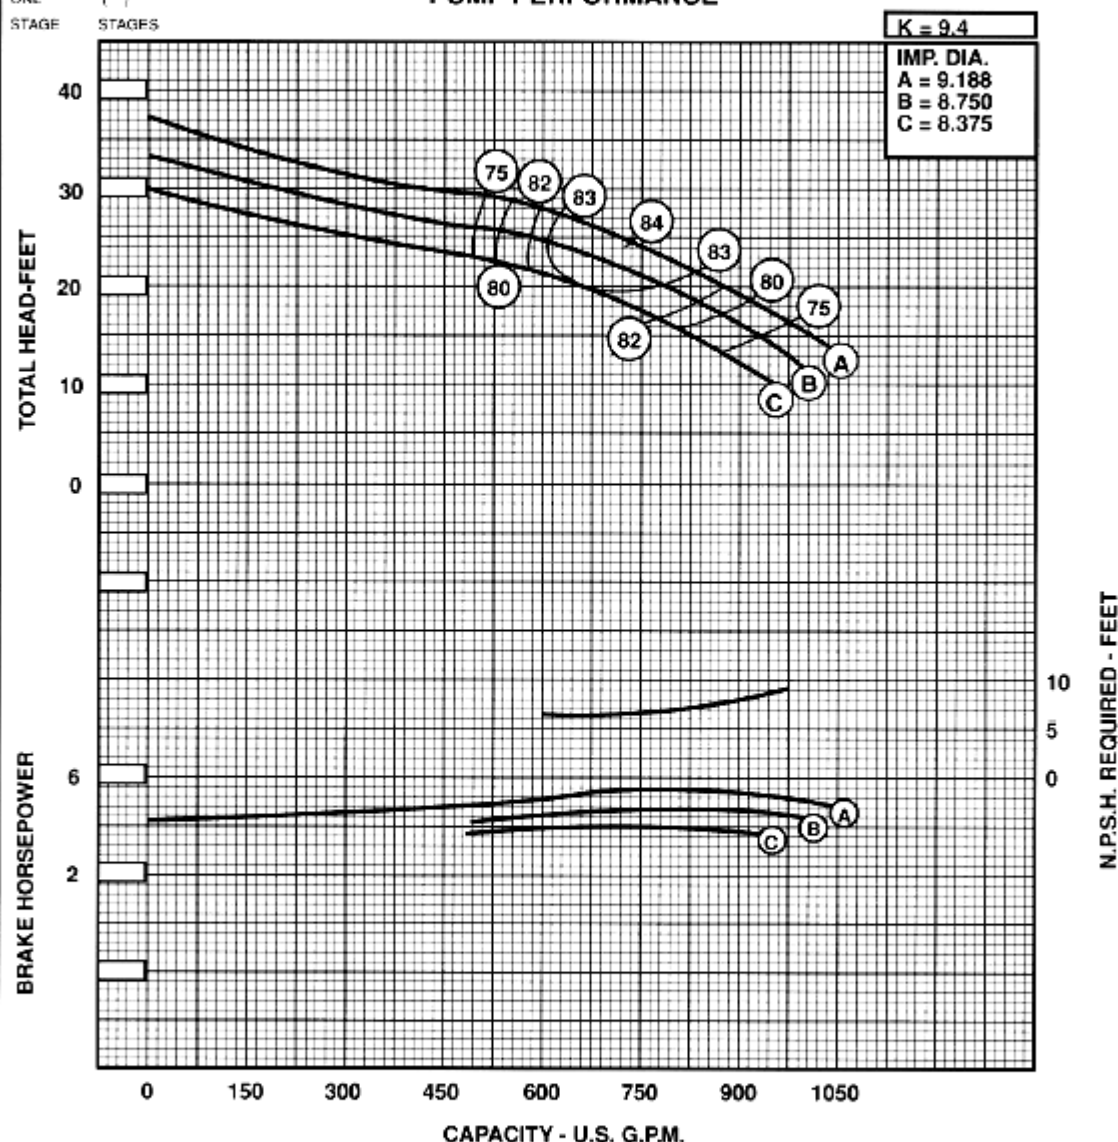ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 25.5	IMPELLER WT. - LBS.	= 16
WR. PER IMPELLER LB. - FT. ²	= 1.3	ONE STAGE WT. - LBS.	= 410
MAX. NO. STD. STAGES	= 24	ADD'L STAGE WT. - LBS.	= 116
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 8.10
STD. LATERAL - IN.	= 0.375	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.838	BOWL CONN. - FLANGED COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 10" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 17		

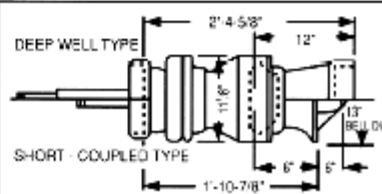

Curves reflect typical performance; refer to factory for verification.