


CURVE data**Verti-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
4		BOWL - NI-R.	-1


13 MKL**1180** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE STAGE | | STAGES

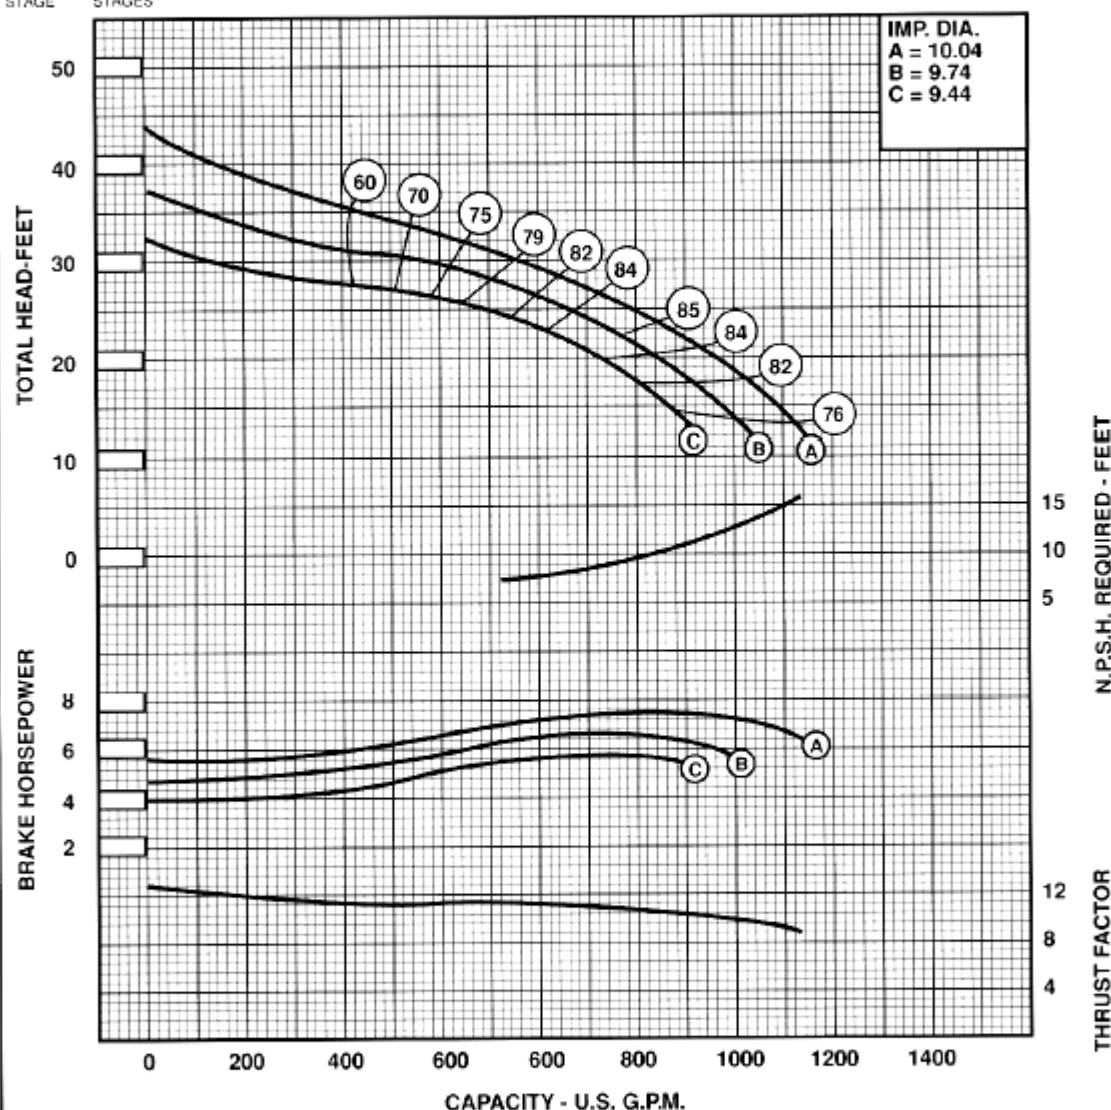PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 25.5	IMPELLER WT. - LBS.	= 17.5
WR/PER IMPELLER LB.-FT. ²	= 1.45	ONE STAGE WT. - LBS.	= 278
MAX. SPHFRF SIZE	= —	ADDL. STAGE WT. - LBS.	= 116
MAX. NO. STD. STAGES	= 15	IMPELLER NUMBER	= —
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 8.10
STD. LATERAL - IN.	= 0.64	SUCTION - IN.	= 10
STD. SHAFT DIA. - IN.	= 1.687	MAX. LATERAL - IN.	= —
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. - FLANGED - COLLET	= —
MIN. SUBMERGENCE - IN.	= 21	ADD 11.38" PER ADDITIONAL STAGE	= —

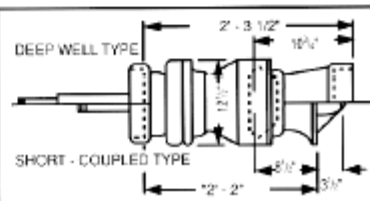

Curves reflect typical performance. refer to factory for certification.