

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.0	IMP - C.I.	-1.0
2	-1.0		
3	NO CHG.		
4	NO CHG.		


14BRM**1180 R.P.M.**

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

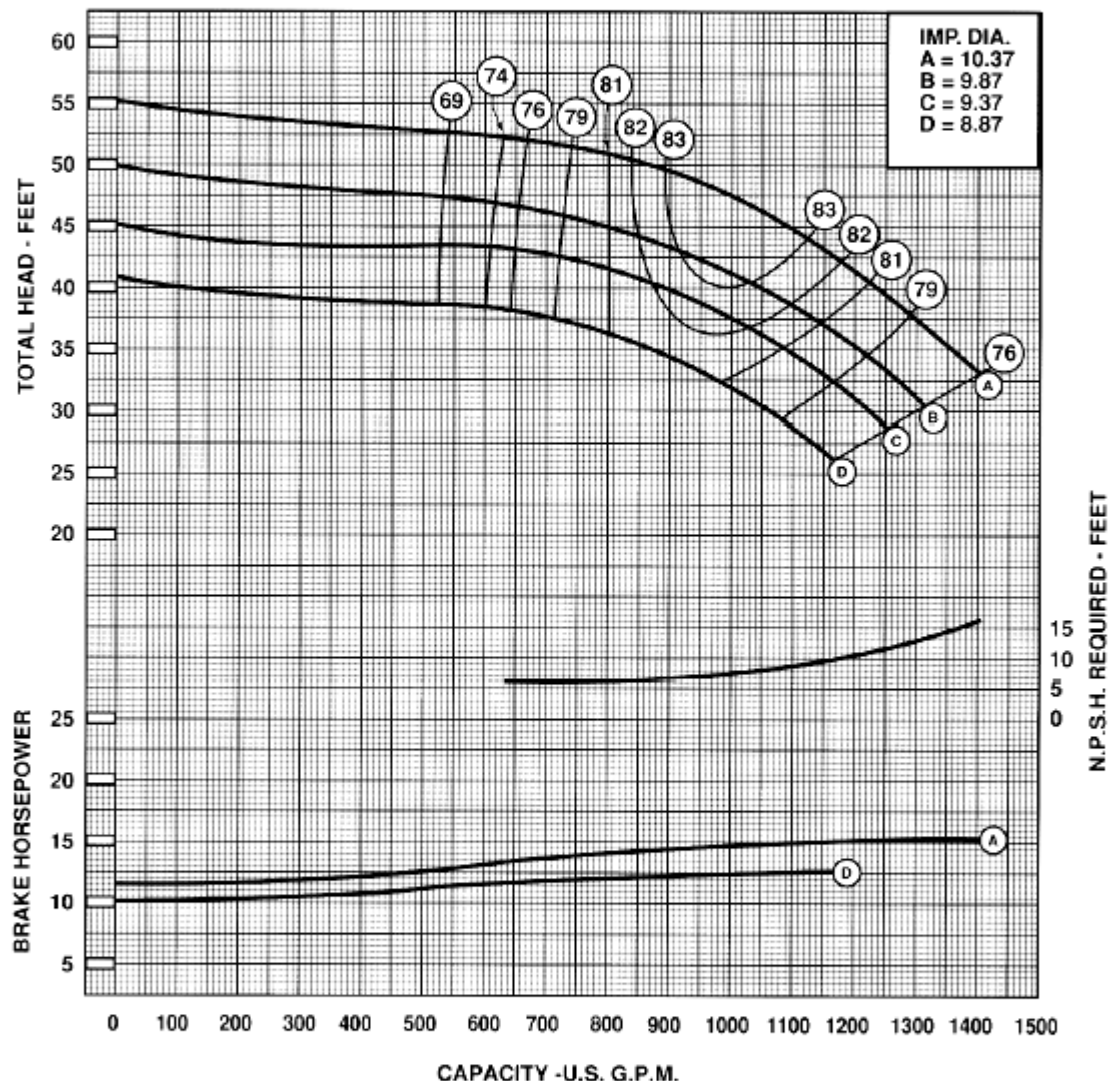PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 24.80	IMPELLER WT. - LBS.	= 37.50
WT. PER IMPELLER LB. FT. ²	= 3.55	ONE STAGE WT. - LBS.	= 376
MAX. GPM/CIC GIZL	= 11N	ADD'L STAGE WT. - LBS.	= 130
MAX. NO. STD. STAGES	= 16	IMPELLER NUMBER	= T7FA92
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	= 10
STD. LATERAL - IN.	= 33	SUCTION - IN.	= 10
STD. SHAFT DIA. - IN.	= 1-15/16	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL / IMP. CONN.	=
MIN. SUBMERGENCE - IN.	= 36	ADD 12-1/64" PER ADDITIONAL STAGE.	

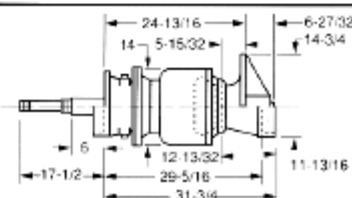

Curves reflect typical performance; refer to factory for certification.