

CURVE data**Verli-Line**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2

14RH**1170** R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE****K = 15.5**

IMP. DIA.
A = 11.500
B = 10.875
C = 10.375

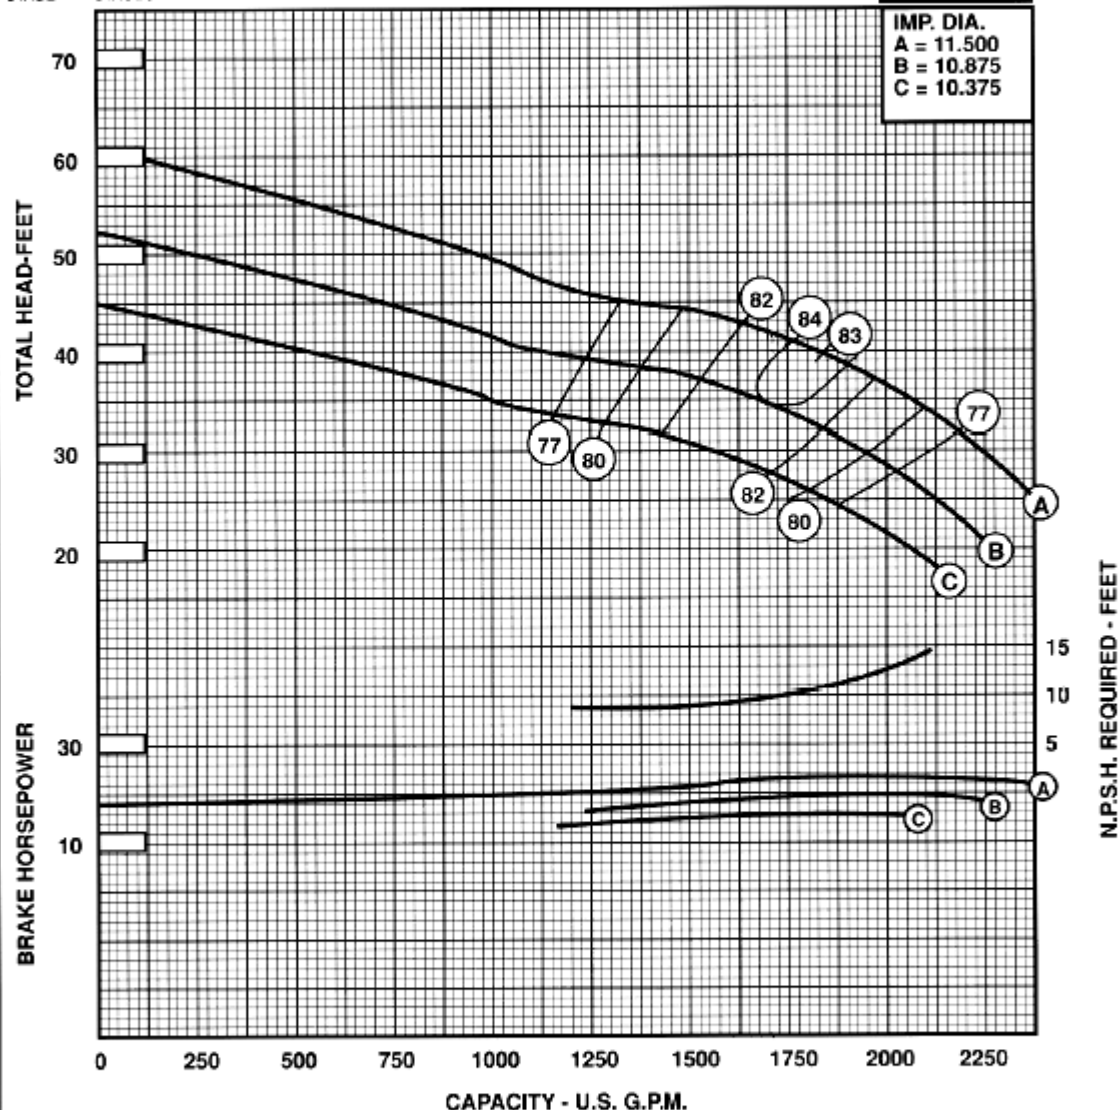

EYE AREA - SQ. IN.	= 41.2	IMPELLER WT. - LBS.	= 26
WR. PER IMPELLER LB.-FT. ²	= 4.15	ONE STAGE WT. - LBS.	= 700
MAX. NO. STD. STAGES	= 14	ADD'L STAGE WT. - LBS.	= 285
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 12
STD. LATERAL - IN.	= 0.700	SUCTION - IN.	= 10
STD. SHAFT DIA. - IN.	= 2.188	BOWL CONN. FLANGED-COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 13.375" PER ADDITIONAL STAGE	
MIN. SUBMERGENCE - IN.	= 26		

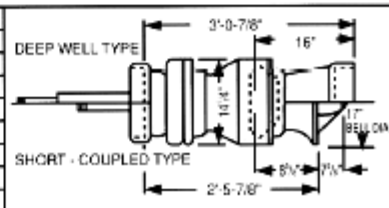

Curves reflect typical performance. refer to factory for certification.