

CURVE data**Verli-Line**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP. C.I.	-1
2	-2	IMP. NI-RI	-1
3	-1	BOWL BRZ.	-2
4	0	BOWL - NI-RI	-2


14RL**1170**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSEPOWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE**PUMP PERFORMANCE****K = 15.5**

IMP. DIA.
A = 11.500
B = 10.875
C = 10.375

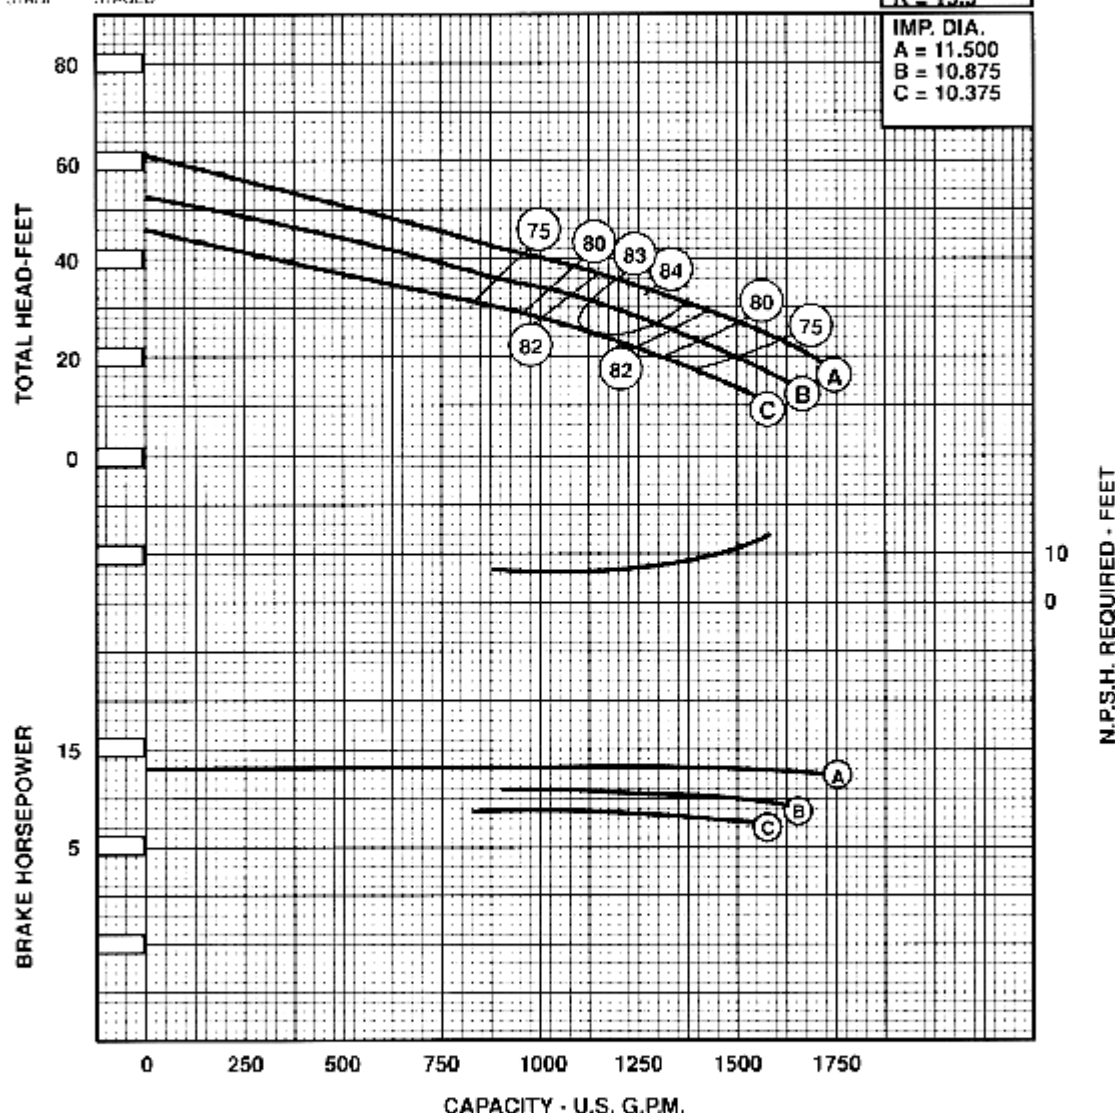

EYE AREA - SQ. IN.	41.2	IMPELLER WT. - LBS.	26
WPK PER IMPELLER LB.-FT.	4.15	ONE STAGE WT. - LBS.	700
MAX NO. STD. STAGES	14	ADD'L STAGE WT. - LBS.	265
MAX OPERATING - PSI	400	DISCH. - IN.	12
STD. LATERAL - IN.	6.700	SUCTION - IN.	10
STD. SHAFT DIA. - IN.	2.188	BOWL CONN. - FLANGED COLLE	
MAX SHAFT DIA. - IN.	—	ADD 13.375" H-PH ADDITIONAL STAGE	
MIN. SUBMERGENCE - IN.	22		

