

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2

14RM**1170**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

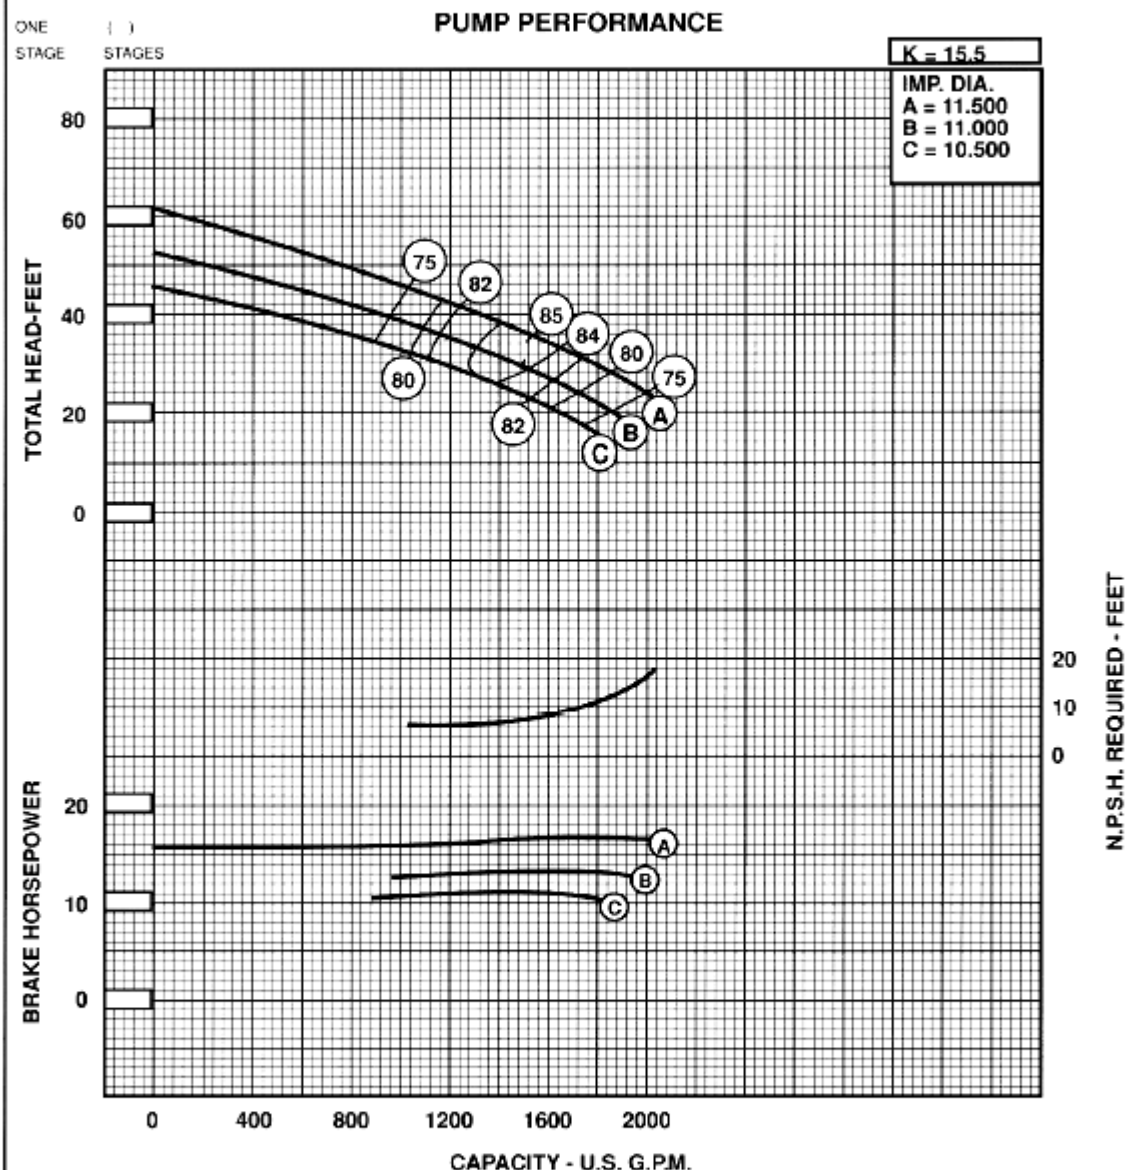

EYE AREA - SQ. IN.	= 41.2
WR' PER IMPELLER LB.-FT. ²	= 4.15
MAX. NO. STD. STAGES	= 14
MAX. OPERATING - P.S.I.	= 400
STD. LATERAL - IN.	= 0.700
STD. SHAFT DIA. - IN.	= 2.188
MAX. SHAFT DIA. - IN.	= —
MIN. SURMERGENCE - IN.	= 24

IMPELLER WT. - LBS.	= 26
ONE STAGE WT. - LBS.	= 700
ADD'L STAGE WT. - LBS.	= 206
DISCH. - IN.	= 12
SUCTION - IN.	= 10
BOWL CONN.	FLANGED-COLLET
ADD 13.375" PER ADDITIONAL STAGE.	

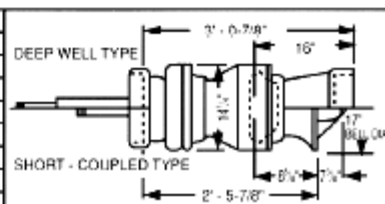

Curves reflect typical performance; refer to factory for certification.