


CURVE data

Veri-Line®


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ	-2
4	0	BOWL - NI-R	-2

16FHH**1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

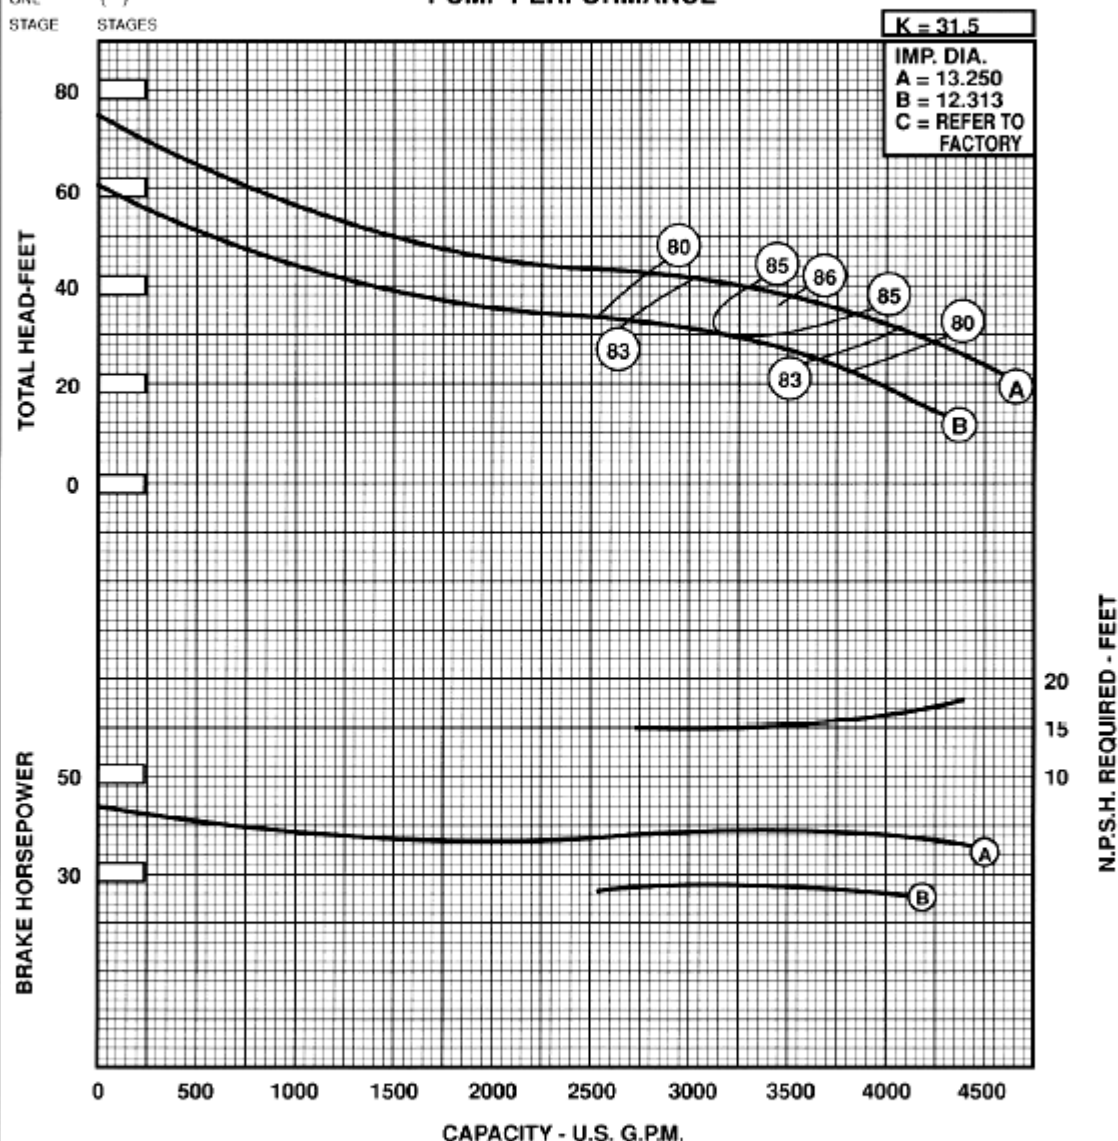ONE
STAGE{ }
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 78.0	IMPELLER WT. - LBS.	= 36
WPI PER IMPELLER LB.-FT. ²	= 6.36	ONE STAGE WT. - LBS.	= 650
MAX NO. STD. STAGES	= 12	ADDL STAGE WT. - LBS.	= 210
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 12, 14
STD. LATERAL - IN.	= 0.560	SUCTION - IN.	= BELL
STD. SHAFT DIA. - IN.	= 2.188	BOWL CONN. FLANGED-COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 14.5" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 37		

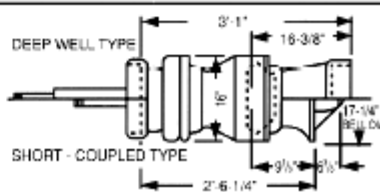

Curves reflect typical performance, refer to factory for certification