

CURVE data

Veri-Line

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3		BOWL - BRZ.	-1
4		BOWL - NI-R.	-1


19AWH**1180**

R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE

1 1
STAGES

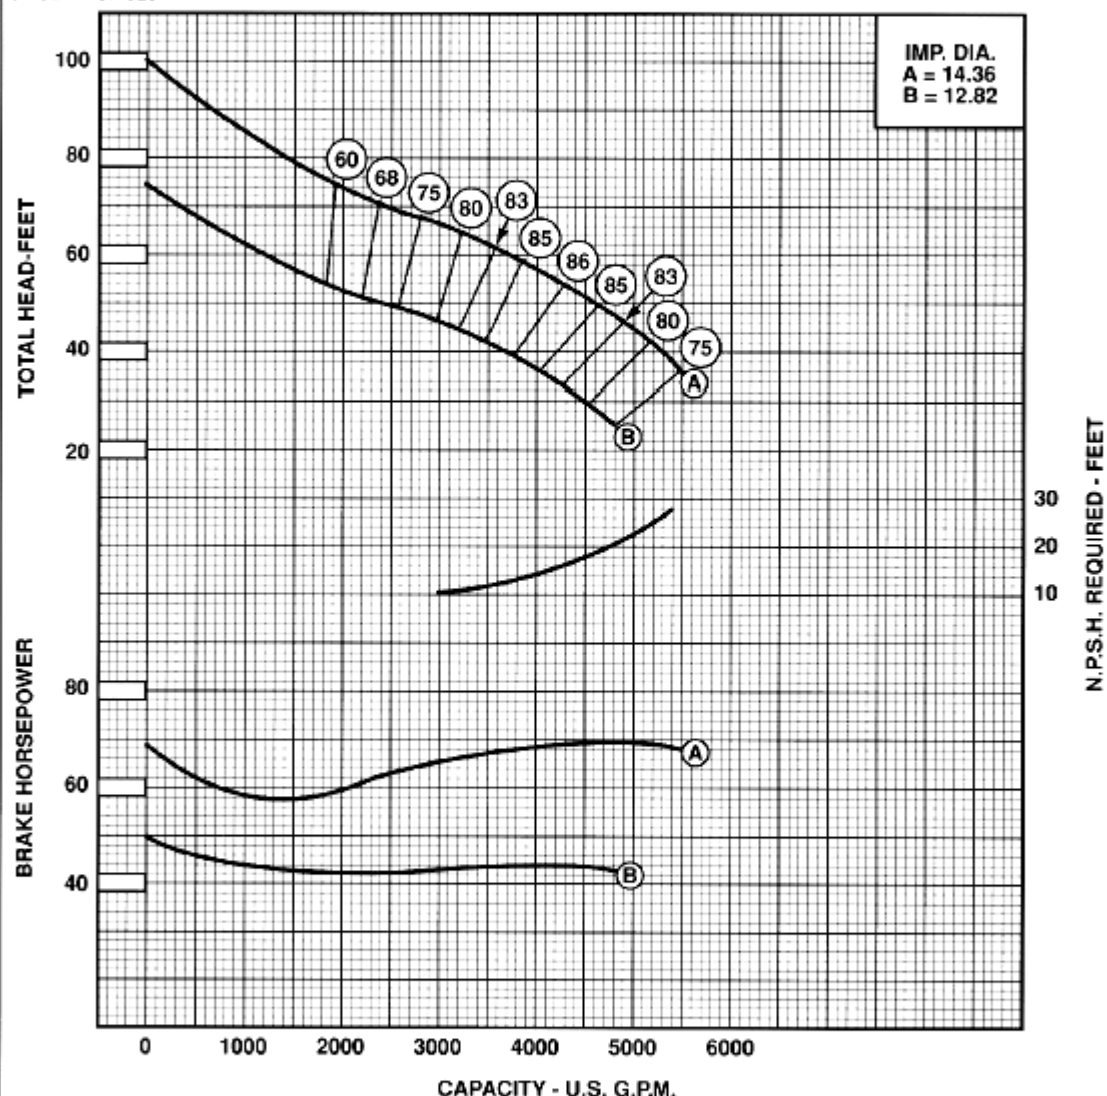PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 69.5	IMPELLER WT. - LBS.	= 58
WPI PER IMPELLER LB.-FT.	= 7.45	ONE STAGE WT. - LBS.	= 610
MAX. SPHERE SIZE	= -----	ADDL. STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 6	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 14, 16
STD. LATERAL - IN.	= 0.62	SUCTION - IN. (BELL)	= 17-1/2" OR 22-1/2"
STD. SHAFT DIA. - IN.	= 2.167	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. - FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 32	ADD 17-5/8" PER ADDITIONAL STAGE.	

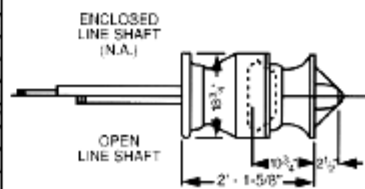

V.L.118019AWH1110