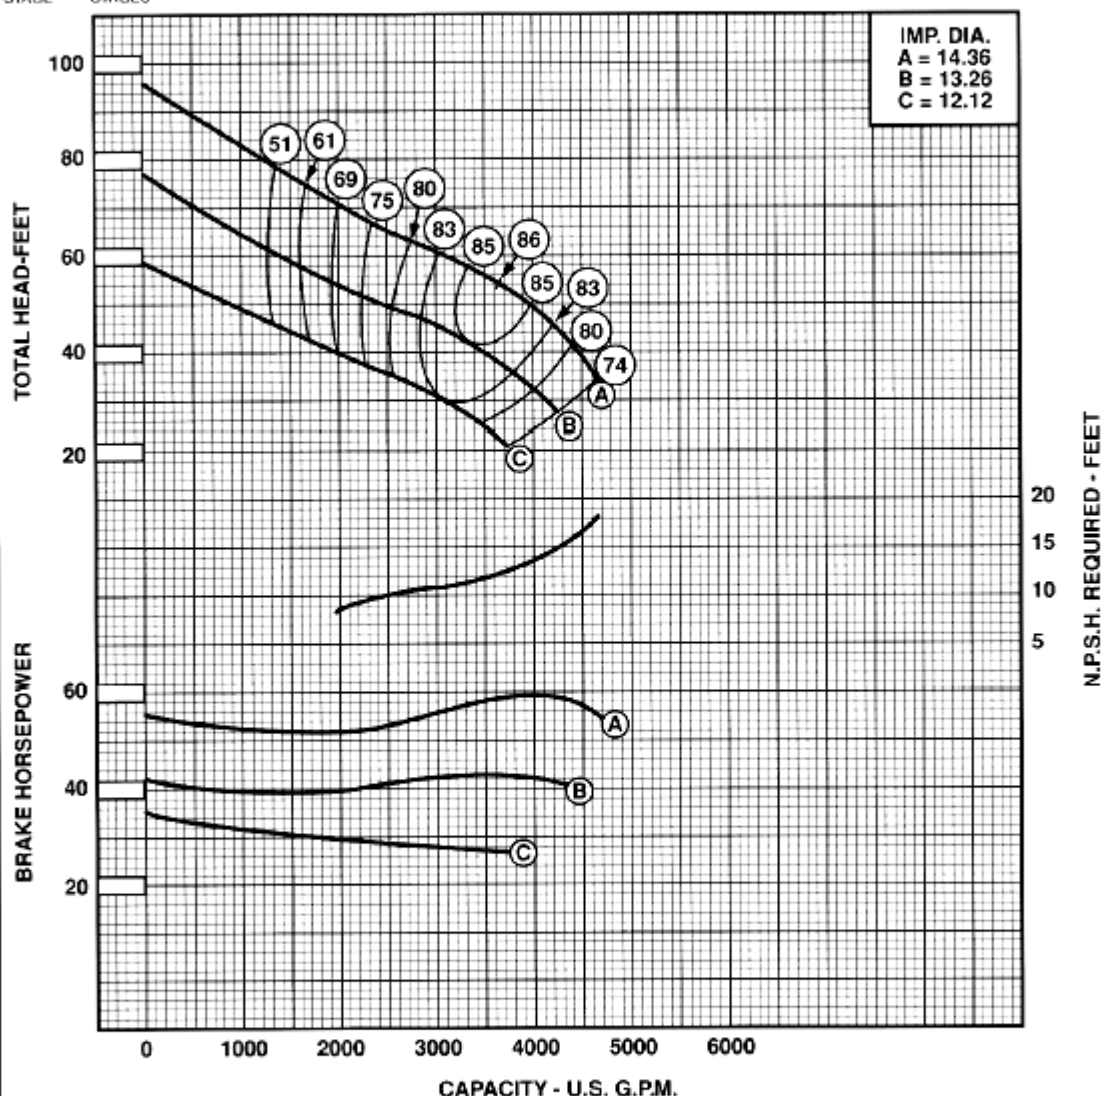


CURVE data**Verli-Line**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	0	IMP. - C.I.	-1
2		IMP. - NI-RI	-1
3		BOWL - BRZ.	-1
4		BOWL - NI-R.	-1

19AWM**1180** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 1 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 1 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 69.5	IMPELLER WT. - LBS.	= 58
WPI PER IMPELLER LB.-FT. ²	= 7.45	ONE STAGE WT. - LBS.	= 610
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 14, 16
STD. LATERAL - IN.	= 0.62	SUCTION - IN. (BELL)	= 17-1/2" OR 22-1/2"
STD. SHAFT DIA. - IN.	= 2.188	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	= -----
MIN. SUBMERGENCE - IN.	= 32	ADD 17.5/8" PER ADDITIONAL STAGE.	= -----

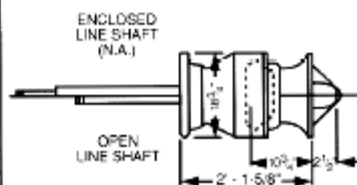

Curves reflect typical performance. refer to factory for certification.