


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
		BOWL - NI-R.	-2


20EHL**1170**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

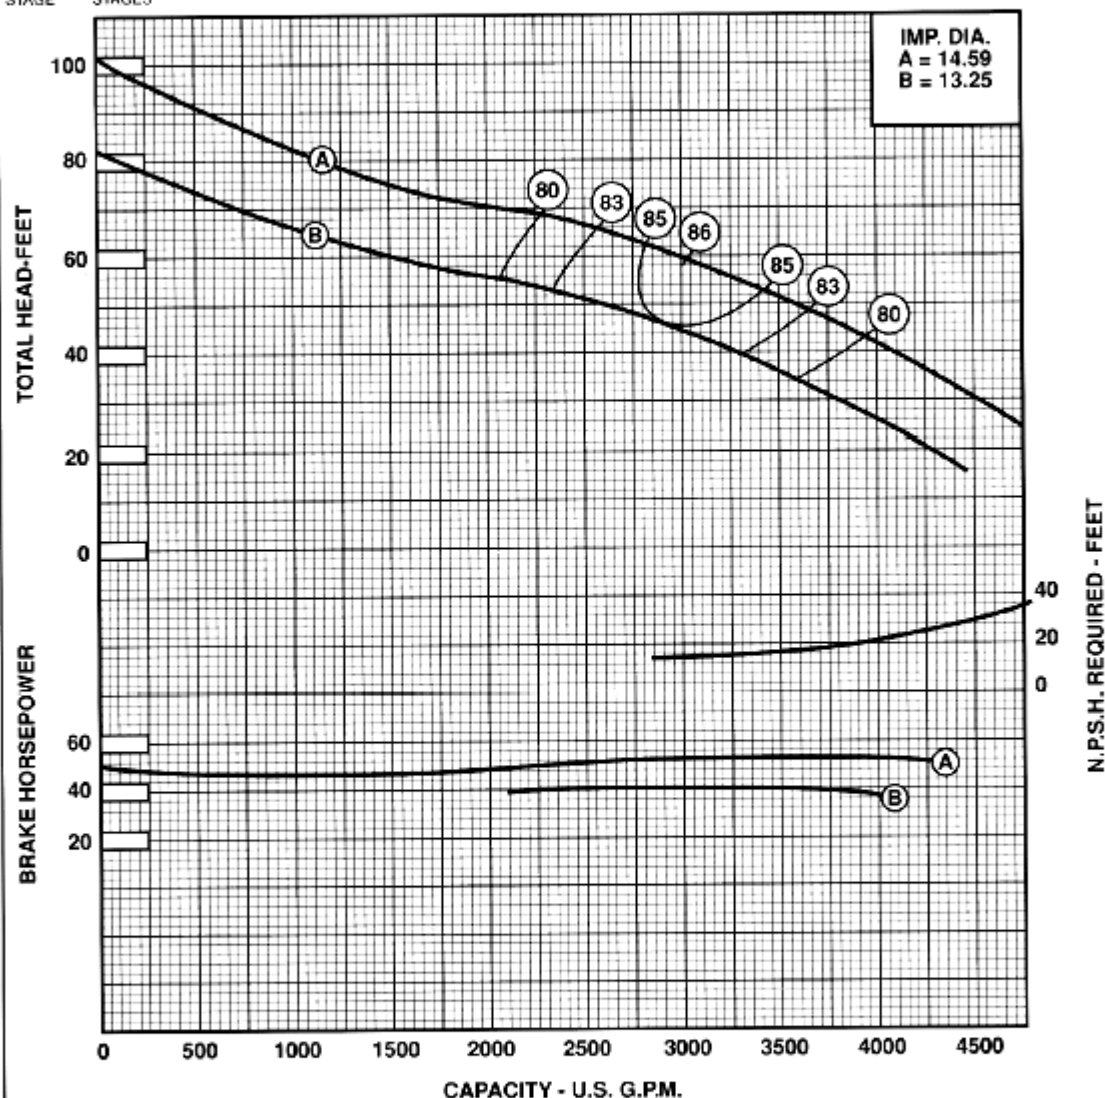ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 61.2	IMPELLER WT. - LBS.	= 89
WR' PER IMPELLER LB.-FT. ²	= 10.94	ONE STAGE WT. - LBS.	= 920
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 425
MAX NO. STD. STAGES	= 7	IMPELLER NUMBER	= -----
MAX OPERATING - P.S.I.	= 200	DISCH. - IN.	= 16 OD
STD. LATERAL - IN.	= 560	SUCTION - IN.	= 14 OD
STD. SHAFT DIA. - IN.	= 2-7/16	MAX LATERAL - IN.	= -----
MAX SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COUPLER	
MIN SUBMERGENCE - IN.	= 33	ADD 15" PER ADDITIONAL STAGE	

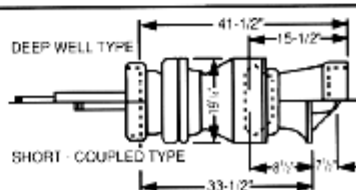

VLI17002EHL 1110