

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-2
2	-3	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-1
5	1	BOWL - NI-R	-2


20EHM**1170**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 6 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 8 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

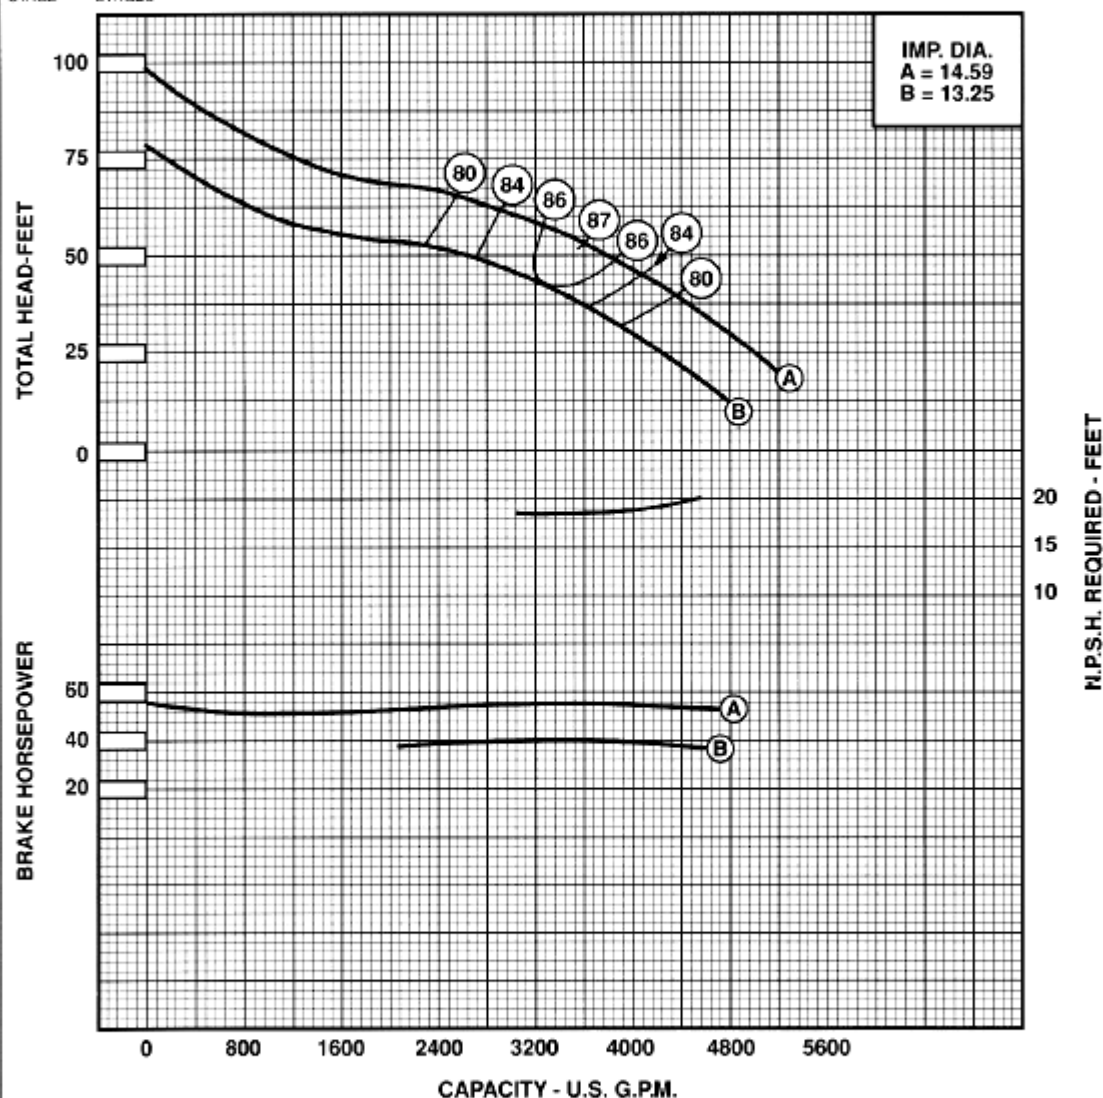ONE
STAGE()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 61.2	IMPELLER WT. - LBS.	= 136
WR² PER IMPELLER LB.-FT²	= 10.94	ONE STAGE WT. - LBS.	= 920
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 425
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 290	DISCH. - IN.	= 16 OD
STD. LATERAL - IN.	= 560	SUCTION - IN.	= 14 OD
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 33	ADD 15" PER ADDITIONAL STAGE	

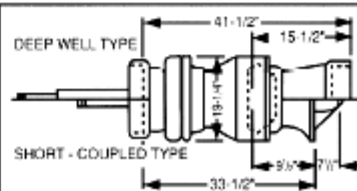

Curves reflect typical performance, refer to factory for certification.

VL117020EHM1110