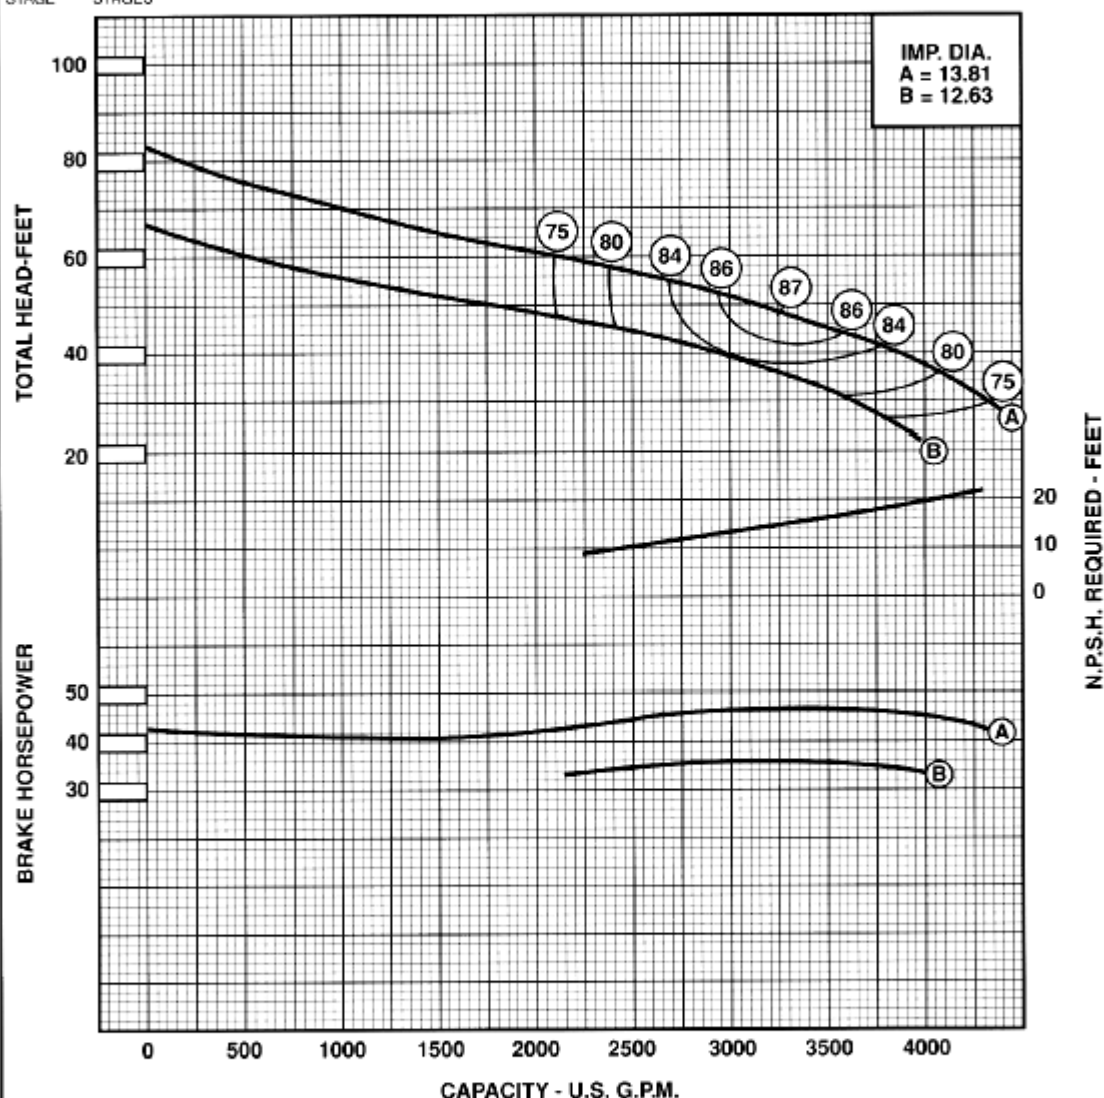


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
4		BOWL - NI-R.	-2


20KL**1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 71.3	IMPELLER WT. - LBS.	= 117
WR PER IMPELLER LB.-FT. ²	= 12.23	ONE STAGE WT. - LBS.	= 1000
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 510
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 16 OD
STD. LATERAL - IN.	= .560	SUCTION - IN.	= 20-7/8" BELL
STD. SHAFT DIA. - IN.	= 2-7/16"	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 33	ADD 18-1/4" PER ADDITIONAL STAGE.	

DEEP WELL TYPE

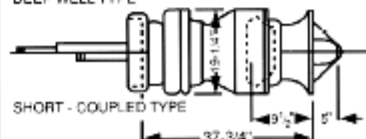

VL117020KL1110

Curves reflect typical performance. refer to factory for certification.