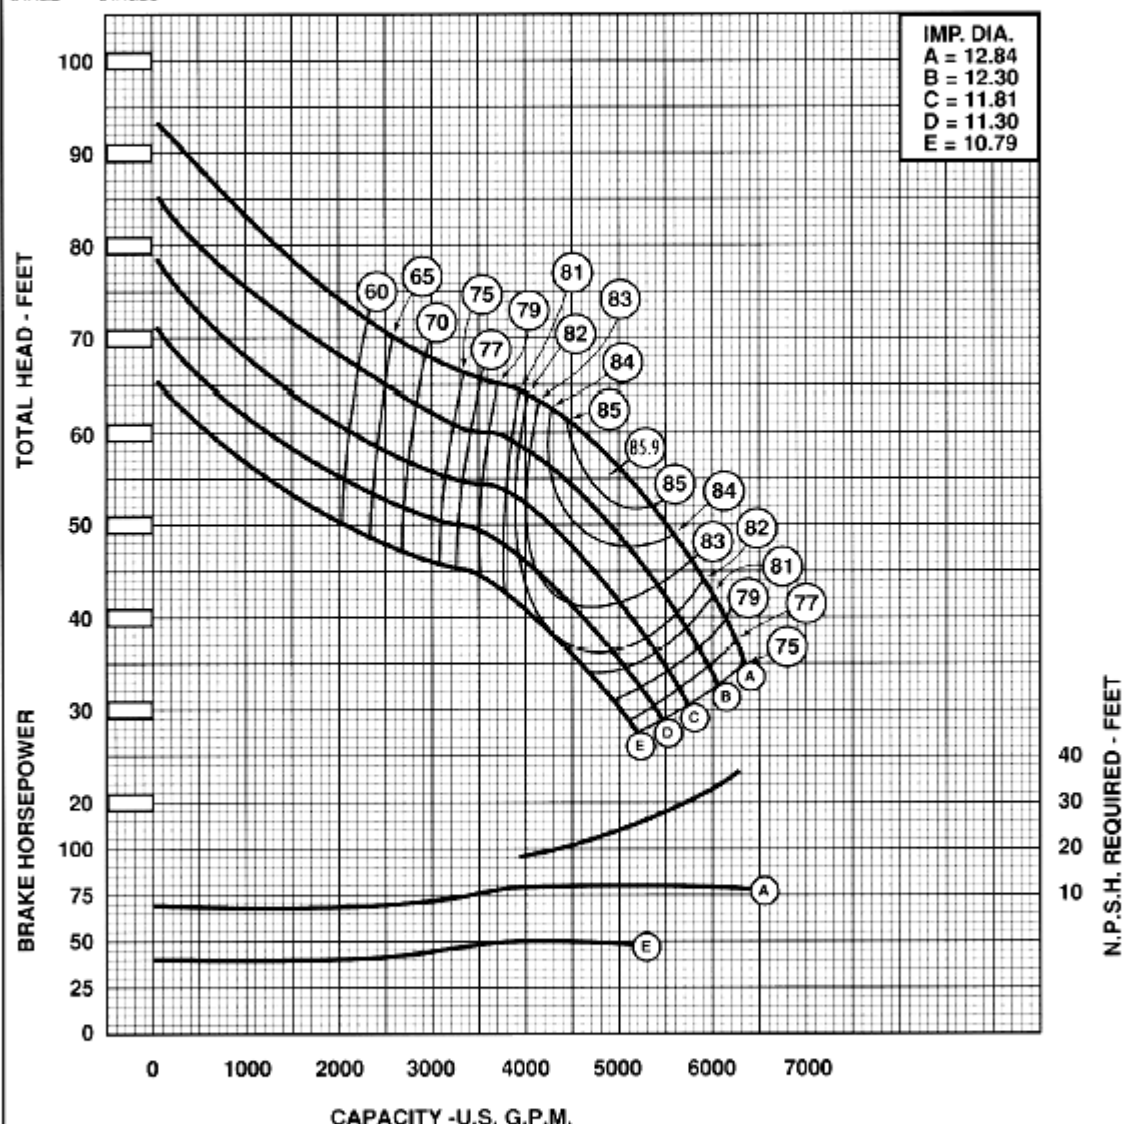


Verli-Line®


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP. - C.I.	-2.0
2	-1.5		
3	-0.5		
4	NO CHG.		

21BRH**1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

PVF AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 88
WH/ PER IMPELLER LB. FT. ²	= 16.93	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= 1.62	ADD'L STAGE WT. - LBS.	= 435
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= T7LKB99
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	= 16
STD. LATERAL - IN.	= .94	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= 94
MAX. SHAFT DIA. - IN.	=	BOWL / IMP. CONN.	
MIN. SUBMERGENCE - IN.	= 31	ADD 19-1/8" PER ADDITIONAL STAGE.	

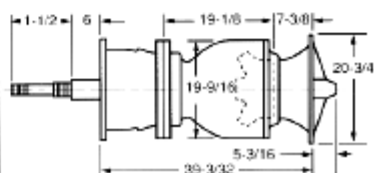

Curves reflect typical performance; refer to factory for certification


CURVE data

Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP. - C.I.	-2.0
2	-1.5	IMP. - NI-RI	
3	-0.5	BOWL - BRZ.	
4	NO CHG.	BOWL - NI-RI	


21BRH***1170**
R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

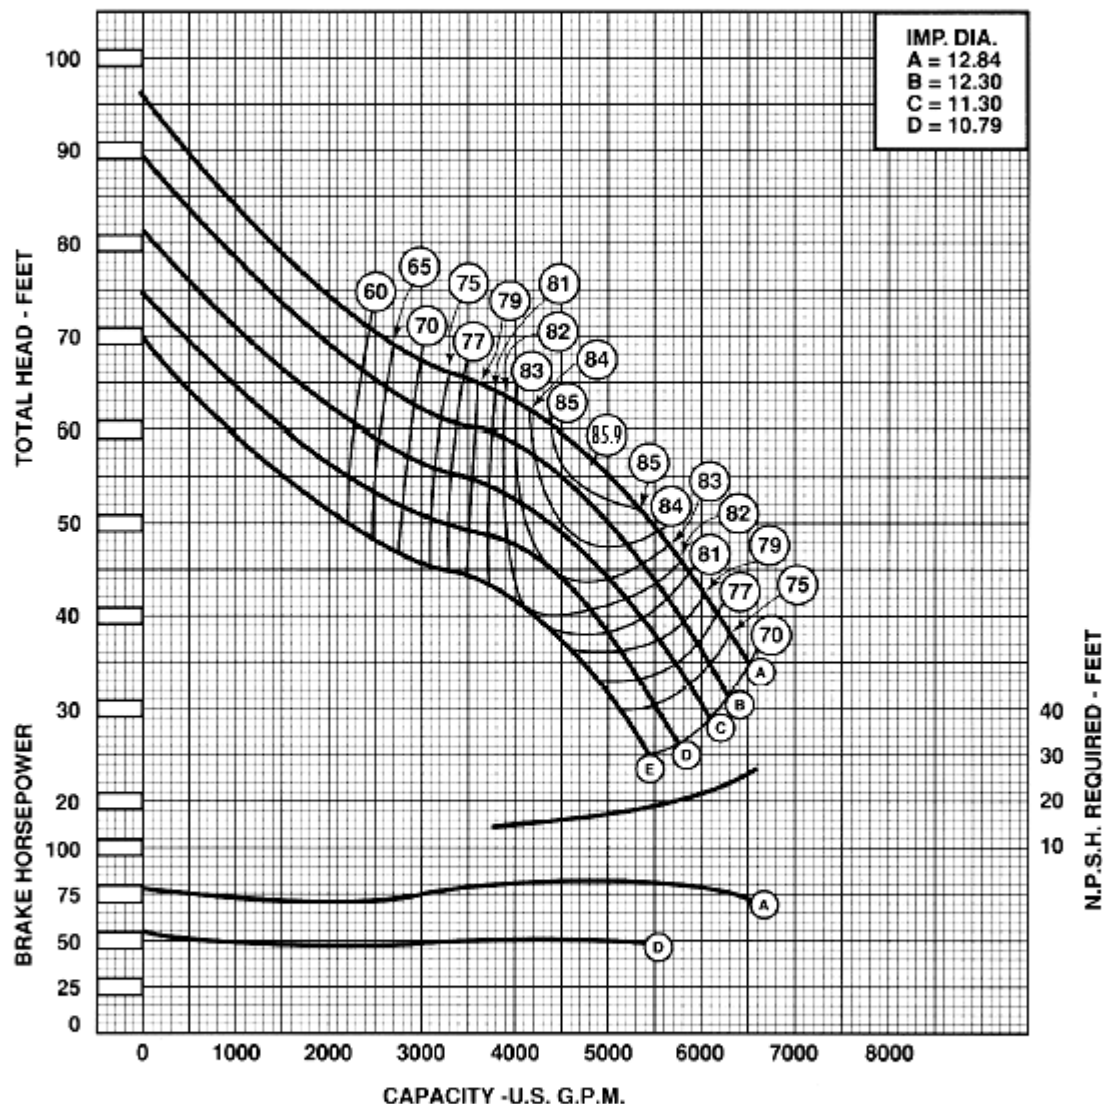ONE ()
STAGE STAGES**PUMP PERFORMANCE**

* SPECIAL FILING REQUIRED.

EYE AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 89
WT. PER IMPELLER LB.-FT. ³	= 16.93	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= 1.62 IN.	ADD'L STAGE WT. - LBS.	= 475
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= T7LKB89
MAX. OPERATING - P.S.I.	= -----	DISCH. - IN.	= 15
STD. LATERAL - IN.	= 84	SUCTION - IN.	= -----
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL / IMP. CONN.	= -----
MIN. SUBMERGENCE - IN.	= 31	ADD 19-1/8" PER ADDITIONAL STAGE	

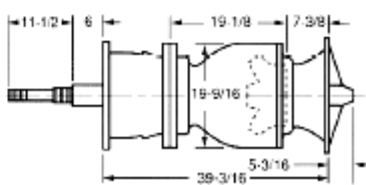

Curves reflect typical performance, refer to factory for certification.