

CURVE data

Verti-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1		IMP. = C.I.	
2		IMP. = NI-RI	
3		BOWL = BRZ.	
4		BOWL = N.I.R.	

22 AWH


1180

- RPM


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.



PUMP PERFORMANCE

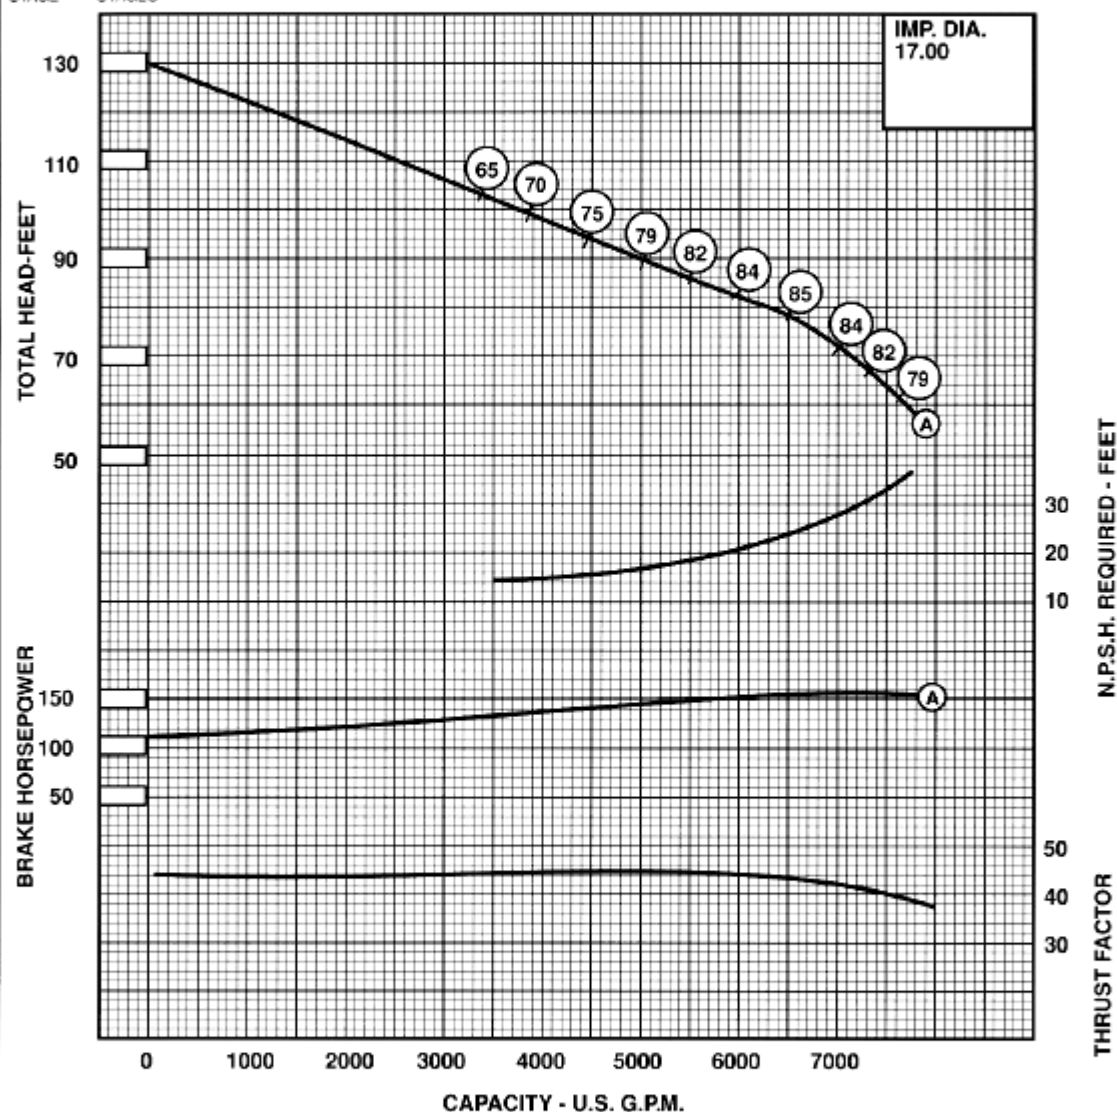

EYE AREA - SQ. IN.	= 91.44	IMPELLER WT. - LBS.	= 95
WR. PER IMPELLER LB.-FT. ²	= 22	ONE STAGE WT. - LBS.	= 1200
MAX NO. STD. STAGES	= 6	ADD'L STAGE WT. - LBS.	= 550
MAX OPERATING - P.S.I.	= 350	DISCH. - IN.	= 16
STD. LATERAL - IN.	= 0.56	SUCTION - IN.	= 22 1/2 BELL
STD. SHAFT DIA. - IN.	= 2.68 ⁷	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 30	ADD 20 1/2" PER ADDITIONAL STAGE.	

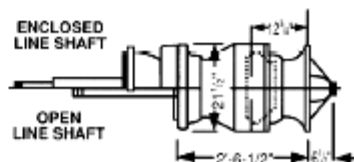

Curves reflect typical performance, refer to factory for certification