

CURVE data**Verti-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	0	IMP. - C.I.	
2	0	IMP. - NI-RI	
3		BOWL - BRZ.	
4		BOWL - NI-R.	

22 AWM**1180**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.


ONE ()
STAGE STAGES

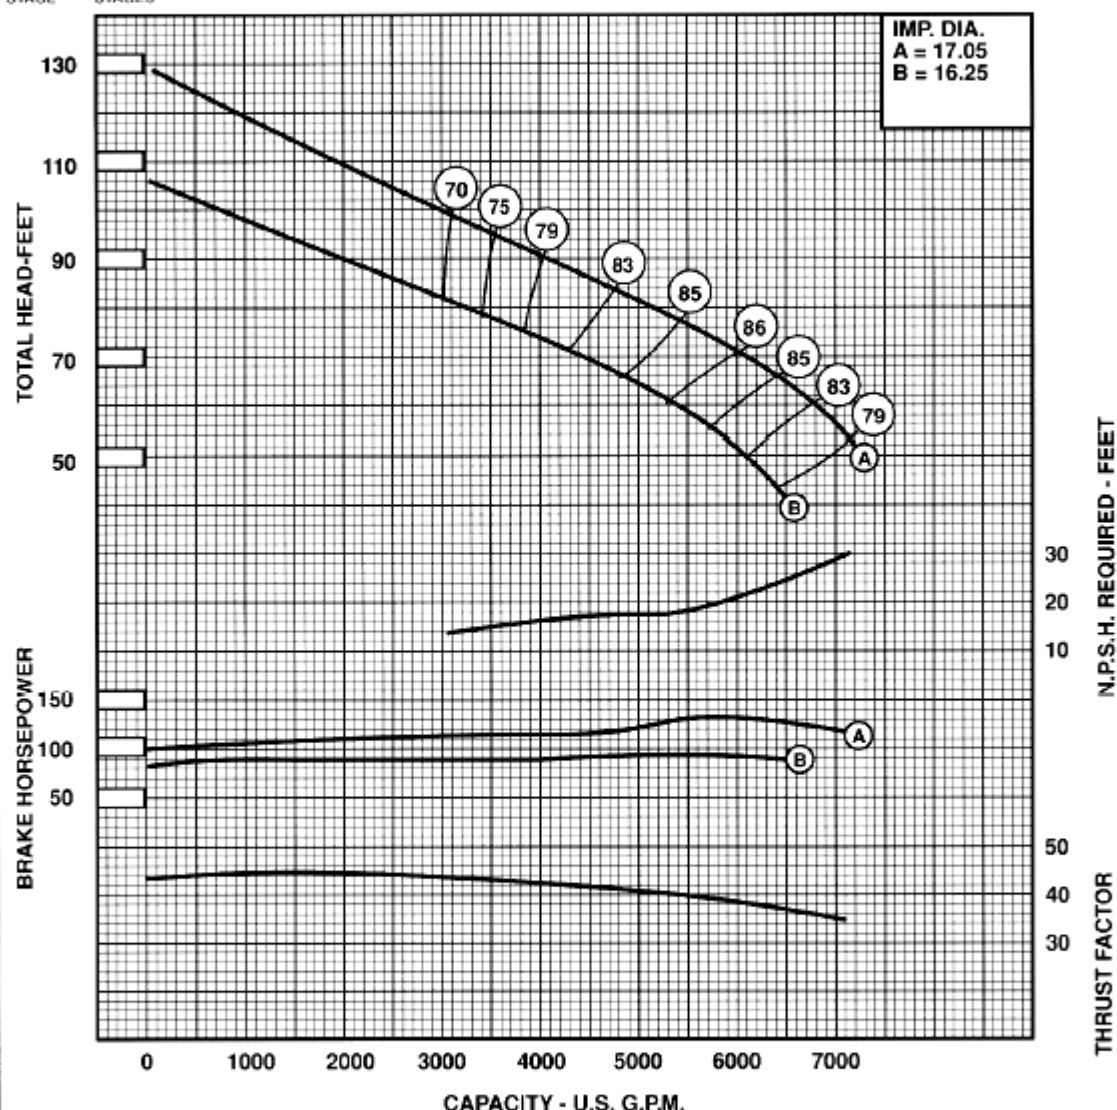PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 91.44	IMPELLER WT. - LBS.	= 95
WPI PER IMPELLER LB.-FT. ²	= 22	ONE STAGE WT. - LBS.	= 1200
MAX. NO. STD. STAGES	= 6	ADDL. STAGE WT. - LBS.	= 550
MAX. OPERATING P.S.I.	= 350	DISCH. - IN.	= 16
STD. LATERAL - IN.	= 0.56	SUCTION - IN.	= 22 1/2 BELL
STD. SHAFT DIA. - IN.	= 2.687	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 30	ADD 20 1/2" PER ADDITIONAL STAGE.	

ENCLOSED
LINE SHAFT

OPEN
LINE SHAFT



Curves reflect typical performance. refer to factory for certification.