


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
		BOWL - NI-R.	-2


22EHH**1170**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

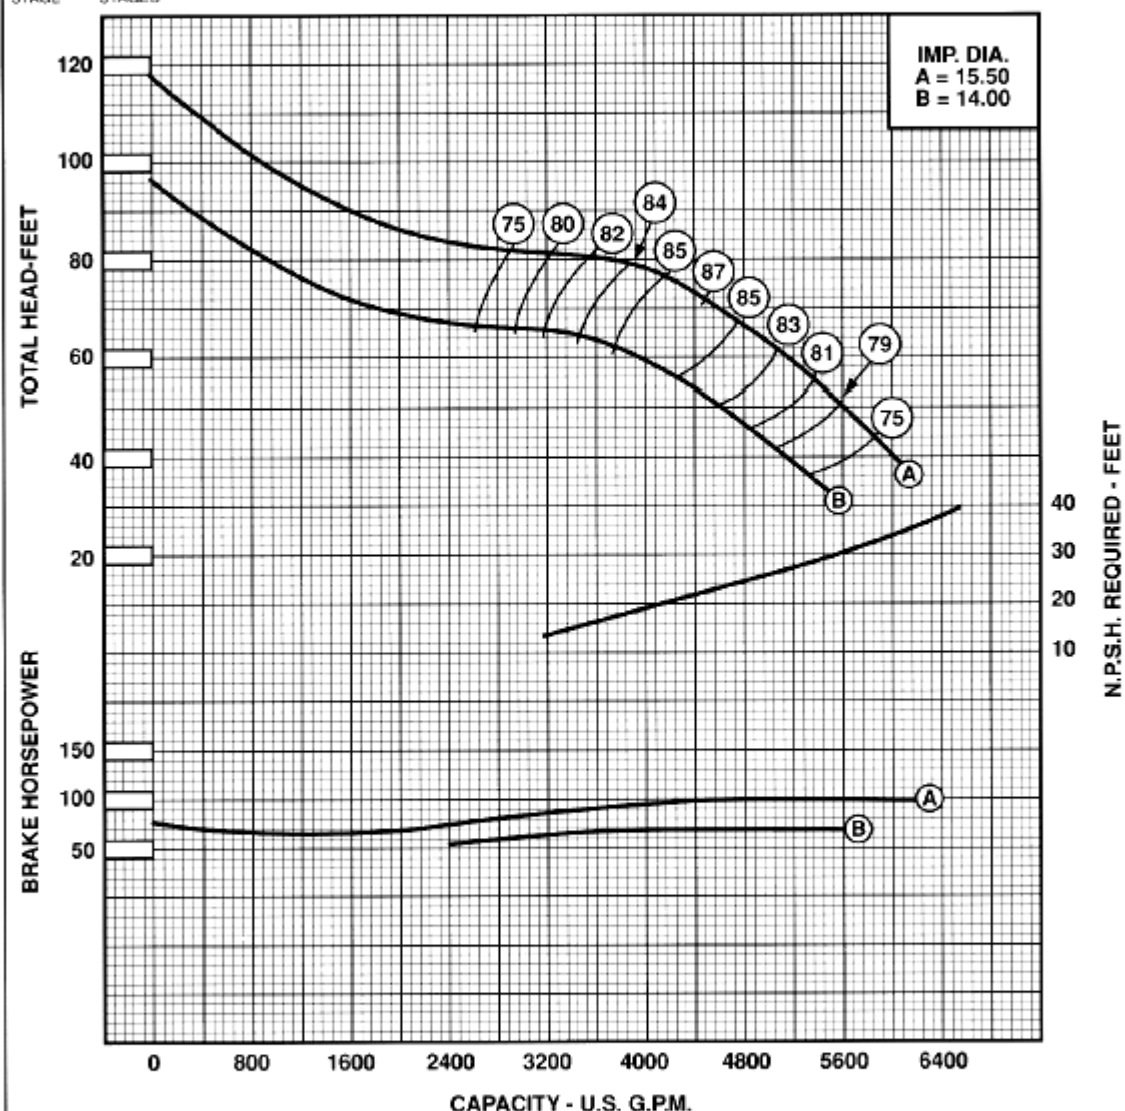ONE
STAGE**PUMP PERFORMANCE**

CYC/AREA - SQ. IN.	= 68.02	IMPELLER WT. - LBS.	= 1.18
WR/PER IMPELLER LB.-FT. ²	= 11.7	ONE STAGE WT. - LBS.	= 1000
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 570
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 16.00
STD. LATERAL - IN.	= .560	SUCTION - IN.	= 20-7/8 BELL
STD. SHAFT DIA. - IN.	= 2-11/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BCWL CONN. - FLANGED - COLLET	= -----
MIN. SUBMERGENCE - IN.	= 37	ADD 16" PER ADDITIONAL STAGE.	= -----

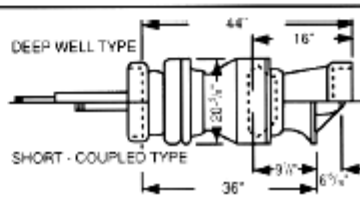

VL17022EHH1110

Curves reflect typical performance. refer to factory for certification.