

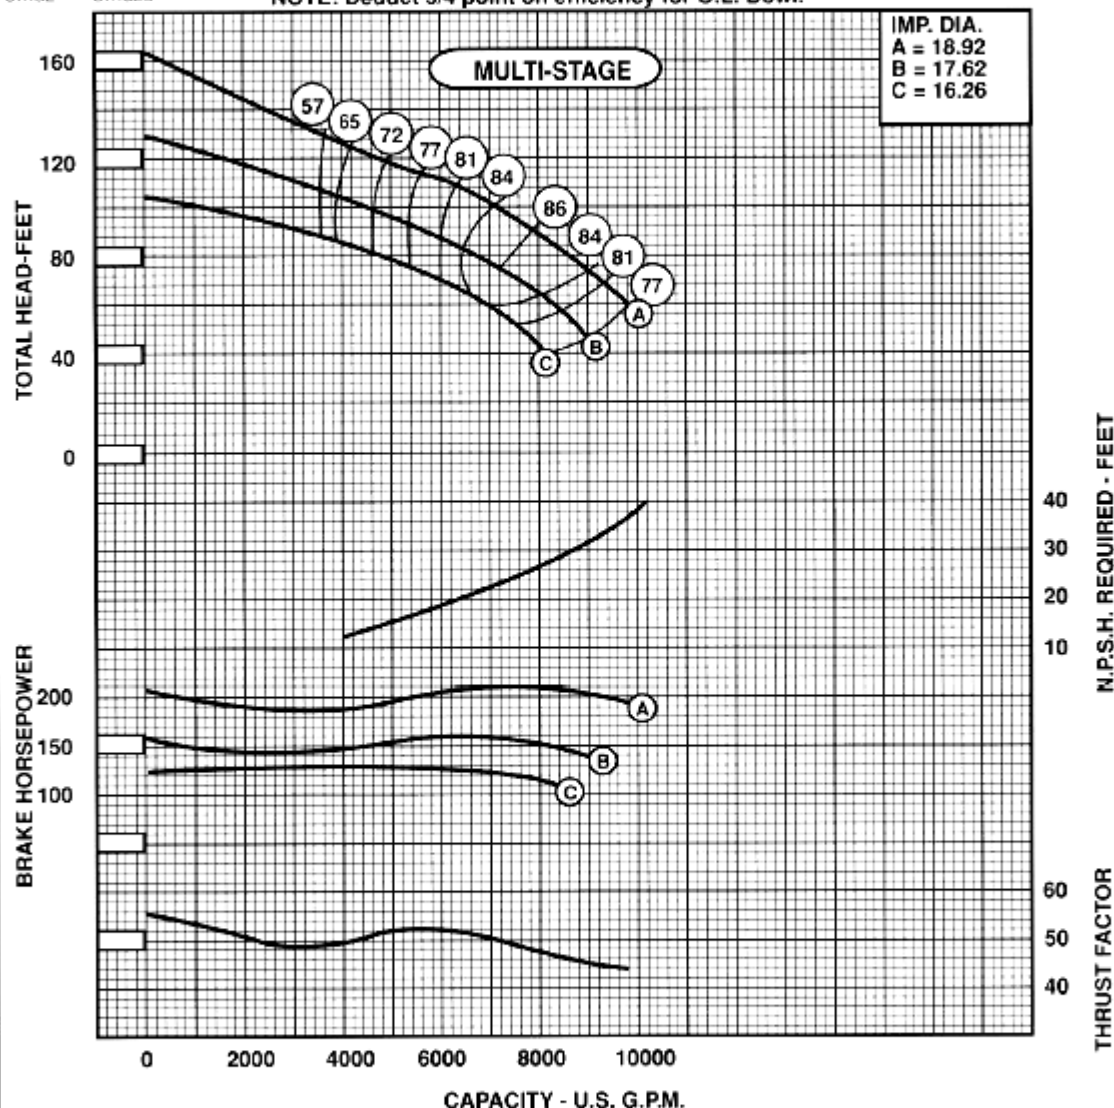
CURVE data**Verli-Line®**

No Stages	Eff Change	MATERIAL	Eff Change
1	0	IMP. - C.I.	
2		IMP. - NI-RI	
3		BOWL - BRZ.	
4		BOWL - NI-RI	

24 AWM**1180**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGEI I
STAGES**PUMP PERFORMANCE****NOTE: Deduct 3/4 point on efficiency for O.L. Bowl.**

EYE AREA - SQ. IN.	= 115	IMPELLER WT. - LBS.	= 140
WV PER IMPELLER LB.-FT. ²	= 40	ONE STAGE WT. - LBS.	= 1300
MAX NO. STD. STAGES	= 4	ADD'L STAGE WT. - LBS.	= 600
MAX OPERATING - P.S.I.	= 300	DISCH. - IN.	= 16
STD. LATERAL - IN.	= 0.44	SUCTION - IN.	= 22 1/2 BELL
STD. SHAFT DIA. - IN.	= 2.688	BOWL CONN. - FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 40	ADD 1/8 1/2" PER ADDITIONAL STAGE	

Curves reflect typical performance. Refer to factory for verification.