

CURVE data

Verti-Line®


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	NO CHG	IMP. - C.I.	-1.0
2	NO CHG		
3	NO CHG		
4	NO CHG		

27BRM**1170**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

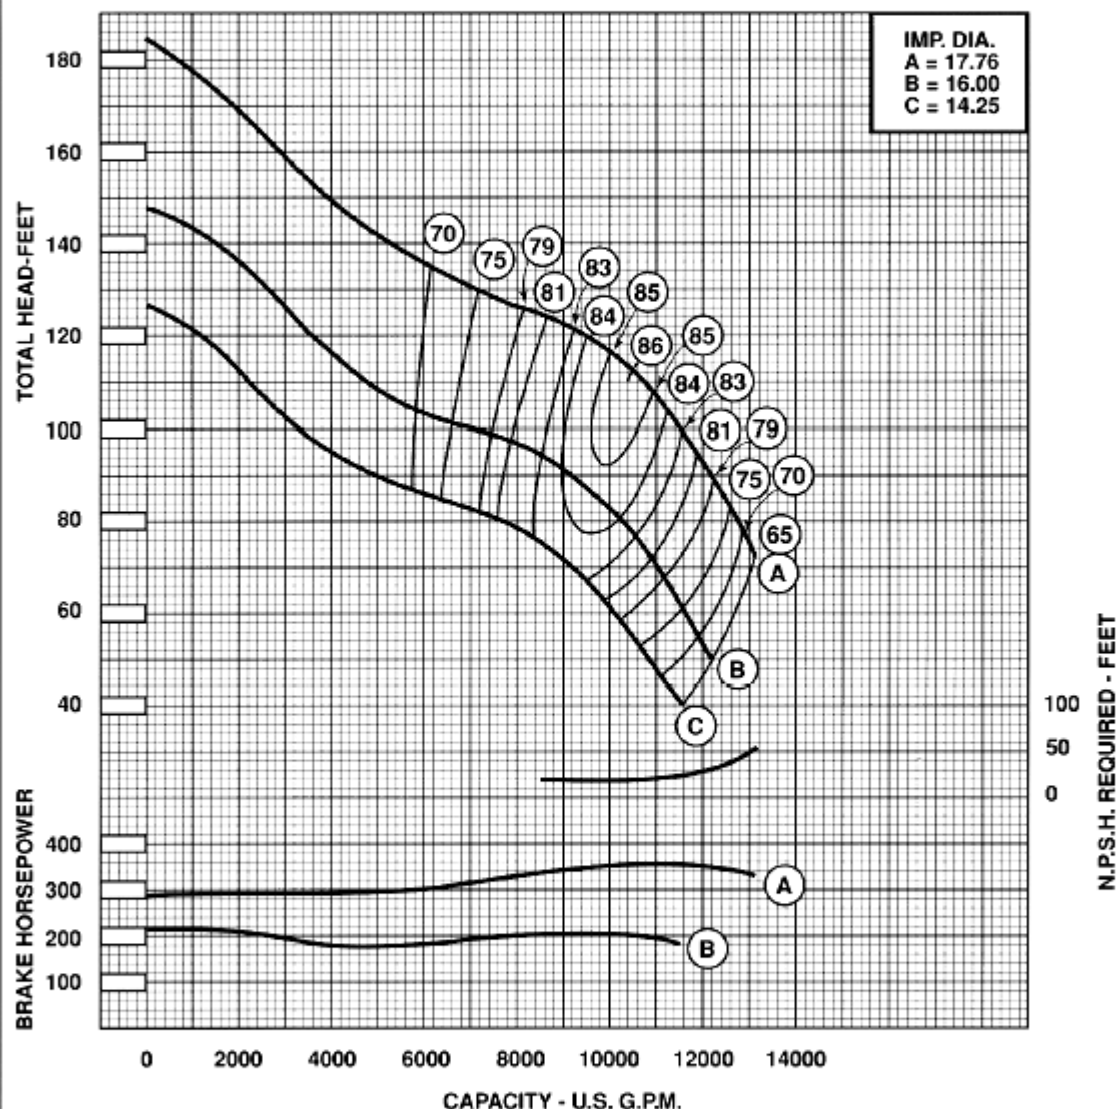PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 139.36	IMPELLER WT. - LBS.	= 225
WR² PER IMPELLER LB.-FT.²	= 60	ONE STAGE WT. - LBS.	= 1388
MAX. SPHERE SIZE	= 2.75	ADD'L STAGE WT. - LBS.	= 340
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= T7MKH92A
MAX. OPERATING - P.S.I.	= ----	DISCH. - IN.	= 20
STD. LATERAL - IN.	= 1.25	SUCTION - IN.	= ----
STD. SHAFT DIA. - IN.	= 3-3/16	MAX. LATERAL - IN.	= ----
MAX. SHAFT DIA. - IN.	= ----	BOWL/IMP. CONN. /	
MIN. SUBMERGENCE - IN.	= 42	ADD 21-1/2" PER ADDITIONAL STAGE.	

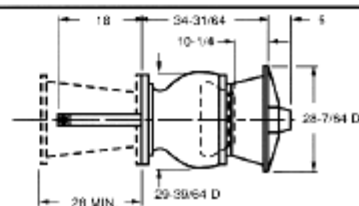

Curves reflect typical performance; refer to factory for certification.