


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1.0	IMP - C.I.	-1.0
2	NO CHG		
3	NO CHG		
4	NO CHG		

28BROHC**1170** R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

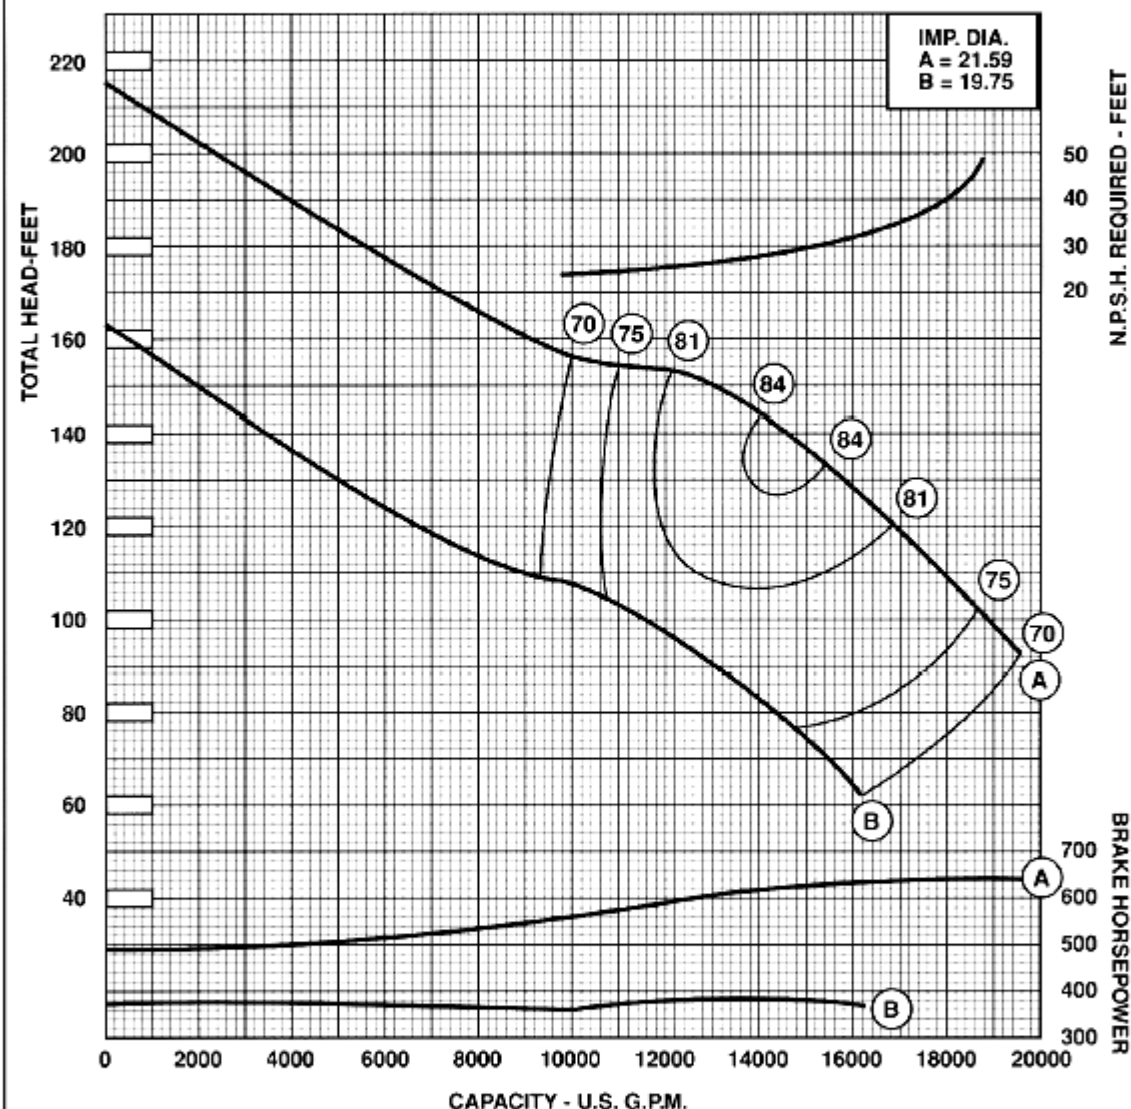PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 197.2
WR. PER IMPELLER LB.-FT. ²	= 107.31
MAX. SPHERE SIZE	= 1.91
MAX. NO. STD. STAGES	= 7
MAX. OPERATING - P.S.I.	= -----
STD. LATERAL - IN.	= 1.05
STD. SHAFT DIA. - IN.	= 4
MAX. SHAFT DIA. - IN.	= -----
MIN. SUBMERGENCE - IN.	= 45

IMPELLER WT. - LBS.	= 190
ONE STAGE WT. - LBS.	= 2420
ADD'L STAGE WT. - LBS.	= 1210
IMPELLER NUMBER	= T5NA768
DISCH. - IN.	= 24
SUCTION - IN.	= -----
MAX. LATERAL - IN.	= -----
BOWL/IMP. CONN.	= -----
ADD 24-1/2 PER ADDITIONAL STAGE.	



Curves reflect typical performance. refer to factory for certification