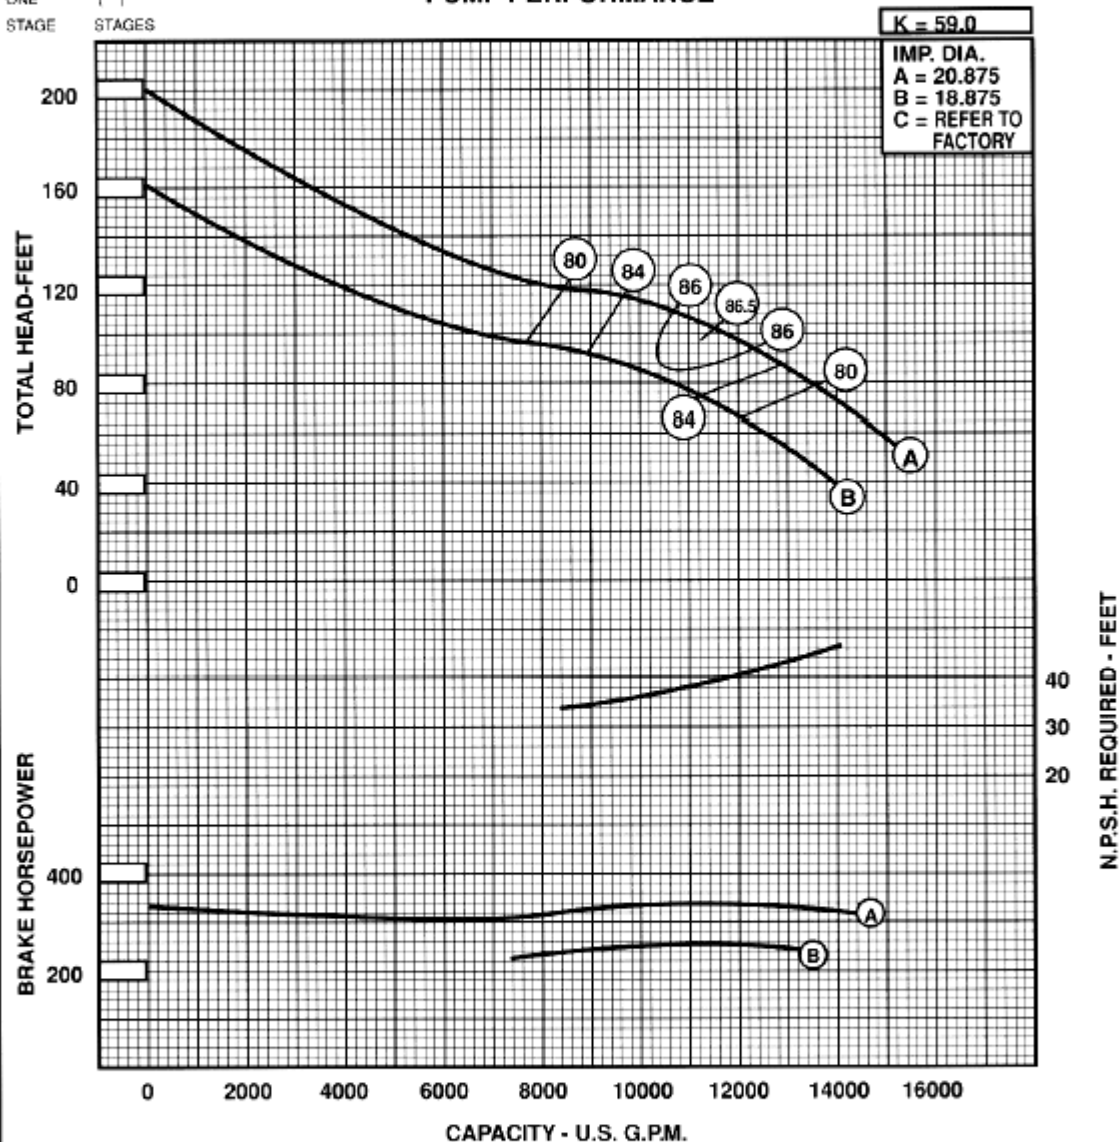


CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-1
4	0	BOWL - NI-R.	-1

28SKKM**1170** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 140.0	IMPELLER WT. - LBS.	= 190
WP/PER IMPELLER LB.-FT. ²	= 61.6	ONE STAGE WT. - LBS.	= 2300
MAX. NO. STD. STAGES	= 2	ADD'L STAGE WT. - LBS.	= 920
MAX. OPERATING - P.S.I.	= 200	DISCH. - IN.	= 16.20
STD. SHAFT DIA. - IN.	= 2.688	SUCTION - IN.	= BELL
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. FLANGED-COLLET	
MIN. SUBMERGENCE - IN.	= 60	ADD 22.75" PER ADDITIONAL STAGE	

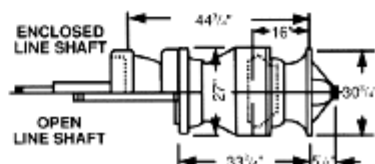

Curves reflect typical performance, refer to factory for certification.