


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-1
4	0	BOWL - NI-R.	-1


10CHLC**1760**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

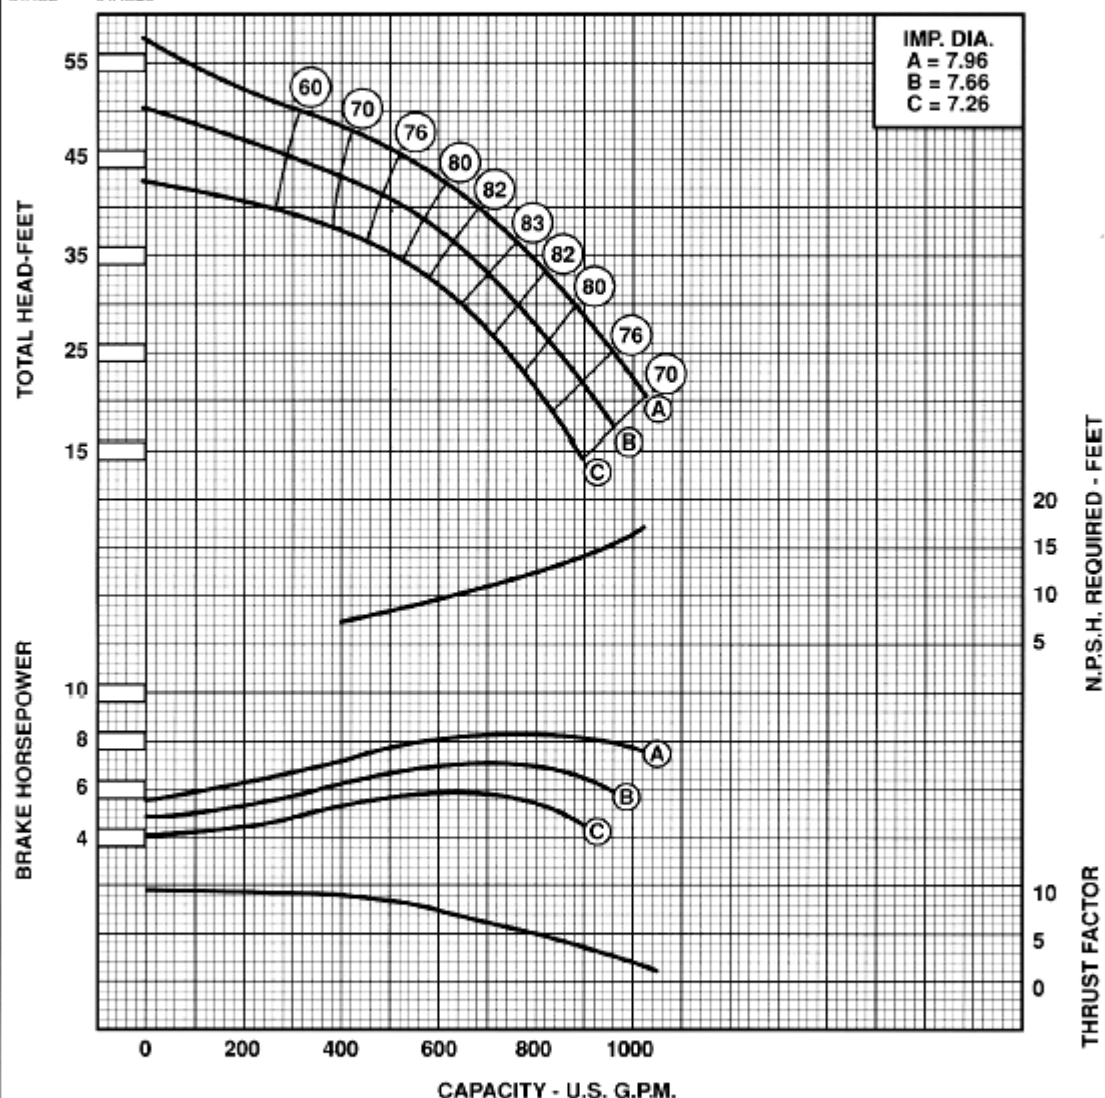ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 16.53	IMPELLER WT. - LBS.	= 13.9
WR*PER IMPELLER LB.-FT. ²	= 0.63	ONE STAGE WT. - LBS.	= 200
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 73
MAX. NO. STD. STAGES	= 18	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 450	DISCH. - IN.	= 6, 7, 8
STD. LATERAL - IN.	= 0.44	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.500	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. THREADED - COLLET	
MIN. SUBMERGENCE - IN.	= 26	ADD 7.7/8" PER ADDITIONAL STAGE.	

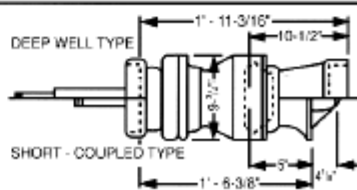

Curves reflect typical performance. refer to factory for certification.