


CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - Ni-Ri	-1
3	0	BOWL - BRZ	-2
4	0	BOWL - Ni-R.	-2

10FHM**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

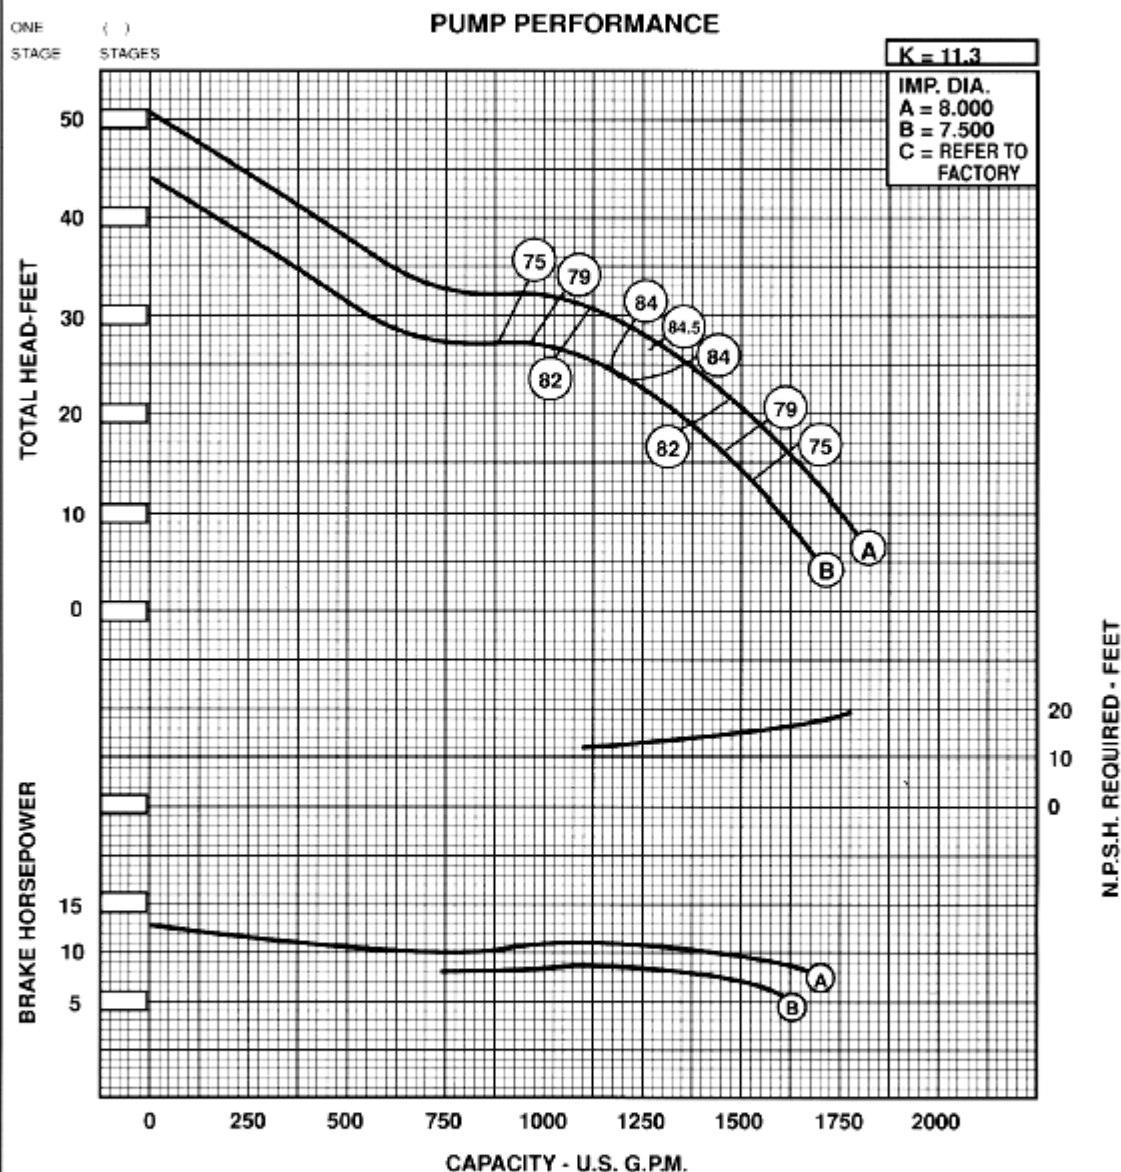

EYE AREA - SQ. IN.	= 29.7	IMPELLER WT. - LBS.	= 41
WR. PER IMPELLER LB.-FT. ²	= 0.84	ONE STAGE WT. - LBS.	= 270
MAX. NO. STD. STAGES	= 20	ADD'L STAGE WT. - LBS.	= 110
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 8
STD. LATERAL - IN.	= 0.375	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.688	BOWL CONN. - FLANGED COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 8.75" PER ADDITIONAL STAGE	
MIN. SUBMERGENCE - IN.	= 23		

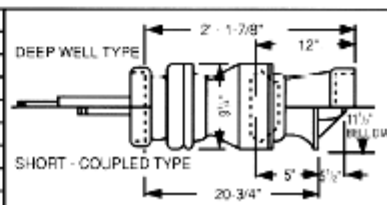

Curves reflect typical performance. refer to factory for certification.