

CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2

10RL**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.


ONE
STAGE**PUMP PERFORMANCE****K = 6.7**

IMP. DIA.
A = 7.750
B = 7.375
C = 7.000

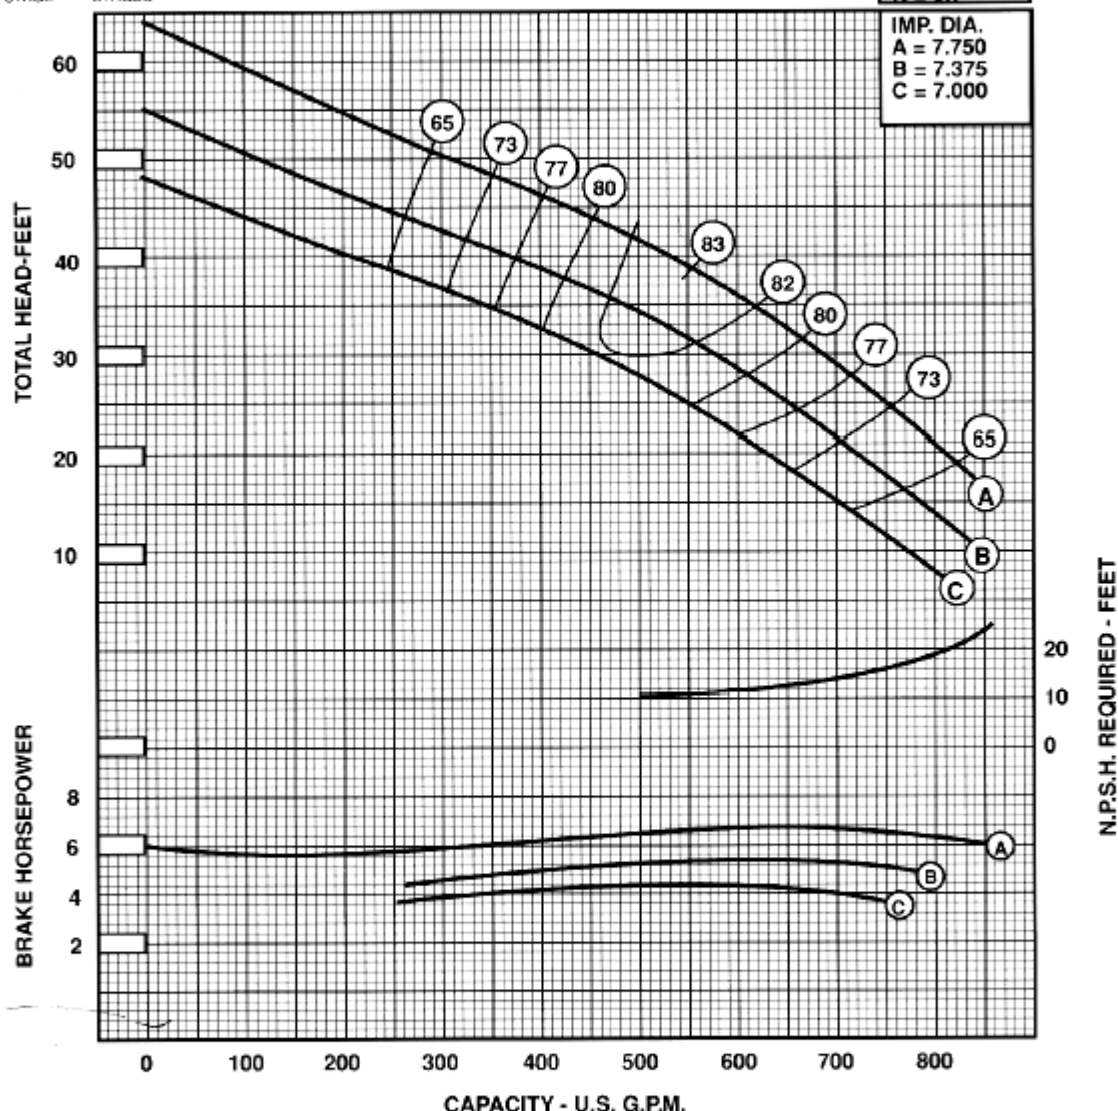

EYE AREA - SQ. IN.	= 18.1
WPI PER IMPELLER LB.-FT. ²	= 0.59
MAX. NO. STD. STAGES	= 11
MAX. OPERATING - P.S.I.	= 330
STD. LATERAL - IN.	= 0.375
STD. SHAFT DIA. - IN.	= 1.688
MAX. SHAFT DIA. - IN.	= —
MIN. SUBMERGENCE - IN.	= 17

IMPELLER WT. - LBS.	= 14
ONE STAGE WT. - LBS.	= 260
ADD'L STAGE WT. - LBS.	= 80
DISCH. - IN.	= 6.8
SUCTION - IN.	= 6
BOWL CONN. - FLANGED-COLET	
ADD 8.375" PER ADDITIONAL STAGE	

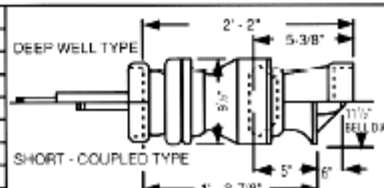

Curves reflect typical performance. refer to factory for verification