


## CURVE data

**Verli-Line®**


| No. Stages | Eff. Change | MATERIAL     | Eff. Change |
|------------|-------------|--------------|-------------|
| 1          | -4          | IMP. - C.I.  | -2          |
| 2          | -2          | IMP. - NI-RI | -1          |
| 3          | -1          | BOWL - BRZ.  | -1          |
| 4          | 0           | BOWL - NI-R. | -1          |

**11 GHHC****1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

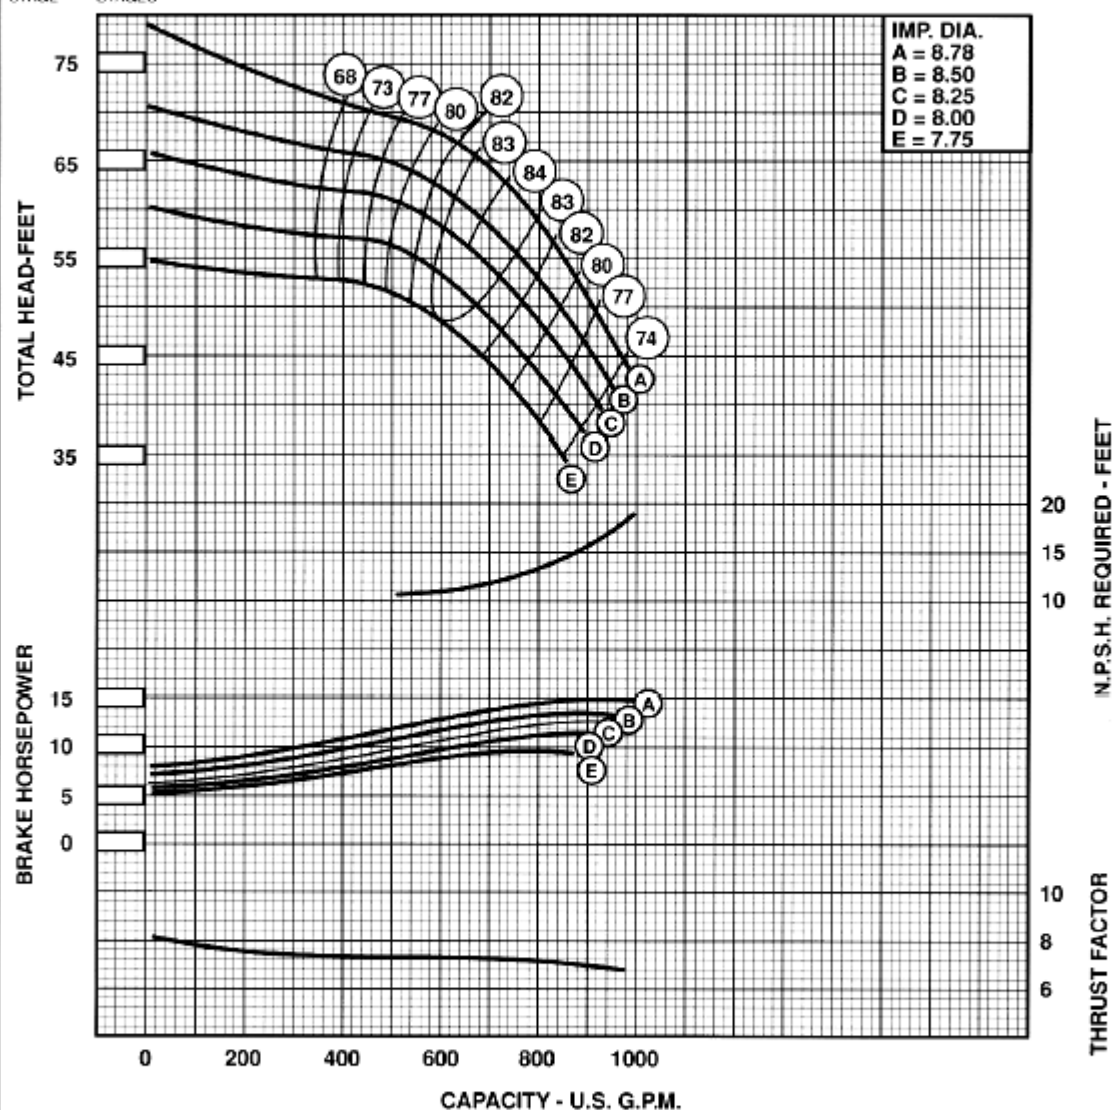ONE  
STAGE ( )  
STAGES**PUMP PERFORMANCE**

|                                       |         |                                 |        |
|---------------------------------------|---------|---------------------------------|--------|
| EYE AREA - SQ. IN.                    | = 14.71 | IMPELLER WT. - LBS.             | = 12.7 |
| WR. PER IMPELLER LB.-FT. <sup>2</sup> | = 0.74  | ONE STAGE WT. - LBS.            | = 186  |
| MAX. SPHERE SIZE                      | = —     | ADD'L STAGE WT. - LBS.          | = 74   |
| MAX. NO. STD. STAGES                  | = 13    | IMPELLER NUMBER                 | = —    |
| MAX. OPERATING - P.S.I.               | = 430   | DISCH. - IN.                    | = 6.8  |
| STD. LATERAL - IN.                    | = 0.62  | SUCTION - IN.                   | = 8    |
| STD. SHAFT DIA. - IN.                 | = 1.500 | MAX. LATERAL - IN.              | = —    |
| MAX. SHAFT DIA. - IN.                 | = —     | BOWL CONN. - FLANGED - COLLET   | = —    |
| MIN. SUBMERGENCE - IN.                | = 22    | ADD 9 3/4" PER ADDITIONAL STAGE | = —    |

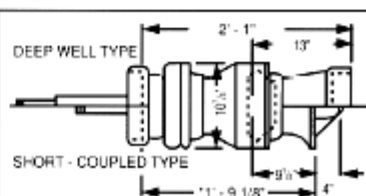

Curves reflect typical performance, refer to factory for certification.