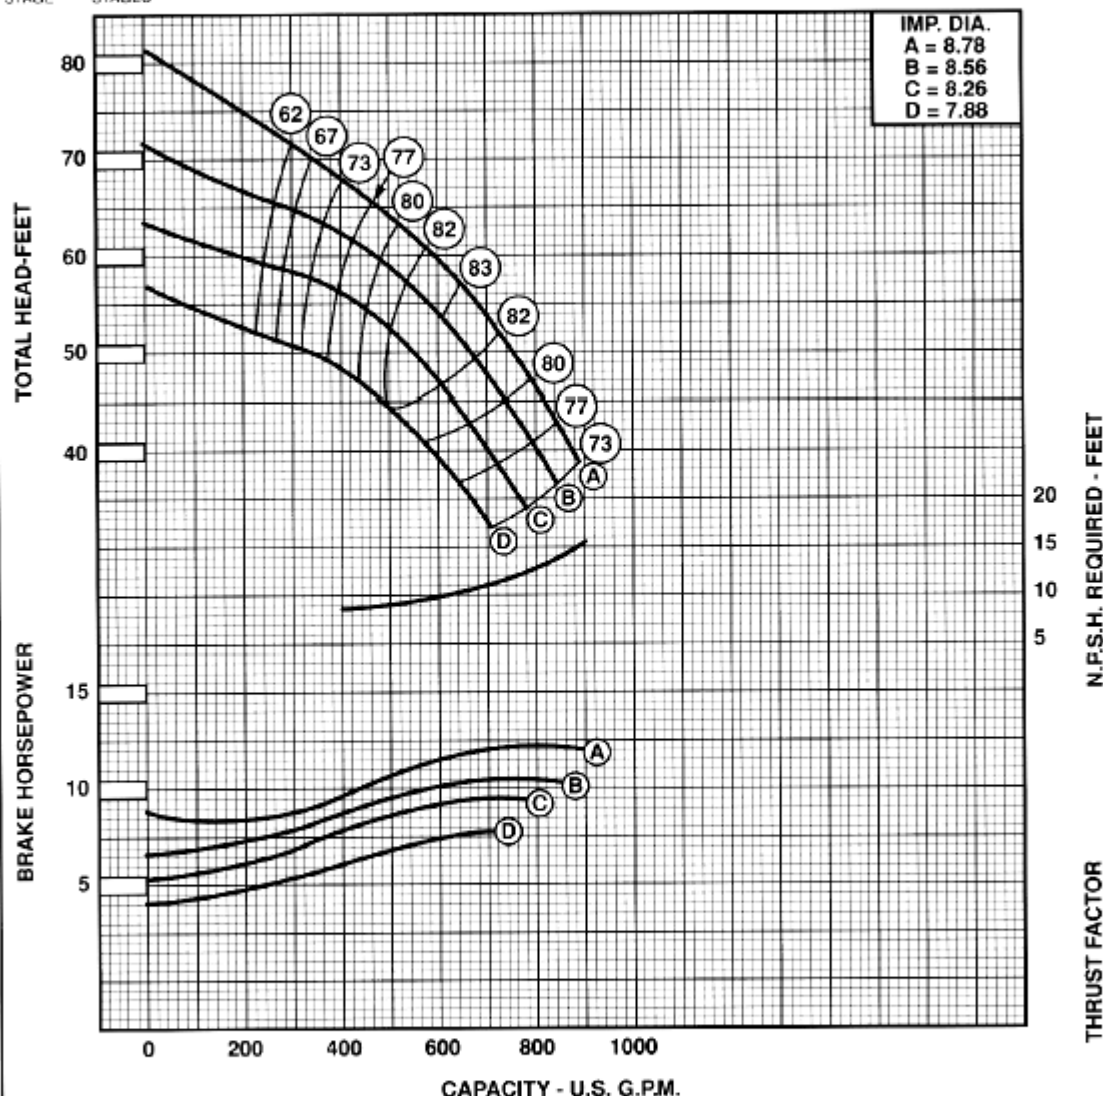


Verli-Line™


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-2
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-1

11GHL**1760** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 14.71	IMPELLER WT. - LBS.	= 12.71
W.P. PER IMPELLER LD. - FT.	= 0.74	ONE STAGE WT. - LBS.	= 186
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 74
MAX. NO. STD. STAGES	= 13	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 430	DISCH. - IN.	= 8.6
STD. LATERAL - IN.	= 0.62	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.500	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. - FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 22	ADD 9.3/4" PER ADDITIONAL STAGE	

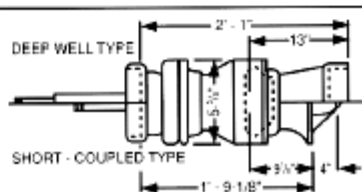

Curves reflect typical performance, refer to factory for certification.