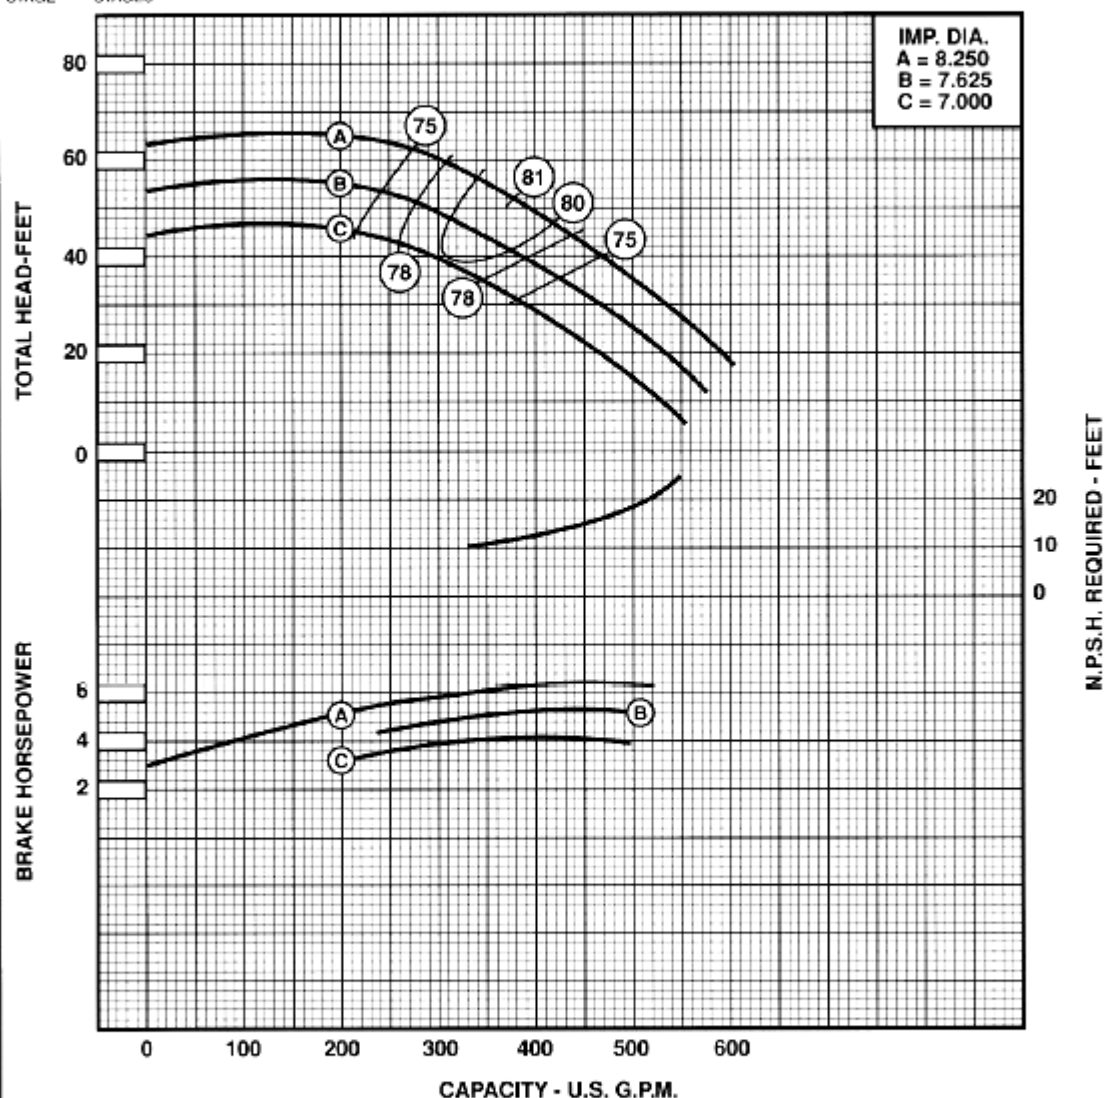


CURVE data**Verli-Line™**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
6	1	BOWL - NI-R.	-2

12ELL**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 11.2	IMPELLER WT. - LBS.	= 22
WR. PER IMPELLER LB.-FT. ²	= .713	ONE STAGE WT. - LBS.	= 100
MAX. SPHERE SIZE	= -----	ADD'L. STAGE WT. - LBS.	= 40
MAX. NO. STD. STAGES	= 30	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 250	DISCH. - IN.	= 6
STD. LATERAL - IN.	= .560	SUCTION - IN.	= 6
STD. SHAFT DIA. - IN.	= 1-1/2	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 21	ADD 7" PER ADDITIONAL STAGE.	

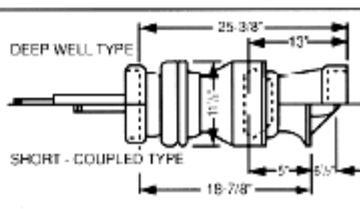

Curves reflect typical performance, refer to factory for certification