

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
6	1	BOWL - NI-R.	-2


12KHHM**1770**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

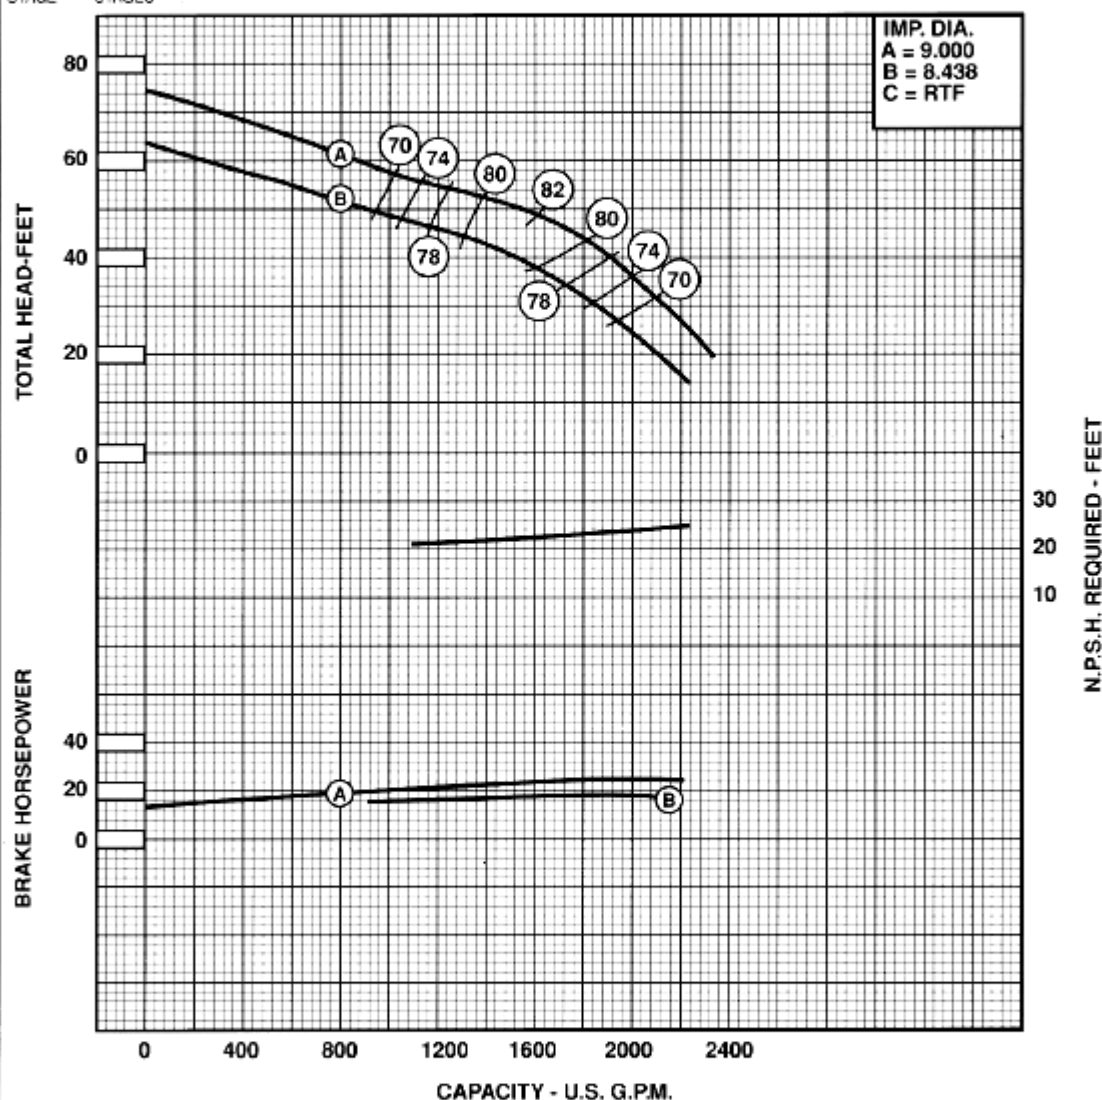ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 28.6	IMPELLER WT. - LBS.	= 28
WRP PER IMPELLER LB.-FT. ²	= 1.12	ONE STAGE WT. - LBS.	= 225
MAX. SPHERE SIZE	=	ADD'L STAGE WT. - LBS.	= 110
MAX. NO. STD. STAGES	= 20	IMPELLER NUMBER	=
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 8
STD. LATERAL - IN.	= .440	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1-11/16	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 21	ADD 8-1/2" PER ADDITIONAL STAGE	

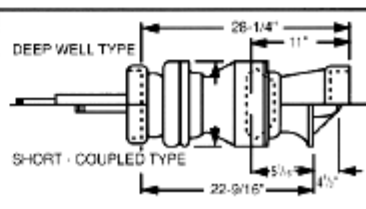

VL177012KHHM1110