

CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ	-2
4	0	BOWL - NI-RI	-2

12RH**1770** R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE****K = 9.4**

IMP. DIA.
A = 9.188
B = 8.750
C = 8.375

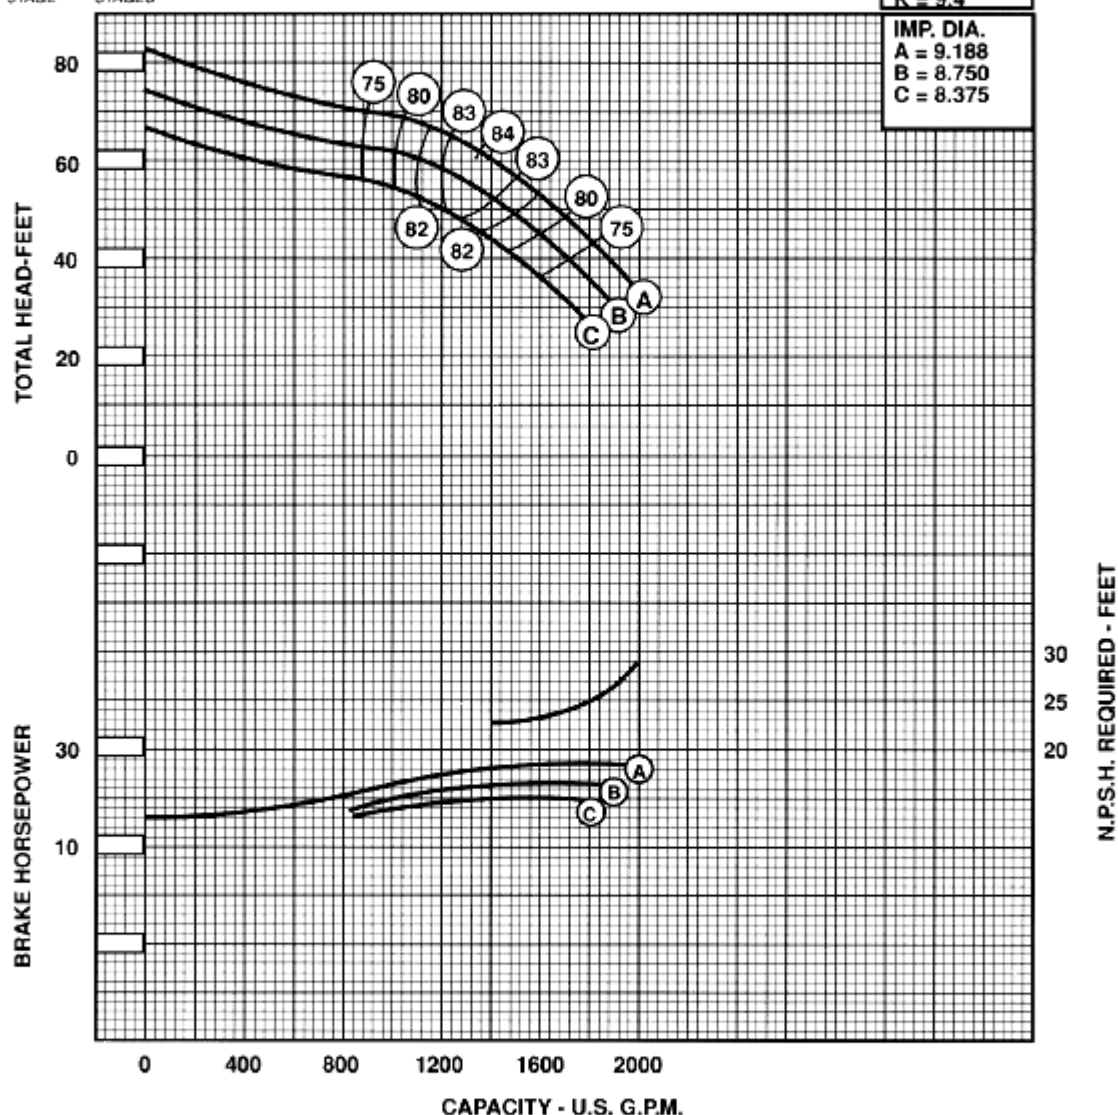

EYE AREA - SQ. IN.	= 25.5	IMPELLER WT. - LBS.	= 16
WRP PER IMPELLER LB.-FT. ²	= 1.3	ONE STAGE WT. - LBS.	= 410
MAX. NO. STD. STAGES	= 11	ADD'L STAGE WT. - LBS.	= 145
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 8.10
STD. LATERAL - IN.	= 0.375	SUCTION - IN.	= 8
STD. SHAFT DIA. - IN.	= 1.938	BOWL CONN. FLANGED-COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 10" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 24		

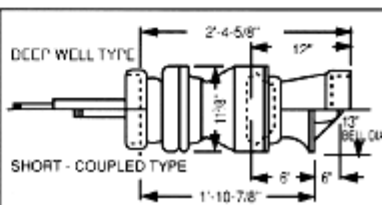

Curves reflect typical performance, refer to factory for certification.