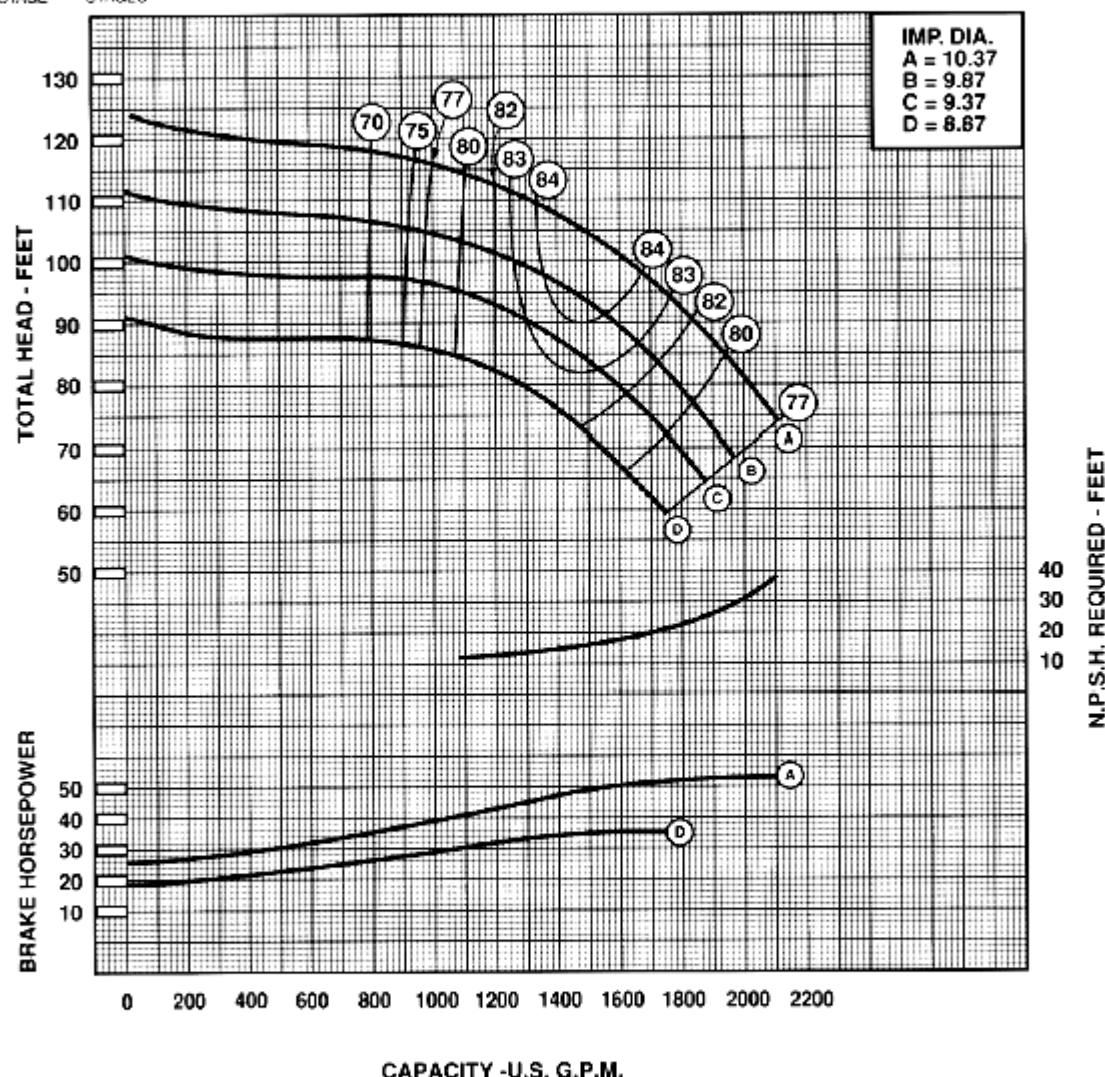


CURVE data**Verli-Line®**


No Stages	Eff Change	MATERIAL	Eff Change
1	-2.0	IMP. - C.I.	-2.0
2	-1.0		
3	NO. CHG.		
4	NO. CHG.		

14BRM**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 24.80	IMPELLER WT. - LBS.	= 37.50
WT. PER IMPELLER LB.-FT. ²	= 3.55	ONE STAGE WT. - LBS.	= 376
MAX. SHIM/NE GZC	= 1 IN.	ADDL. STAGE WT. - LBS.	= 170
MAX. NO. STD. STAGES	= 8	IMPELLER NUMBER	= T7FA02
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	= 10
STD. LATERAL - IN.	= .93	SUCTION - IN.	= 10
STD. SHAFT DIA. - IN.	= 1-15/16	MAX. LATERAL - IN.	= .93
MAX. SHAFT DIA. - IN.	=	BOWL / IMP. CONN.	=
MIN. SUBMERGENCE - IN.	= 35	ADD 9.3/4" PER ADDITIONAL STAGE.	

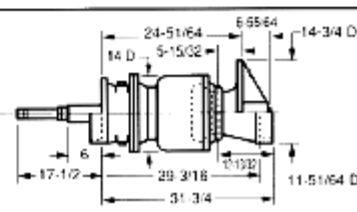

Curves reflect typical performance; refer to factory for certification.