


CURVE data

Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3	IMP. - C.I.	-1
2	-1.5	IMP. - NI-RI	-1
3	-1	BOWL - BRZ	-2
4	0	BOWL - NI-RI	-2


14FHH**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

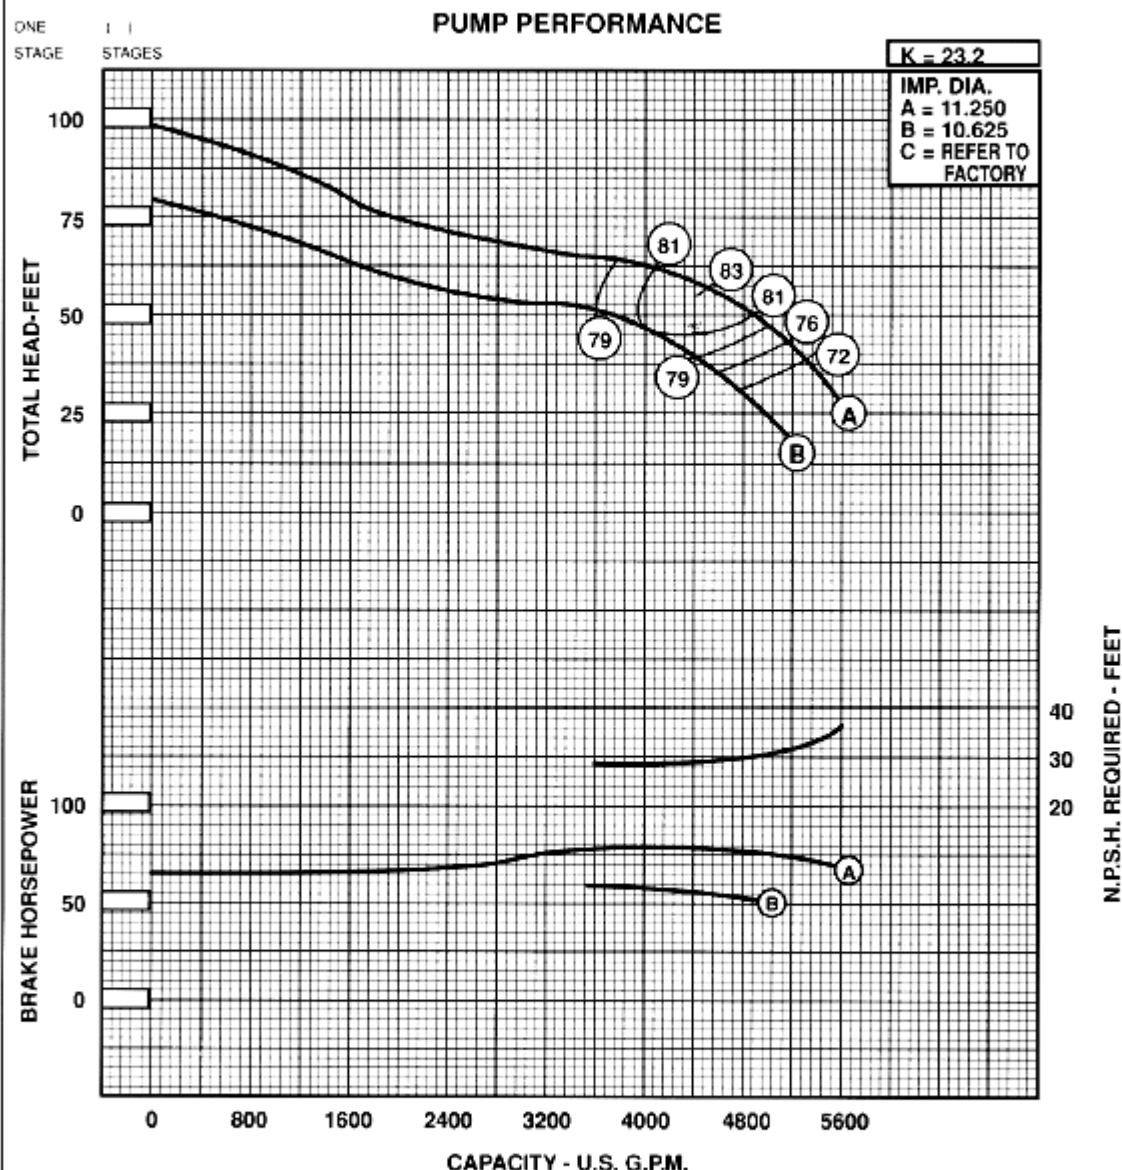

EYE AREA - SQ. IN.	= 56
WR. PER IMPELLER LB.-FT.*	= 2.9
MAX. NO. STD. STAGES	= 9
MAX. OPERATING P.S.I.	= 400
STD. LATERAL - IN.	= 0.560
STD. SHAFT DIA. - IN.	= 2.100
MAX. SHAFT DIA. - IN.	= —
MIN. SUBMERGENCE - IN.	= 38

IMPELLER WT. - LBS.	= 26
ONE STAGE WT. - LBS.	= 650
ADDL. STAGE WT. - LBS.	= 240
DISCH. - IN.	= 12
SUCTION - IN.	= 12
BOWL CONN.	FLANGED-COLLET
ADD 12.313" PER ADDITIONAL STAGE.	

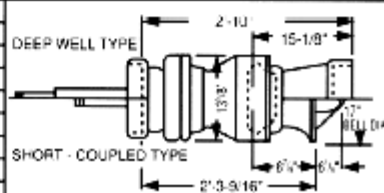

Curves reflect typical performance; refer to factory for certification.