


CURVE data**Verli-Line®**

No Stages	Eff Change	MATERIAL	Eff Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2


16FHH**1770**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

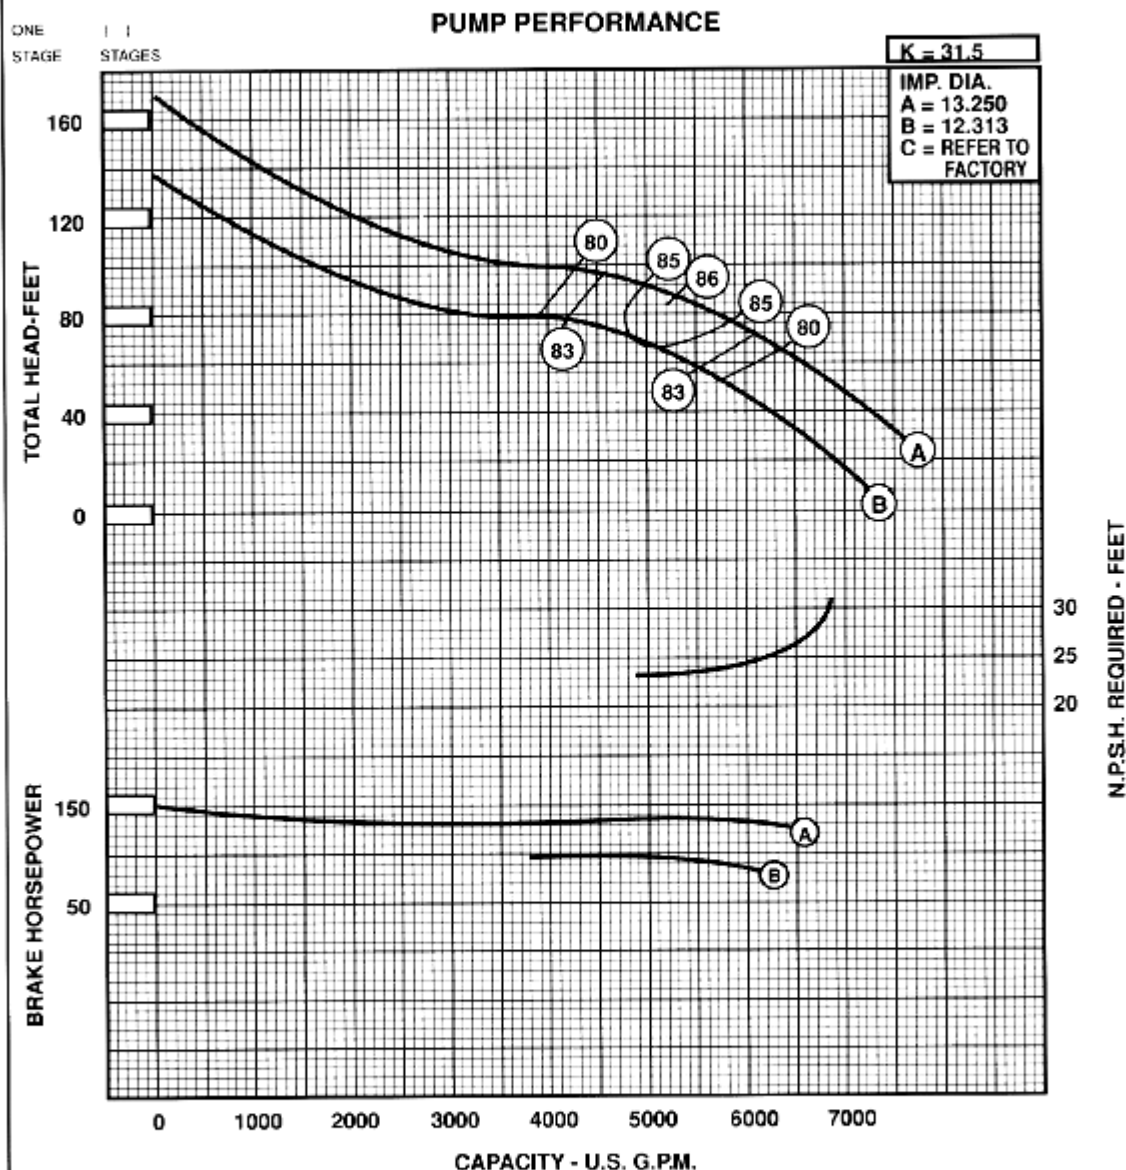

EYE AREA - SQ. IN.	= 78.0	IMPELLER WT. - LBS.	= 36
WR. PER IMPELLER LB.-FT. ²	= 6.38	ONE STAGE WT. - LBS.	= 650
MAX. NO. STD. STAGES	= 8	ADD'L STAGE WT. - LBS.	= 230
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 12.14
STD. LATERAL - IN.	= 0.560	SUCTION - IN.	= BELL
STD. SHAFT DIA. - IN.	= 2.188	BOWL CONN. - FLANGED-COULET	
MAX. SHAFT DIA. - IN.	= —	ADD 14.5" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 45		

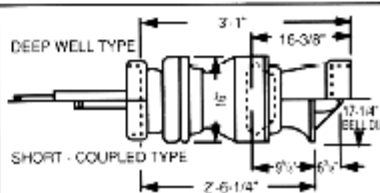

Curves reflect typical performance; refer to factory for certification.