


**CURVE data****Verli-Line®**


| No. Stages | Eff. Change | MATERIAL     | Eff. Change |
|------------|-------------|--------------|-------------|
| 1          | -4          | IMP. - C.I.  | -1          |
| 2          | -2          | IMP. - NI-RI | -1          |
| 3          | -1          | BOWL - BRZ   | -2          |
| 4          | 0           | BOWL - NI-R  | -2          |

**16KHL****1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

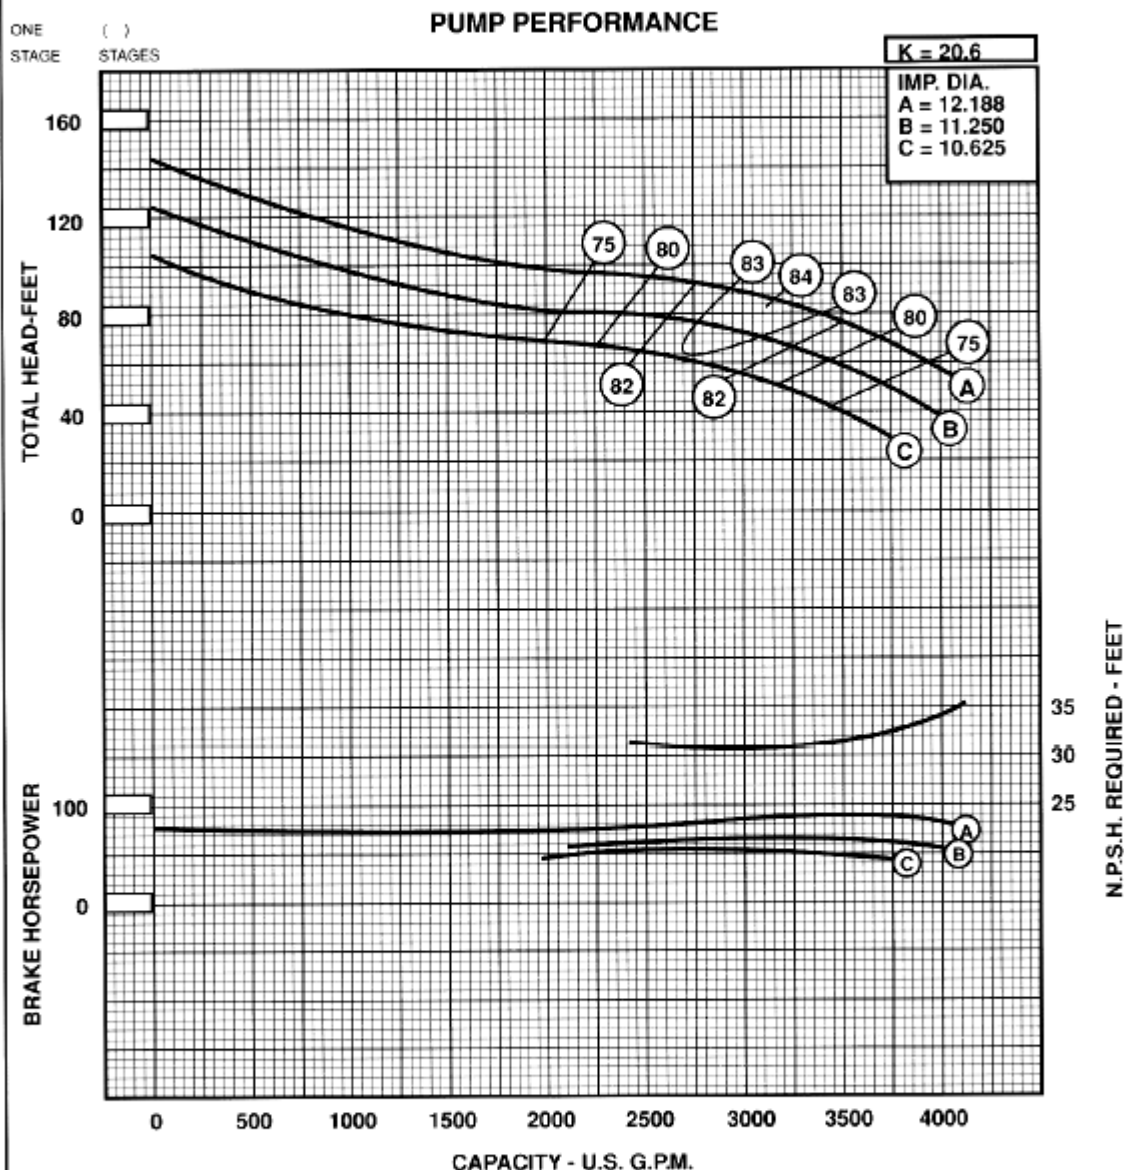

|                                          |         |                              |        |
|------------------------------------------|---------|------------------------------|--------|
| EYE AREA - SQ. IN.                       | = 46.3  | IMPELLER WT. - LBS.          | = 34   |
| W.P.F. PER IMPELLER LB.-FT. <sup>2</sup> | = 4.65  | ONE STAGE WT. - LBS.         | = 600  |
| MAX. NO. STD. STAGES                     | = 6     | ADD'L STAGE WT. - LBS.       | = 225  |
| MAX. OPERATING - P.S.I.                  | = 400   | DISCH. - IN.                 | = 12   |
| STD. LATERAL - IN.                       | = 0.440 | SUCTION - IN.                | = BELL |
| STD. SHAFT DIA. - IN.                    | = 2.188 | BOWL CONN. - FLANGED COLLET  |        |
| MAX. SHAFT DIA. - IN.                    | = —     | ADD 12" PER ADDITIONAL STAGE |        |
| MIN. SUBMERGENCE - IN.                   | = 36    |                              |        |

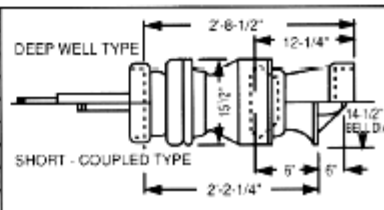

Curves reflect typical performance; refer to factory for certification.