


CURVE data

Verli-Line


No. Stages	Fit Change	MATERIAL	Fit Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ	-2
4	0	BOWL - NI-R	-2

16KHM**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

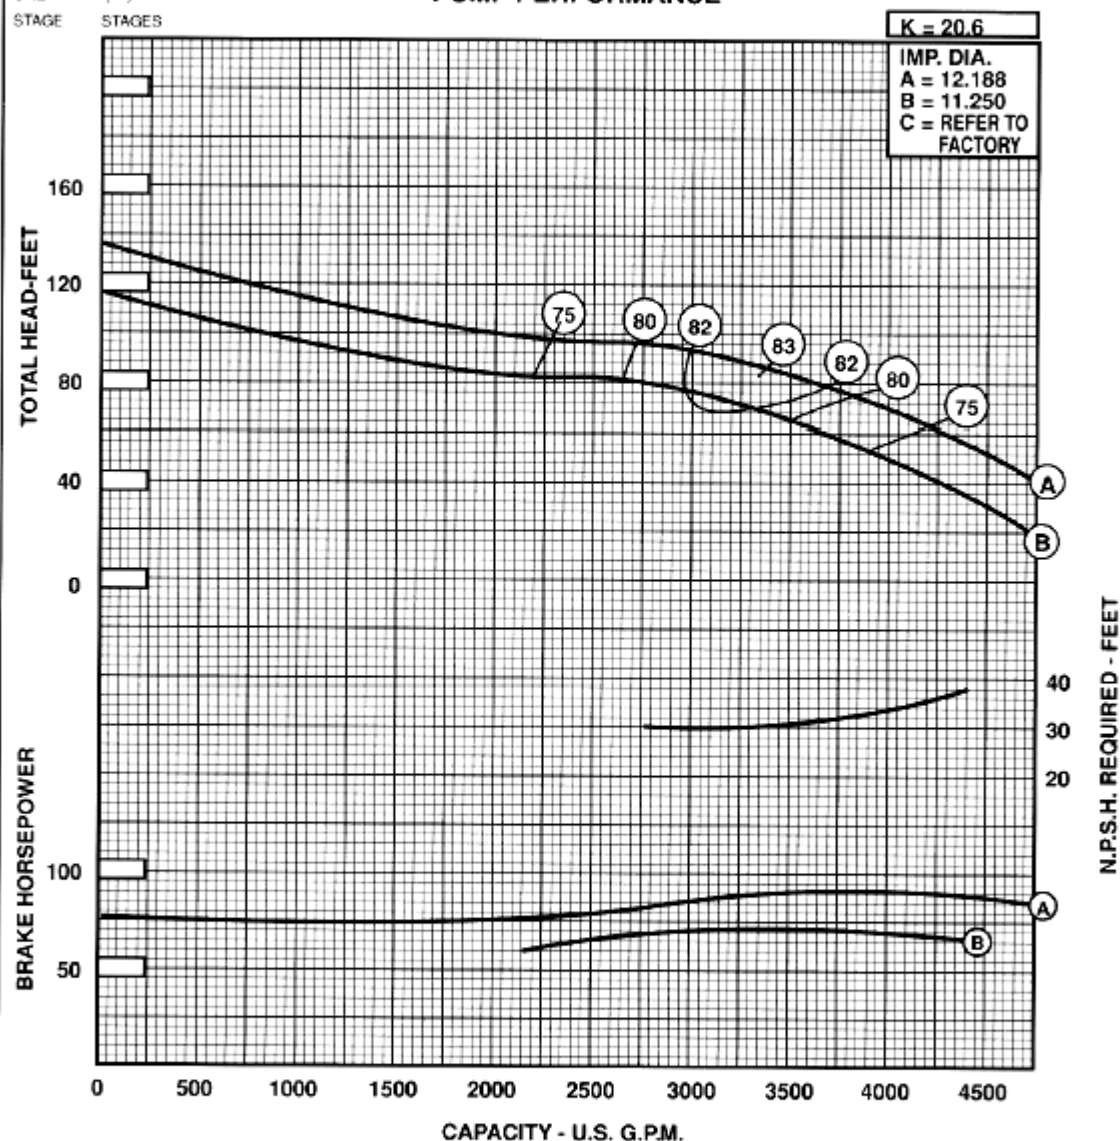ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 45.3	IMPELLER WT. - LBS.	= 34
WRP PER IMPELLER LB.-FT.	= 4.65	ONE STAGE WT. - LBS.	= 600
MAX. NO. STD. STAGES	= 6	ADDL. STAGE WT. - LBS.	= 225
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 12
STD. LATERAL - IN.	= 0.440	SUCTION - IN.	= BELL
STD. SHAFT DIA. - IN.	= 2.188	BOWL CONN. - FLANGED-COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 12" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 38		

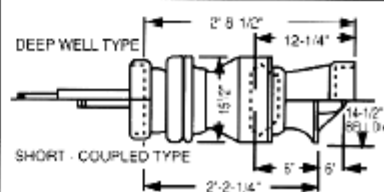

Curves reflect typical performance, refer to factory for certification.