

CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
5	1	BOWL - NI-R.	-2

16KHXL**1770**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.


ONE
STAGE

()

STAGES

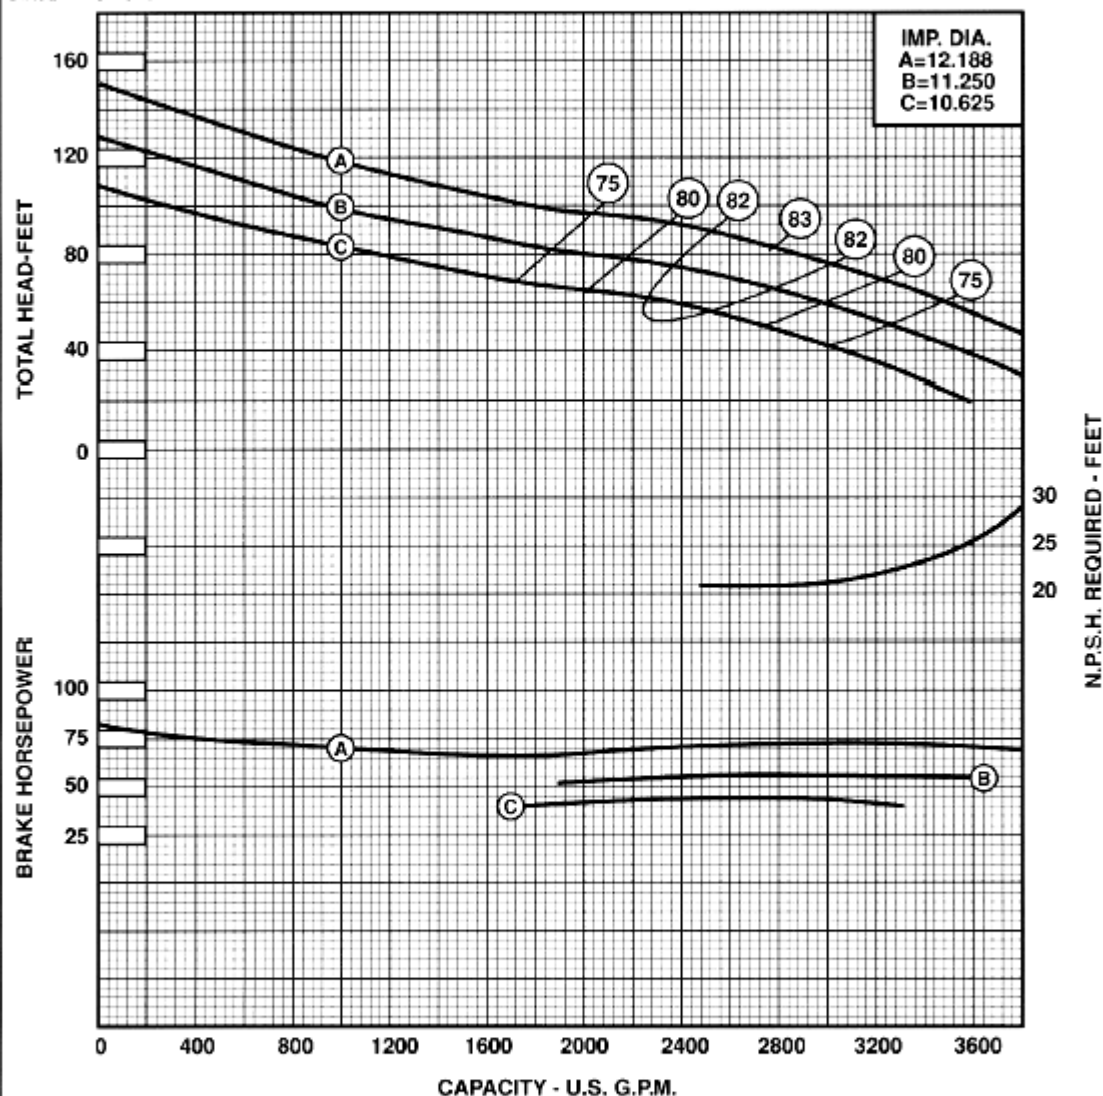PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 46.3	IMPELLER WT. - LBS.	= 51
WP. PER IMPELLER LB. - FT. ²	= 4.85	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 225
MAX. NO. STD. STAGES	= 15	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 14 OD
STD. LATERAL - IN.	= .440	SUCTION - IN.	= 14 OD
STD. SHAFT DIA. - IN.	= 2-3/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 26	ADD 12" PER ADDITIONAL STAGE	

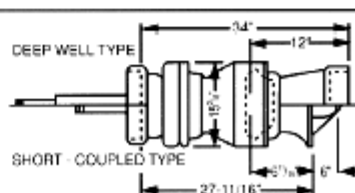

VL177016KHXL1110

Curves reflect typical performance, refer to factory for confirmation.