


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP. - C.I.	-2
2	0	IMP. - NI-RI	-2
3		BOWL - BRZ.	-1
4		BOWL - NI-R.	-1-1/2


18 AWL**1770**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

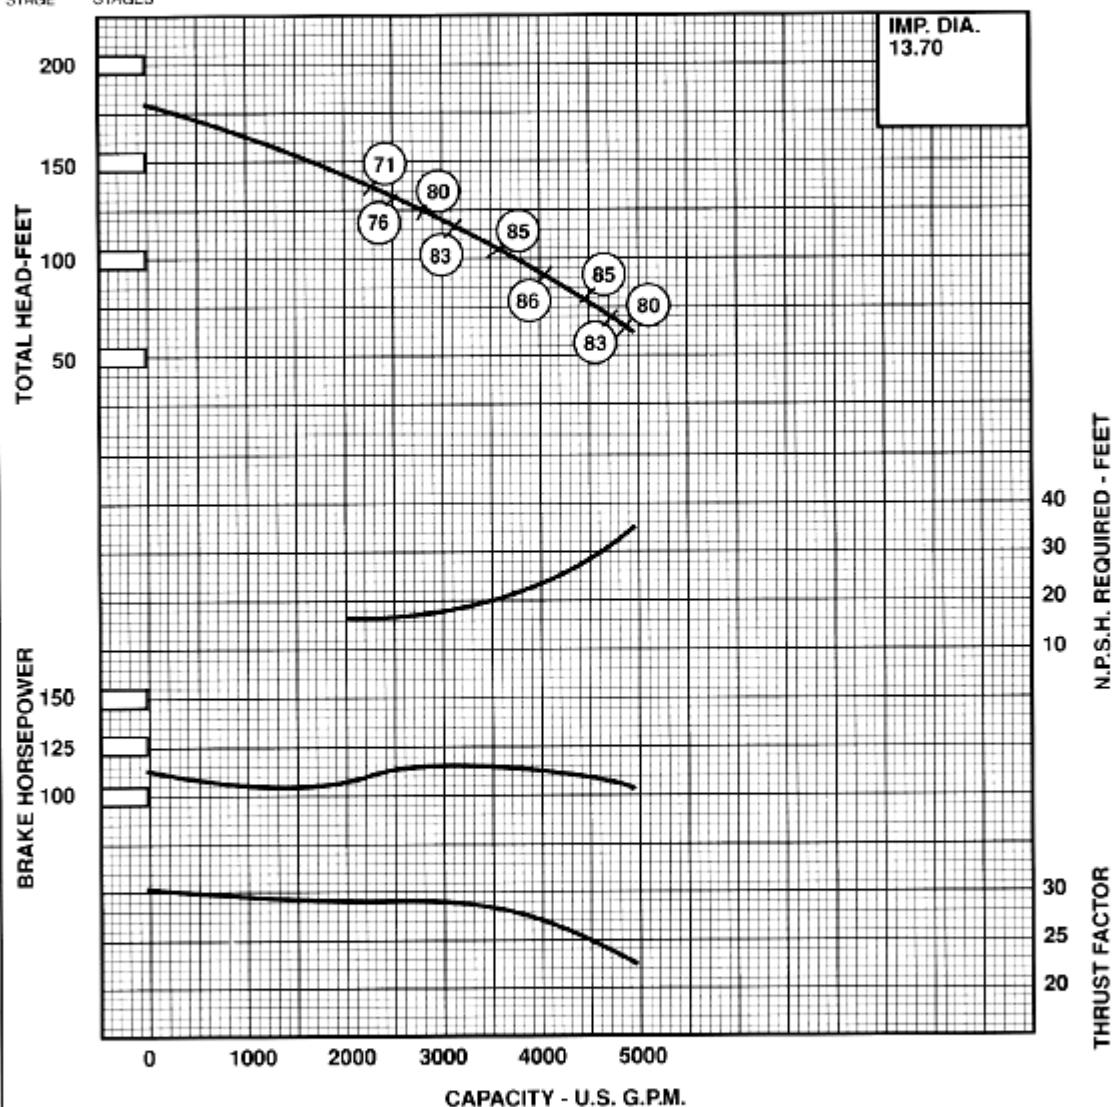ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 59	IMPELLER WT. - LBS.	= 75
WPI PER IMPELLER LB. FT. ²	= 10.2	ONE STAGE WT. - LBS.	= 500
MAX. SPHERE SIZE	= —	ADD'L STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 4	IMPELLER NUMBER	= —
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 14, 12
STD. LATERAL - IN.	= 0.38	SUCTION - IN.	= 17 1/4 BELL
STD. SHAFT DIA. - IN.	= 2.187	MAX. LATERAL - IN.	= —
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. - FLANGED - COLLET	= —
MIN. SUBMERGENCE - IN.	= 40	ADD 10 1/2" PER ADDITIONAL STAGE.	= —

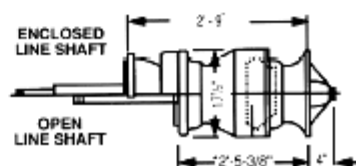

Curves reflect typical performance; refer to factory for certification.