


CURVE data

Verli-Line


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.0	IMP. - C.I.	-1.0
2	-1.0		
3	NO CHG.		
4	NO CHG.		

18BRHC-A**1770** RPM

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

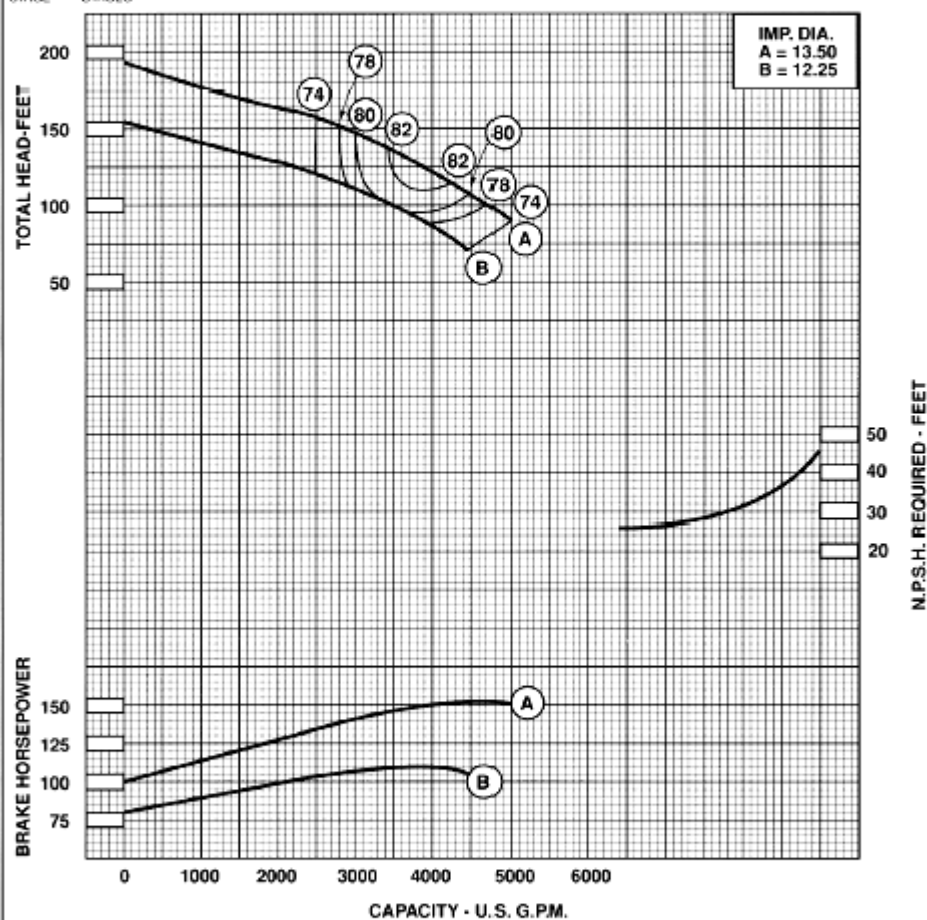ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 59.0	IMPELLER WT. - LBS.	= 50
WIR. PER IMPELLER LB.-FT.	= 10.40	ONE STAGE WT. - LBS.	= 750
MAX. SPHERE SIZE	= 1.13 IN.	ADDTL STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= T9KA00
MAX. OPERATING - PSI	= -----	DISCH. - IN.	= 12
STD. LATERAL - IN.	= 94	SUCTION - IN.	= 12
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL/IMP. CONN. - -----	= -----
MIN. SUBMERGENCE - IN.	= 26	ADD 14-1/8" PER ADDITIONAL STAGE	



Curves reflect typical performance; refer to factory for certification