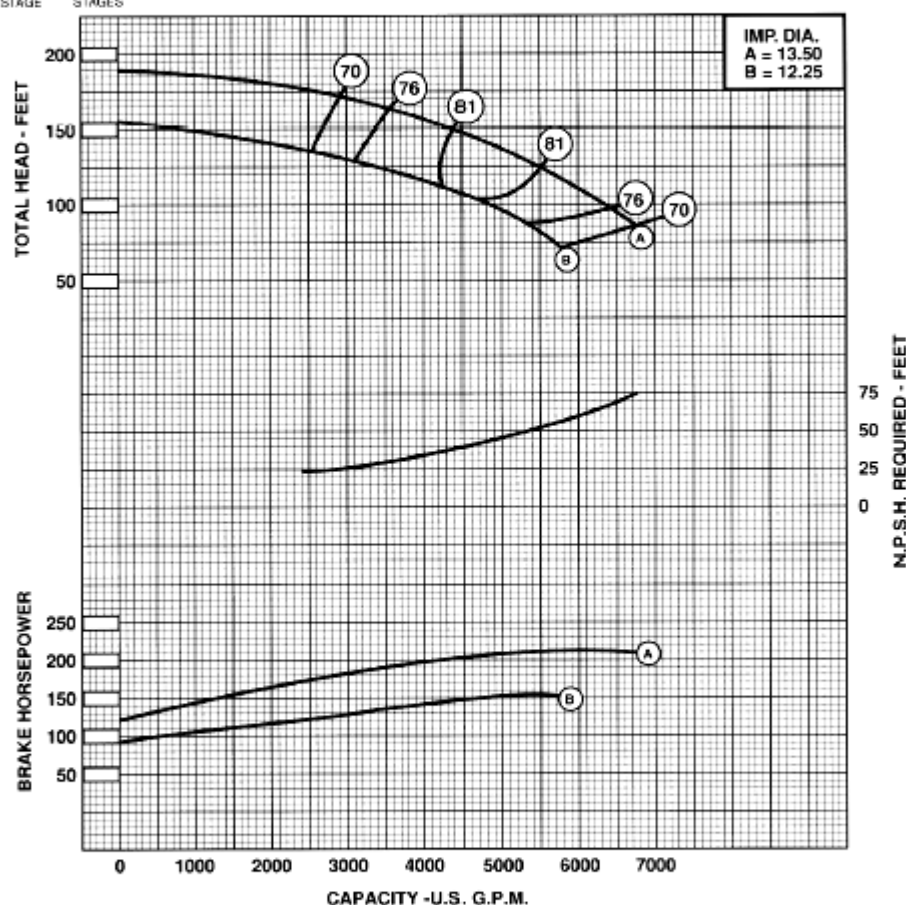


CURVE data**Veri-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.0	IMP. - C.I.	-1.0
2	-1.0		
3	NO CHG.		
4	NO CHG.		

18BRHC-B**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 59	IMPELLER WT. - LBS.	= 60
WIP PER IMPELLER LB.-FT. ²	= 10.40	ONE STAGE WT. - LBS.	= 780
MAX. SPHERE SIZE	= 1.13	ADDL. STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= 75K399
MAX. OPERATING - P.S.I.	= 110	DISCH. - IN.	= 12
STD. LATERAL - IN.	= 94	SUCTION - IN.	= 12
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= 110
MAX. SHAFT DIA. - IN.	= 2-7/16	BOWL / IMP. CONN.	= 1-1/2
MIN. SUBMERGENCE - IN.	= 26	ADD 14-1/8" PER ADDITIONAL STAGE	



Curves reflect typical performance, refer to factory for confirmation