Verti-Line

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	0	IMP. – C.I.	-1
2	0	IMP. – NI-RI	-1
3		BOWL – BRZ.	-1
4		BOWL – NI-R.	-1

19AWH 1770 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

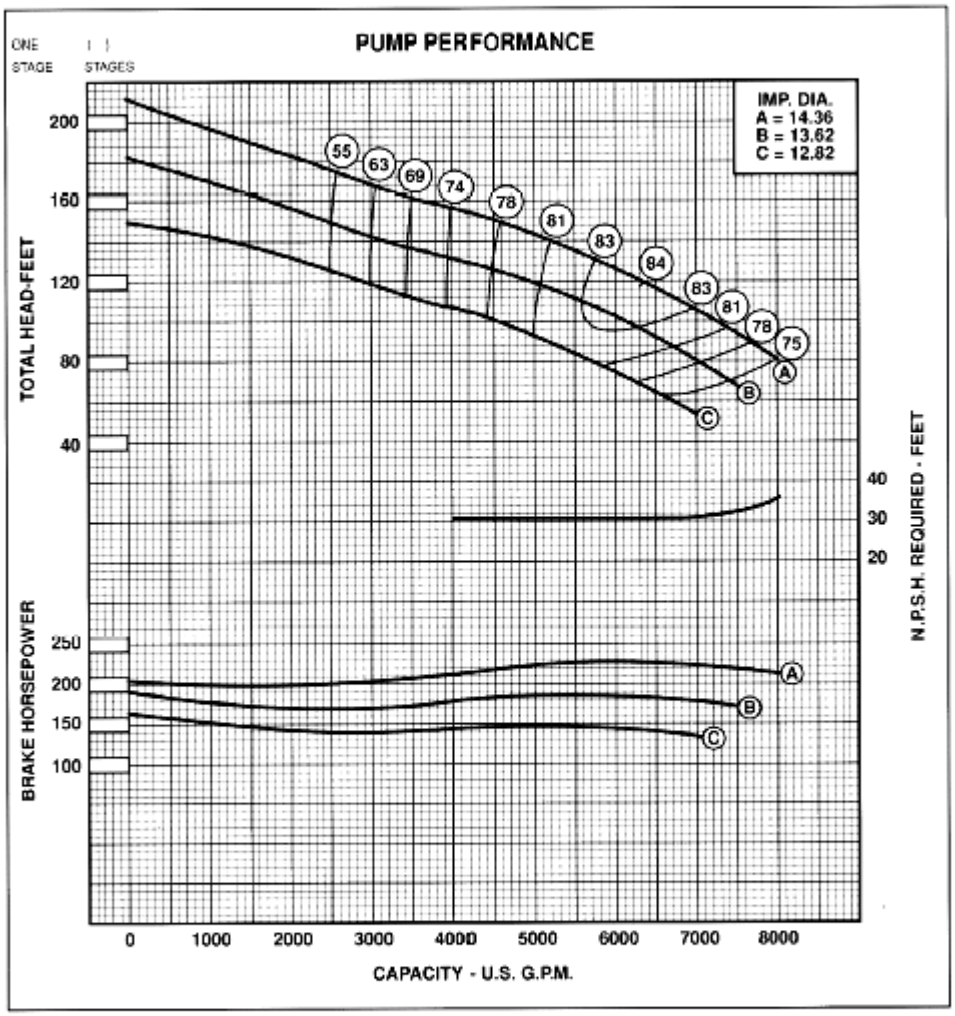

EYE AREA - SQ. IN.	= 42.8	IMPELLER WT. - LBS.	= 58
WR² PER IMPELLER LB.-FT.²	= 7.45	ONE STAGE WT. - LBS.	= 610
MAX. SPHERE SIZE	= ------	ADD'L STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 3	IMPELLER NUMBER	= ------
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 14.15
STD. LATERAL - IN.	= 0.62	SUCTION - IN. (BELL)	= 17-1/4" OR 22-1/2"
STD. SHAFT DIA. - IN.	= 2.187	MAX. LATERAL - IN.	= ------
MAX. SHAFT DIA. - IN.	= ------	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 32	ADD 17-5/8" PER ADDITIONAL STAGE.	



Curves reflect typical performance, refer to factory for certification.