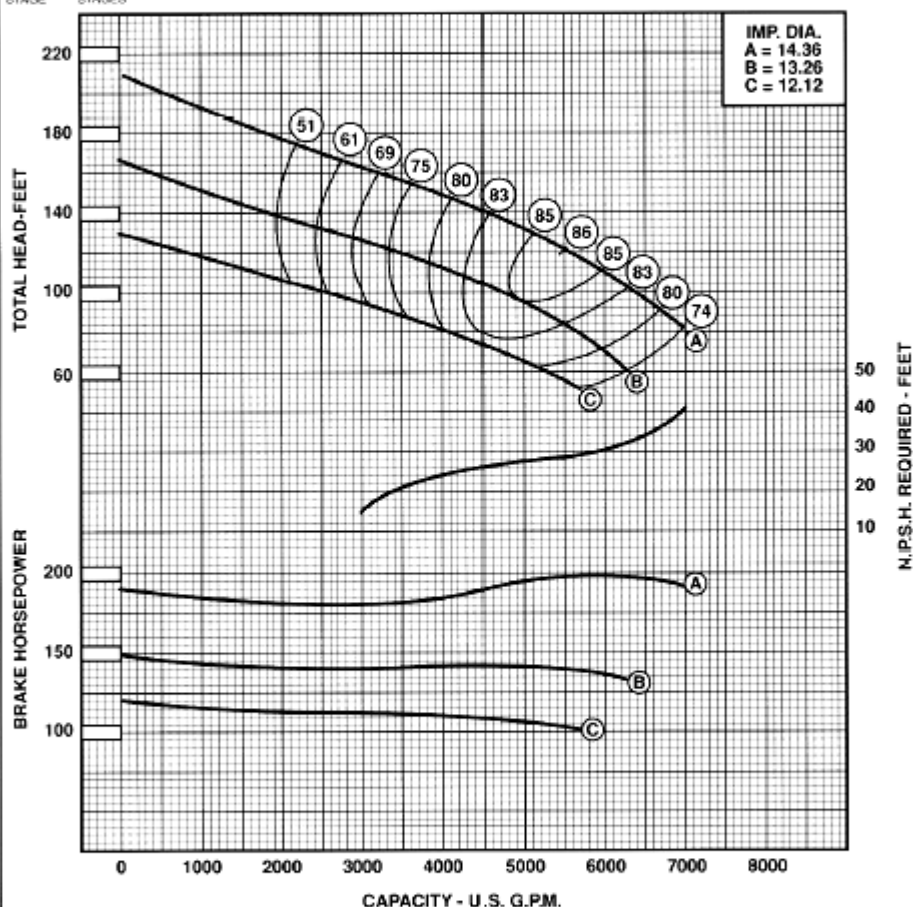


CURVE data**Verli-Line®**


No Stages	Eff Change	MATERIAL	Eff Change
1	0	IMP. - C.L.	-1
2		IMP. - NI-FI	-1
3		BOWL - BRZ	-1
4		BOWL - NI-R	-1

19AWM 1770 R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 68.5	IMPELLER WT. - LBS.	= 58
WPI PER IMPELLER LB.-FT ²	= 7.45	ONE STAGE WT. - LBS.	= 610
MAX. SPHERE SIZE	= -----	ADDL. STAGE WT. - LBS.	= 350
MAX. NO. STD. STAGES	= 3	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 300	DISCH. - IN.	= 14.16
STD. LATERAL - IN.	= 0.62	SUCTION - IN. (BELL)	= 17.1/16" OR 22.1/2"
STD. SHAFT DIA. - IN.	= 2.187	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. - FLANGED - COILET	= -----
MIN. SUBMERGENCE - IN.	= 32	ADD 12.5/F PER ADDITIONAL STAGE	= -----



Curves reflect typical performance. Refer to factory for verification.