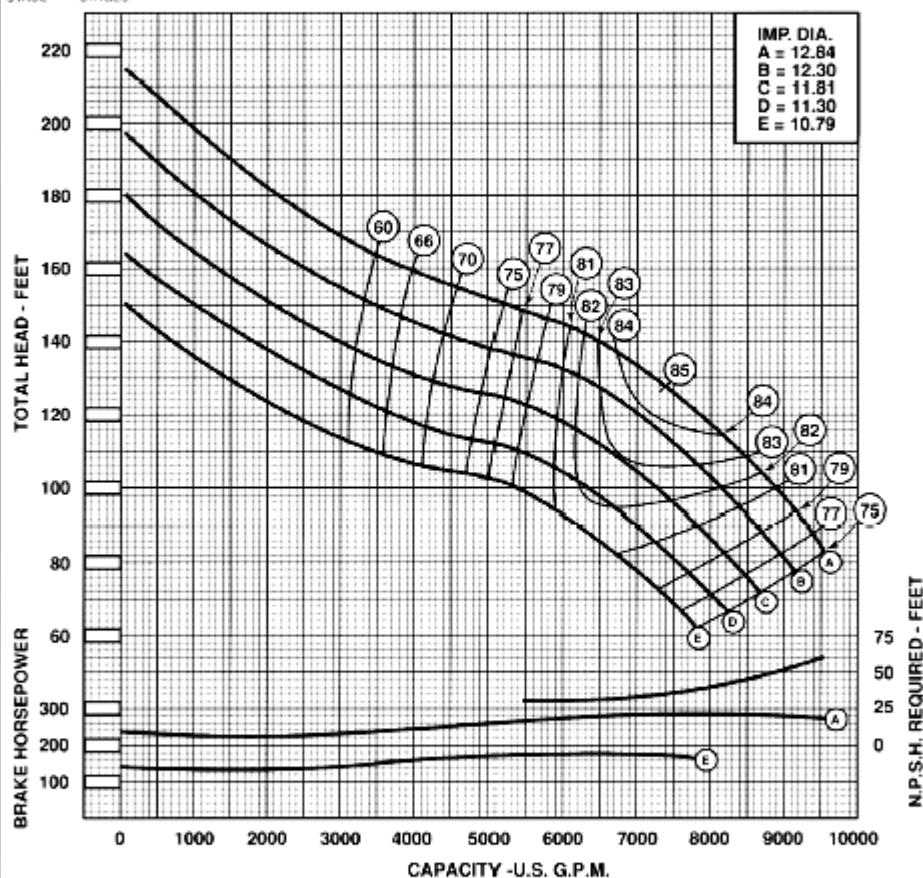


CURVE data**Verli-Line®**


No Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP. - C.I.	-1.0
2	-1.5		
3	-0.5		
4	NO CHG		

21BRH**1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGES. EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 88
W/P. PER IMPELLER LB.-FT.	= 16.90	ONE STAGE WT. - LBS.	= 930
MAX. SPHERE SIZE	= 1.62	ADDL. STAGE WT. - LBS.	= 415
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= T7LK909
MAX. OPERATING - PSI	=	DISCH. - IN.	= 15
STD. LATERAL - IN.	= 94	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL - IMP. CONN. -	=
MIN. SUBMERGENCE - IN.	= 31	ADD 19-1/8" PER ADDITIONAL STAGE.	




Curves reflect typical performance. Refer to factory for confirmation.

CURVE data**Veri-Line**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP - C.I.	-2.0
2	-1.5		
3	-0.5		
4	NO CHG.		

21BRH***1770** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSEPOWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

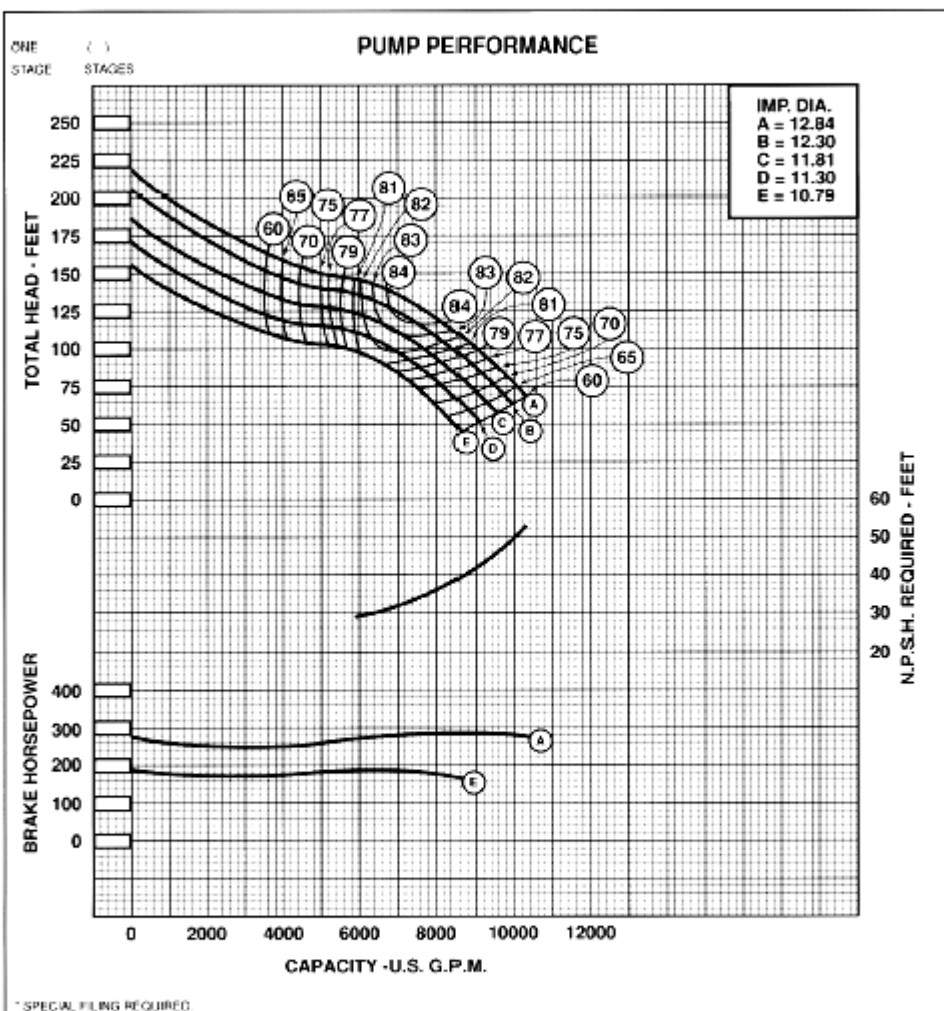

EYE AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 58
W.P. PER IMPELLER LB. FT. ³	= 16.93	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= 1.62	ADD'L. STAGE WT. - LBS.	= 435
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= 17UKB95
MAX. OPERATING - P.S.I.	= 100	DISCH. - IN.	= 16
STD. LATERAL - IN.	= 34	SUCTION - IN.	= 16
STD. SHAFT DIA. - IN.	= 2.715	MAX. LATERAL - IN.	= 16
MAX. SHAFT DIA. - IN.	= 3.0	BOWL/IMP. CONN.	= 16
MIN. SUBMERGENCE - IN.	= 31	ADD 15-1.8" PER ADDITIONAL STAGE	



Curves reflect typical performance; refer to factory for certification